


## Quick Disconnect - Male

Brass  
Tin Plated  
Easy Entry  
P.V.C. Insulation

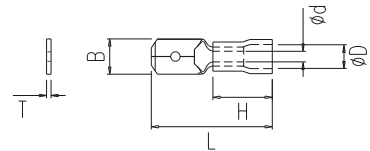

Part No	L	B	T	H	ØD	Ød	Wire Size AWG(mm <sup>2</sup> )	Current Rating	Insulation Color	Qty/Box	Weight/Box
KTL-015-01	19.2	2.8	0.5							4000	1.6 kg
KTL-015-02	19.2	2.8	0.8							4000	2.6 kg
KTL-015-03	19.2	4.8	0.5	10.0	4.0	1.7	22-16 (0.25-1.65)	10 A	Red	3000	1.2 kg
KTL-015-04	19.2	4.8	0.8							3500	2.7 kg
KTL-015-05	21.0	6.3	0.8							4000	2.6 kg
KTL-015-06	19.2	2.8	0.5							4000	1.7 kg
KTL-015-07	19.2	2.8	0.8							3500	2.7 kg
KTL-015-08	19.2	4.8	0.5	10.0	4.3	2.3	16-14 (1.04-2.63)	15 A	Blue	3000	1.3 kg
KTL-015-09	19.2	4.8	0.8							3500	2.9 kg
KTL-015-10	21.0	6.3	0.8							3500	2.5 kg
KTL-015-11	22.5	2.8	0.5							3000	1.9 kg
KTL-015-12	22.5	2.8	0.8							3000	1.9 kg
KTL-015-13	23.0	4.8	0.5	13.7	5.4	3.5	12-10 (2.63-6.64)	24 A	Yellow	3000	2.1 kg
KTL-015-14	23.0	4.8	0.8							3000	2.1 kg
KTL-015-15	24.0	6.3	0.8							2000	2.0 kg

Unit = mm