

## B\_M-1W Series


**1W, SUPERMINIATURE FIXED INPUT  
ISOLATED & UNREGULATED SINGLE OUTPUT  
DC-DC CONVERTER**



Patent Protection RoHS

### PART NUMBER SYSTEM

B0505M-1W

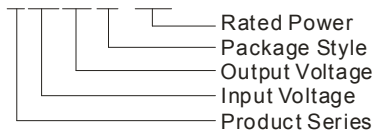

### FEATURES

- Efficiency up to 78%
- Super Miniature SIP Package
- 1KVDC Isolation
- Operating Temperature Range: -40°C to +85°C
- Low Temperature Rise
- No external component required
- Industry standard pinout

### APPLICATIONS

The B\_M-1W Series are designed for application where isolated output is required from a distributed power system.

These products apply to where:

- 1) Input voltage variation  $\leq \pm 10\%$ ;
- 2) 1KVDC input and output isolation;
- 3) Regulated and low ripple noise is not required.

Such as: digital circuits and low frequency analog circuits.

### SELECTION GUIDE

Model Number	Input Voltage(VDC) Nominal (Range)	Output Voltage (VDC)	Output Current (mA)		Input Current (mA)(typ.)		Reflected Ripple Current (mA,typ.)	Max. Capacitive Load( $\mu$ F)	Efficiency (%, typ.) @Max. Load
			Max.	Min.	@Max. Load	@No Load			
B0303M-1W	3.3 (2.97-3.63)	3.3	303	30	373	40	20	220	69
B0305M-1W		5	200	20	389				74
B0505M-1W	5 (4.5-5.5)	5	200	20	251	20			70
B0509M-1W		9	111	12	256				76
B0512M-1W		12	83	9	252				77
B1205M-1W	12 (10.8-13.2)	5	200	20	118	15			70
B1212M-1W		12	83	9	106		77		
B1215M-1W		15	67	7	105		78		

### INPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage (1sec. max.)	3.3VDC input	-0.7	--	5	VDC
	5VDC input	-0.7	--	9	
	12VDC input	-0.7	--	18	
Input Filter		Capacitance Filter			

### OUTPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit	
Output Power		0.1	--	1	W	
Output Voltage Accuracy		See tolerance envelope curve				
Line Regulation	For Vin change of $\pm 1\%$	--	--	$\pm 1.2$	%	
Load Regulation	10% to 100% load	3.3VDC output	--	12		20
		5VDC output	--	10.5		15
		9VDC output	--	8.3		10
		12VDC output	--	6.8		10
15VDC output	--	6.3	10			
Temperature Drift	100% load	--	--	$\pm 0.03$	%/°C	

Ripple & Noise*	20MHz Bandwidth	--	75	150	mVp-p
Short Circuit Protection**		--	--	1	s

Note: 1.\*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.  
2.\*\*Supply voltage must be discontinued at the end of short circuit duration.

## COMMON SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Tested for 1 minute and leakage current less than 1 mA	1000	--	--	VDC
Isolation Resistance	Test at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input/Output, 100KHz/1V	--	30	--	pF
Switching Frequency	Full load, nominal input	--	100	--	KHz
MTBF	MIL-HDBK-217F@25°C	3500	--	--	K hours
Case Material		Plastic (UL94-V0)			
Weight		--	1.05	--	g

## ENVIRONMENTAL SPECIFICATIONS


Item	Test Conditions	Min.	Typ.	Max.	Unit
Storage Humidity	Non condensing	--	--	95	%
Operating Temperature	Power derating (above 85°C)	-40	--	85	°C
Storage Temperature		-55	--	125	
Temp. rise at full load		--	25	--	
Lead Temperature	1.5mm from case for 10 seconds	--	--	300	
Cooling		Free air convection			

## EMC SPECIFICATIONS

EMI	CE	CISPR22/EN55022	CLASS A (External Circuit Refer to Figure1)
EMS	ESD	IEC/EN61000-4-2	Contact ±8KV perf. Criteria B

## EMC RECOMMENDED CIRCUIT

EMI Recommended External Circuit:

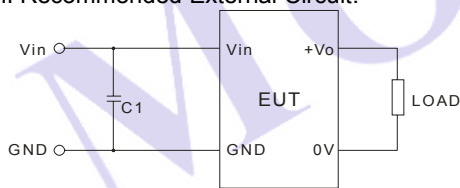

(Figure 1)

Recommended external circuit parameters:

Vin: 3.3V/5V/12V

C1: 1μF/50V

Note: Product bare input of 3.3V、5V、12V already meet CLASS A, but the margin is not enough, add the capacitor margin increase.

## PRODUCT TYPICAL CURVE

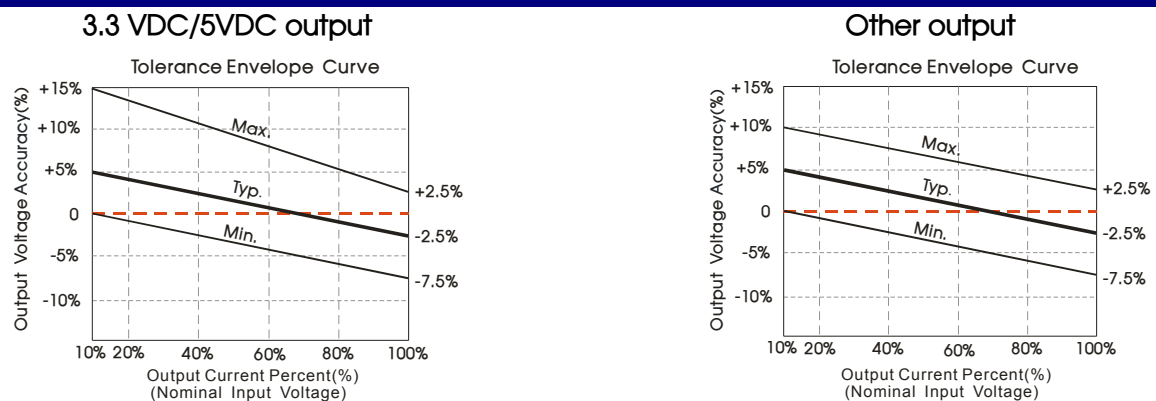


Fig. 1




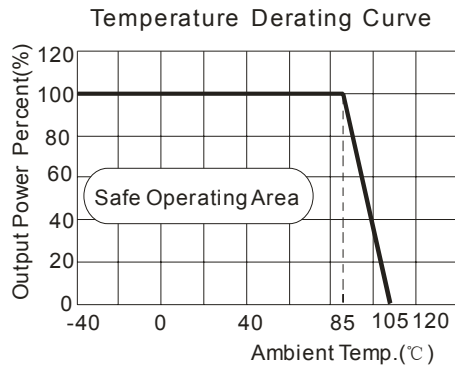


Fig. 2

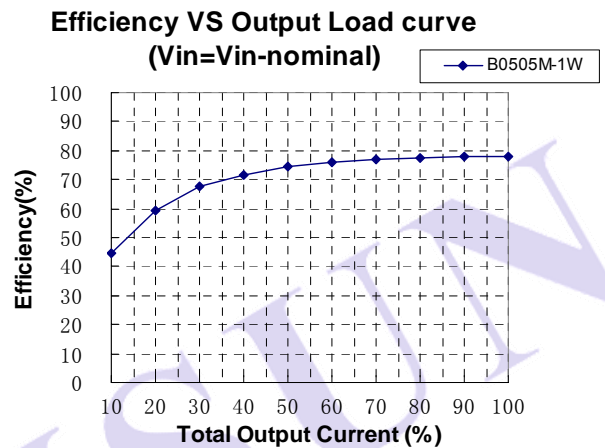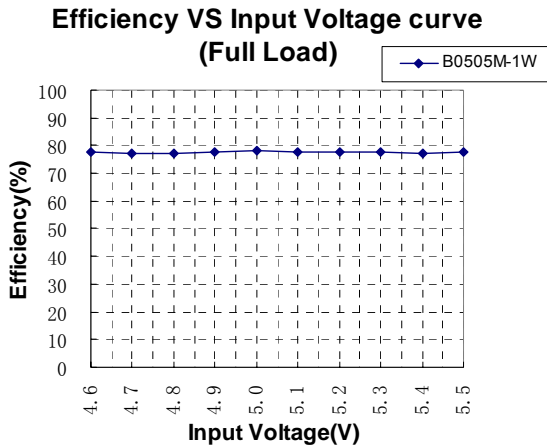

## OUTLINE DIMENSIONS, RECOMMENDED FOOTPRINT & PACKAGING

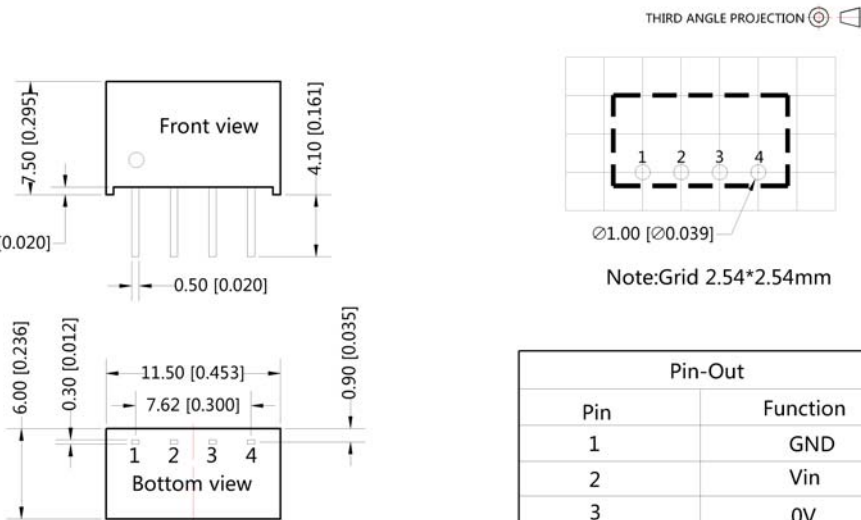


Pin-Out	
Pin	Function
1	GND
2	Vin
3	0V
4	+Vo

Note:  
 Unit :mm[inch]  
 Pin section tolerances:±0.10[±0.004]  
 General tolerances:±0.25[±0.010]

## TEST CONFIGURATIONS

### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor  $L_{in}$  and Capacitor  $C_{in}$  to simulate source impedance.

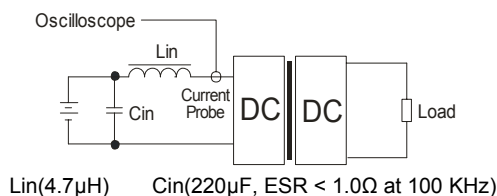

## DESIGN CONSIDERATIONS

### 1) Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load **could not be less than 10% of the full load**. If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power (B\_M-W2 series).


### 2) Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is add a circuit breaker to the circuit.

### 3) Recommended circuit

If you want to further decrease the input/output ripple, an capacitor filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 2).

It should also be noted that the capacitance of filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the recommended capacitance of its filter capacitor sees (Table 1).



(Figure 2)

EXTERNAL CAPACITOR TABLE (TABLE 1)

Vin (VDC)	Cin (μF)	Vout (VDC)	Cout (μF)
3.3/5	4.7	3.3/5	10
12	2.2	9	4.7
--	--	12	2.2
--	--	15	1

It's not recommended to connect any external capacitor in the application field with less than 0.5 watt output.

### 4) Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear regulator and an capacitor filtering network with overheat protection that is connected to the input or output end in series (Figure 3), the recommended capacitance of its filter capacitor sees (Table 1), linear regulator based on the actual voltage and current to reasonable selection.



(Figure 3)

### 5) Cannot use in parallel and hot swap

Note:

1. Packing Information please refer to 'Product Packing Information'. Packing bag number: 58200003;
2. Operation under minimum load will not damage the converter; However, they may not meet all specification listed.
3. Max. Capacitive Load tested at input voltage range and full load.
4. All date in the datasheet are measured according to nominal input voltage, rated output load, TA=25°C, humidity<75%, unless otherwise specified.
5. In this datasheet, all the test methods of indications are based on our corporate standards.
6. The performance in the datasheet is just fit for the part number in the selection guide, and may be different from the customer-designed product, you can get more details from MORNSUN FAE.
7. Contact us for your specific requirement.
8. Specifications subject to change without prior notice.

### MORNSUN Science & Technology Co.,Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou,P.R.China.

Tel: 86-20-38601850

Fax:86-20-38601272

[Http://www.mornsun-power.com](http://www.mornsun-power.com)