


Specifications:
 Contact Resistance: 100mΩ max.
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 3AMP

Dielectric Withstanding
 Voltage: AC 500V For 1 minute
 Operating Temperature: -25°C--+85°C
 Contact: Phosphor Bronze
 Housing: Nylon UL 94V-0

Position	2 Thru 32
A	2.54*Position NO.-2.54
B	2.54*Position NO.

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X. ±0.2 X.' ±2' .X ±0.1 .X' ±1' .XX ±0.05 .XX' ±0.5' .XXX ±0.01
图名/Title			文件编号/File No.	
130A(单排)产品图			QJ/XYT-12061	
备注/Remark			页序/Sheet	单位/units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

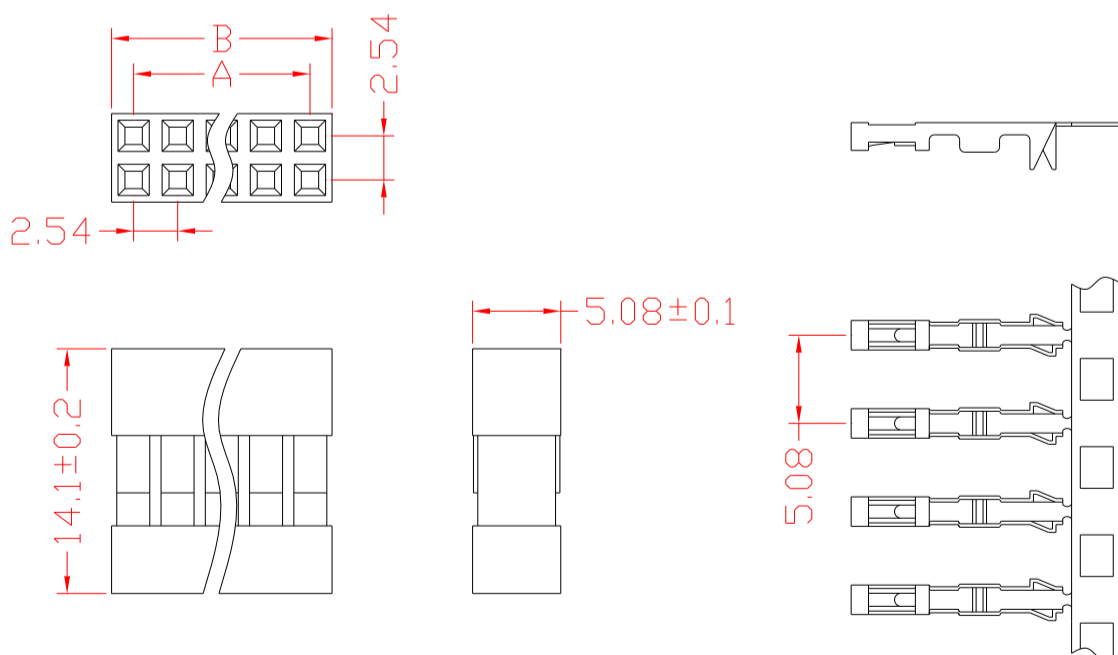

Specifications:
 Contact Resistance: 100mΩ max.
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 3AMP

Dielectric Withstanding
 Voltage: AC 500V For 1 minute
 Operating Temperature: -25°C--+85°C
 Contact: Phosphor Bronze
 Housing: Nylon UL 94V-0

Dimension	4 thru 64
A	2.54*Position NO./2-2.54
B	2.54*Position NO./2

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X. ±0.2 X.' ±2' .X ±0.1 .X' ±1' .XX ±0.05 .XX' ±0.5' .XXX ±0.01
图名/Title			文件编号/File No.	
130A(双排)产品图			QJ/XYT-12062	
备注/Remark			页序/Sheet	单位/units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------