


### SPECIFICATIONS

Current Rating: 5A  
 Voltage Rating: 250V  
 Insulation resistance: 1000MΩ  
 Contact Resistance: 10mΩ Max  
 Withstanding Dielectric Voltage: 1500V AC/minute  
 Operation temperature: -25~+85°C






### MATERIAL

Material: LCP, UL94 V-0, Black  
 Contact Material: Brass

### ORDER INFORMATION

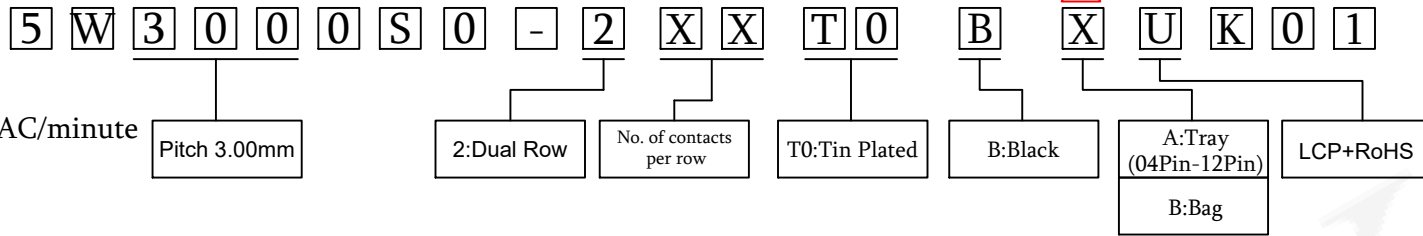

Circuits	Dim.A	Dim.B
2x1		6.65
2x2	3.0	9.65
2x3	6.0	12.65
2x4	9.0	15.65
2x5	12.0	18.65
2x6	15.0	21.65
2x7	18.0	24.65
2x8	21.0	27.65
2x9	24.0	30.65
2x10	27.0	33.65
2x11	30.0	36.65
2x12	33.0	39.65

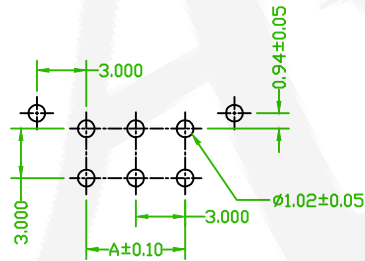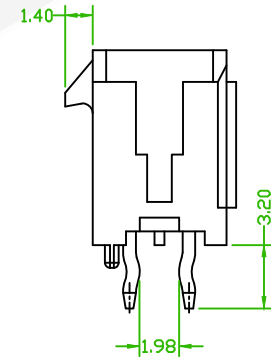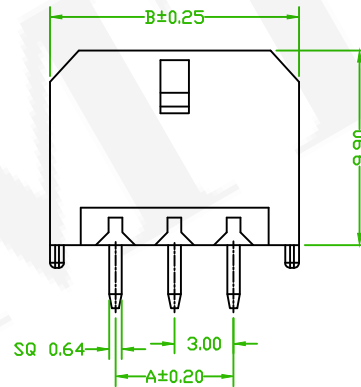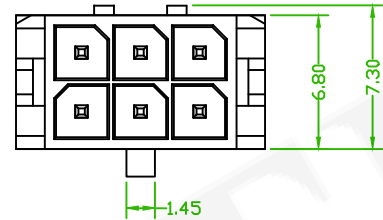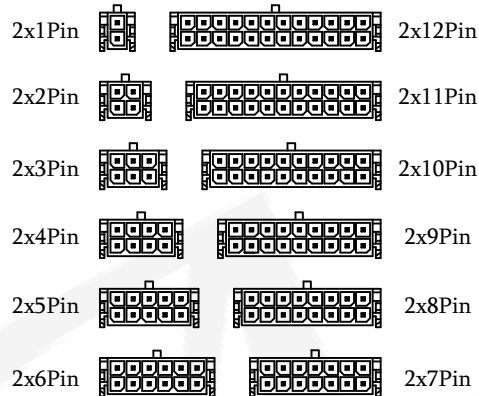

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	3.0mm WAFER D/R V/T DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5W3000S0-2XXXT0BXUK01			繪圖 DRAWN	David 2021/11/09	
	圖號 DRAWING NO.	GN137-DW597	版本 REV.	C	核對 CHECKED	Josh 2021/11/09	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2021/11/09	
	公差 TOLERANCE	.X ± 0.30	單位 UNIT	mm	THIRD ANGLE PROJECTION		
		.XX ± 0.20					

	ECN NO.:220731 Revise the drawing	Alice	2022/08/09
	Add: B:Bag	David	2021/12/13
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE