


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		图面更新	CSX	04/14/06*
△		总长公式由N×5.0+2.0改为N/2×5.0+2.0	Yej	02/02/07*
△		增加UL刻字	CSX	07/01/07*
△		增加VDE刻字及参数	Zengy	12/08/08*

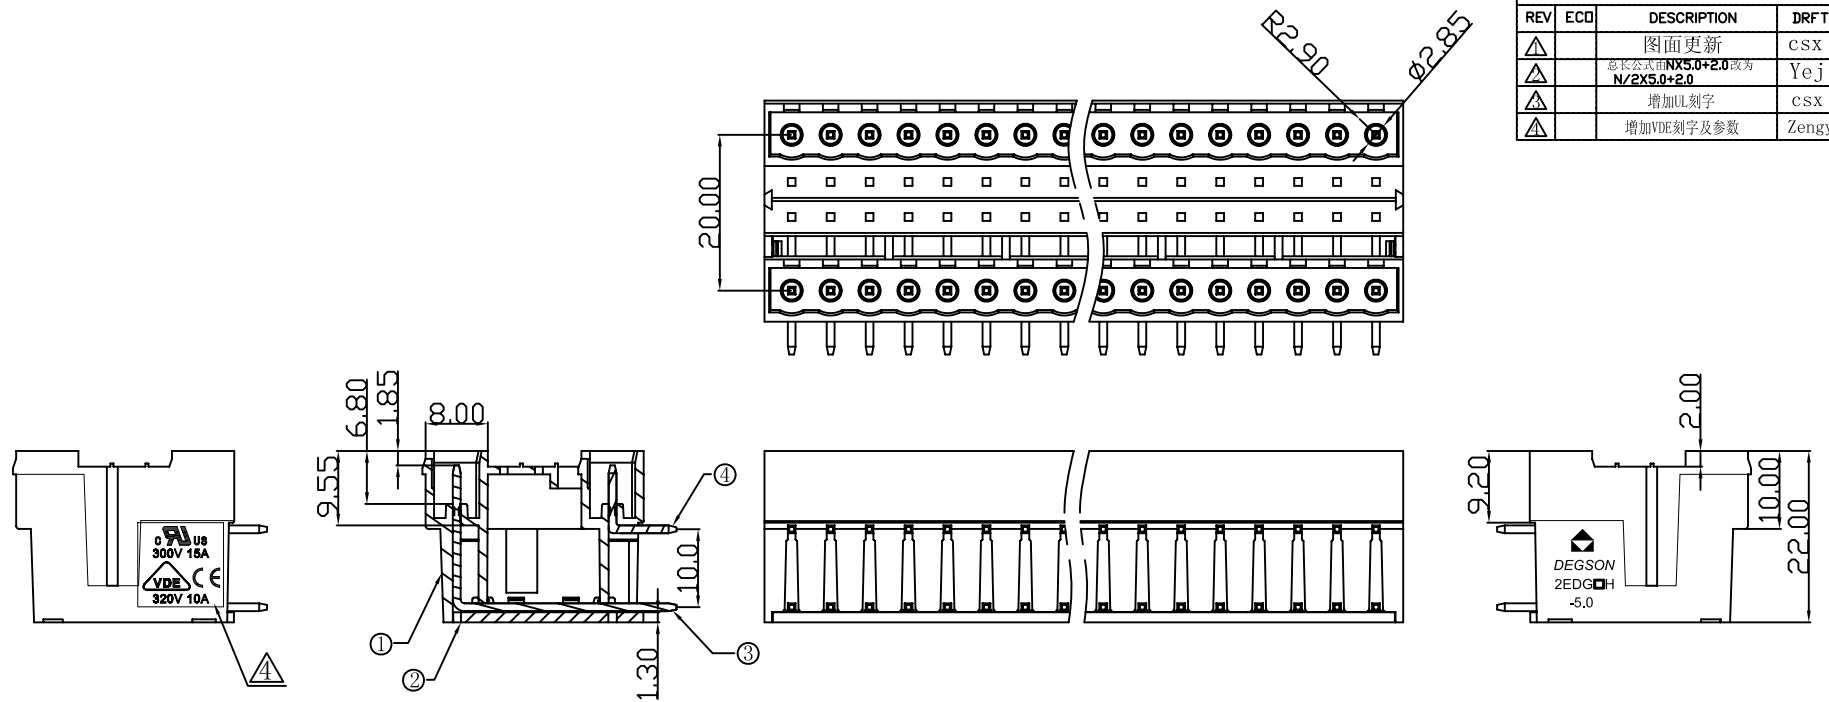

Notes:

1. Pitch:5.0mm , Poles:4-48P
2. Rated voltage/current:UL 300V/15A
VDE 320V/10A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ /DC1000V
6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to	over	over	to	over	over	over	to	
6	10	24	30	60	100	150	150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
							0.05/10	

4	2EDGRH Pin header(short)	1061B00030(H)	XX/2	Brass	SnCe
3	2EDGRH Pin header(long)	1061B00010(H)	XX/2	Brass	SnCe
2	2EDGRH-5.0 Cover	1061COYXXA(H)	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
1	2EDGRH-5.0 housing	1061AOYXXA(H)	1	PA66	UL94V-0B

TOLERANCES EXCEPT AS NOTED		DATE 05/30/05"	
MM	±	CHKD	DATE
MM	±	MFD	DATE
MM	±	APPVL	DATE
.0 ±			
.00 ±			
.000 ±			
MATERIAL :		G.E :	
ANGLES ± 1°		FINISH:	
THIRD ANGLE PROJECTION		SCALE : 1:1	

DEGSON ®		宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
NAME 2EDGRH-5.0-XXP-1Y-00A(H)			
DRAWING NO. 2EDGRH-5.0-E02		SIZE	REV
/PART NO.		A3	T4
DO NOT SCALE DRAWING		SHEET 1	OF 1