



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ Max.INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE:500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE:1000MΩ Min.
 - MECHANICAL CHARACTERISTICS:
 - DURABILITY: 300 CYCLES.
 - ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE:0°C~+85°C.
 - STORAGE TEMPERATURE:-20°C~+70°C.
 - PRODUCT NUMBER CODE:
 DS1036 - XX X X X X X
 RIVET TYPE
 P:W/ SCREW(UNC #4-40)
 N:W/O SEREW
 CONTACT PLATING
 O: SELECTIVE GOLD FLASH
 HOUSING COLOR
 U:BLUE
 B:BLACK
 STRAIN RELIEF
 P:W/
 N:W/O
 CONNECTOR TYPE
 M:MALE
 F:FEMALE
 No.OF CONTACTS
 09:9pos
 15:15pos
 25:25pos
 37:37pos

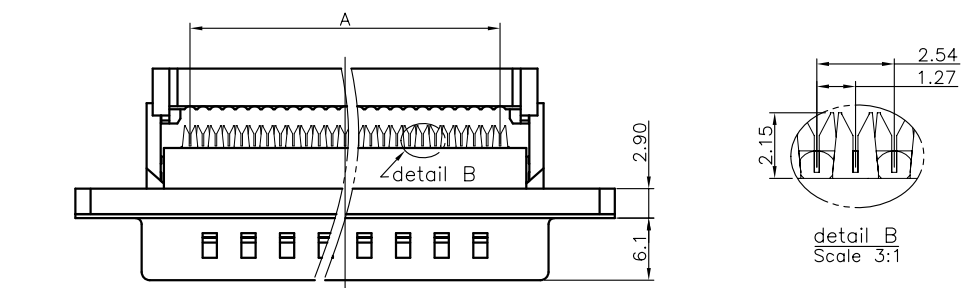


detail B
Scale 3:1

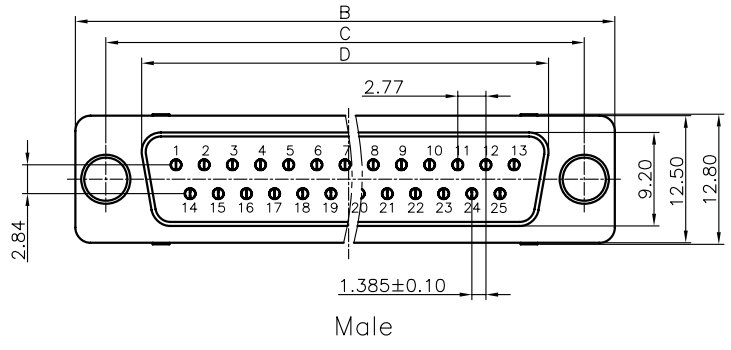


Male


Position	D±0.2			E±0.2	
	A±0.1	B±0.2	C±0.2	Male	Female
9P	10.16	30.80	24.99	17.90	16.33
15P	17.78	39.14	33.32	26.50	24.66
25P	30.48	53.04	47.04	40.00	38.38
37P	45.72	69.32	63.50	56.50	54.84

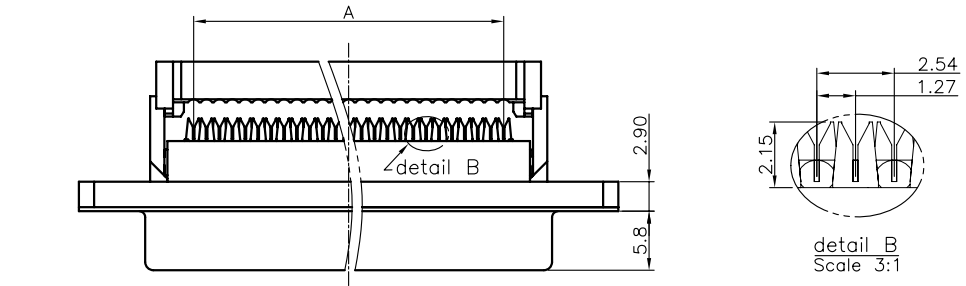

detail B
Scale 3:1

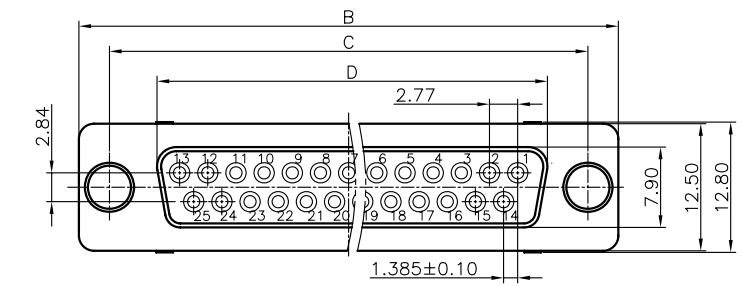

Female

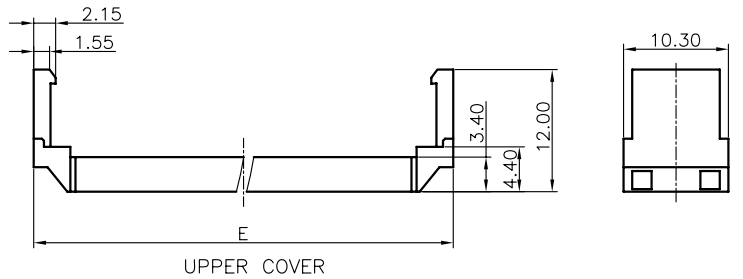

UPPER COVER

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±3°	mm	I.D.C D-SUB
.X	±0.38	.X	±2°	A4	SERIES DS1036 SERIES
.XX	±0.25	.XX	±1°	DI-15F, DI-15M, DI-25F, DI-25M, DI-37F, DI-37M, DI-9F, DI-9M	
DRAWING TYPE		CUSTOMER			
SCALE		1:1	SHEET 1 OF 1		
DRAWING NO.		C-DS1036-XXXXXXX			