
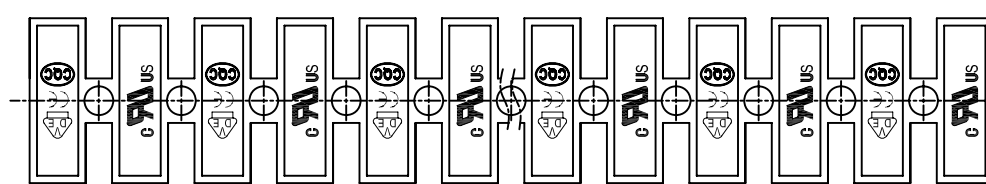
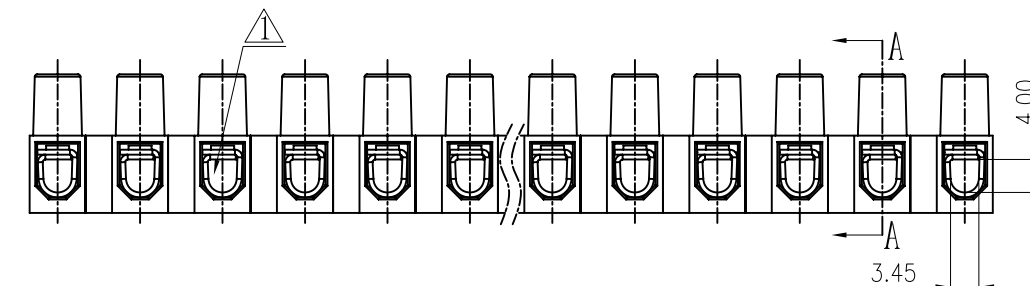


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		工程变更, 去掉挡线板	Zengy	07/21/08
△		品名中加上塑件底高"1.2"	Zengy	09/09/08
△		增加VDE线径刻字	Zengy	09/27/08
△		修改品名中"10A"为"100A"	LJH	11/01/08
△		增加参数及刻字	LJH	02/12/09

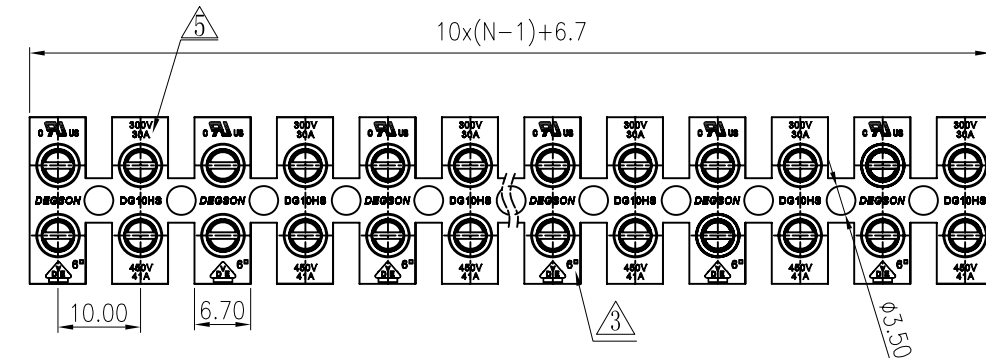

- Notes:
- Pitch:10.0, Poles:2-12P
  - Rated voltage/Current:UL 300V 30A △  
VDE 450V 41A
  - Operation temperatures:-40℃~+105℃
  - Withstanding Voltage:AC2000V/1Min
  - Insulation Resistance:5000MΩ/DC1000V
  - Wier Range:18-10AWG, 1-6mm<sup>2</sup>
  - Max. Torque Value:M3, 5.1kgf.cm
  - Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10	over 30	over 60	over 100	over 150	∩	
to 6	to 10	to 24	to 30	to 60	to 100	to 150	∇	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
							0.05/10	

3	DG10HS-Current carrier	X000002130 (H)	XX	Steel	Cr <sup>3+</sup> Zn
2	DG10HS"-Screw	S000003000 (H)	XX*2	Steel	Cr <sup>3+</sup> Zn
1	DG10HS-1.2- Housing	2023A0YXXA (H)	1	PA66	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
	MM (INCH)	DF TO LIN	DATE 02/22/08	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME: DG10HS-1.2-XXP-1Y-100A (H) DRAWING NO. DG10HS-E06 /PART NO.	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFD	DATE		
	APPVL	DATE			
	ANGLES ± 1°	G.E :		MATERIAL :	
	THIRD ANGLE PROJECTION	FINISH:		SCALE : 1:1	DD NDT SCALE DRAWING
				SHEET 1	OF 1