

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE



Notes:

1. Pitch:3.81mm , Poles:2-22P
2. Rated voltage/current:UL 300V/8A
VDE 250V/7A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:28~16AWG, 0.5-1.5mm²
7. Max. Torque

Pitch range in mm	Nominal dimension range in mm					—		
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150			
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1	0.05/0.10

Value:M2, 2.04kgf. cm(1.77Lb. in)

8. Undimensioned Tolerances:

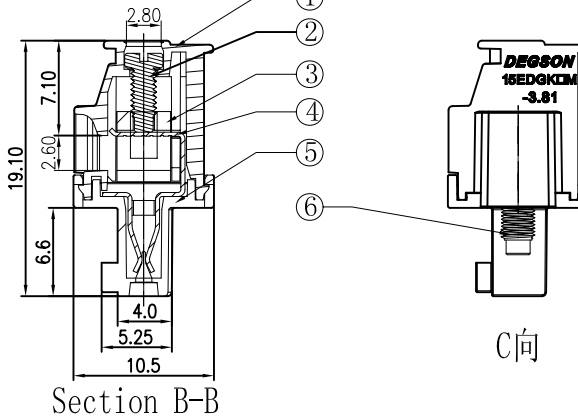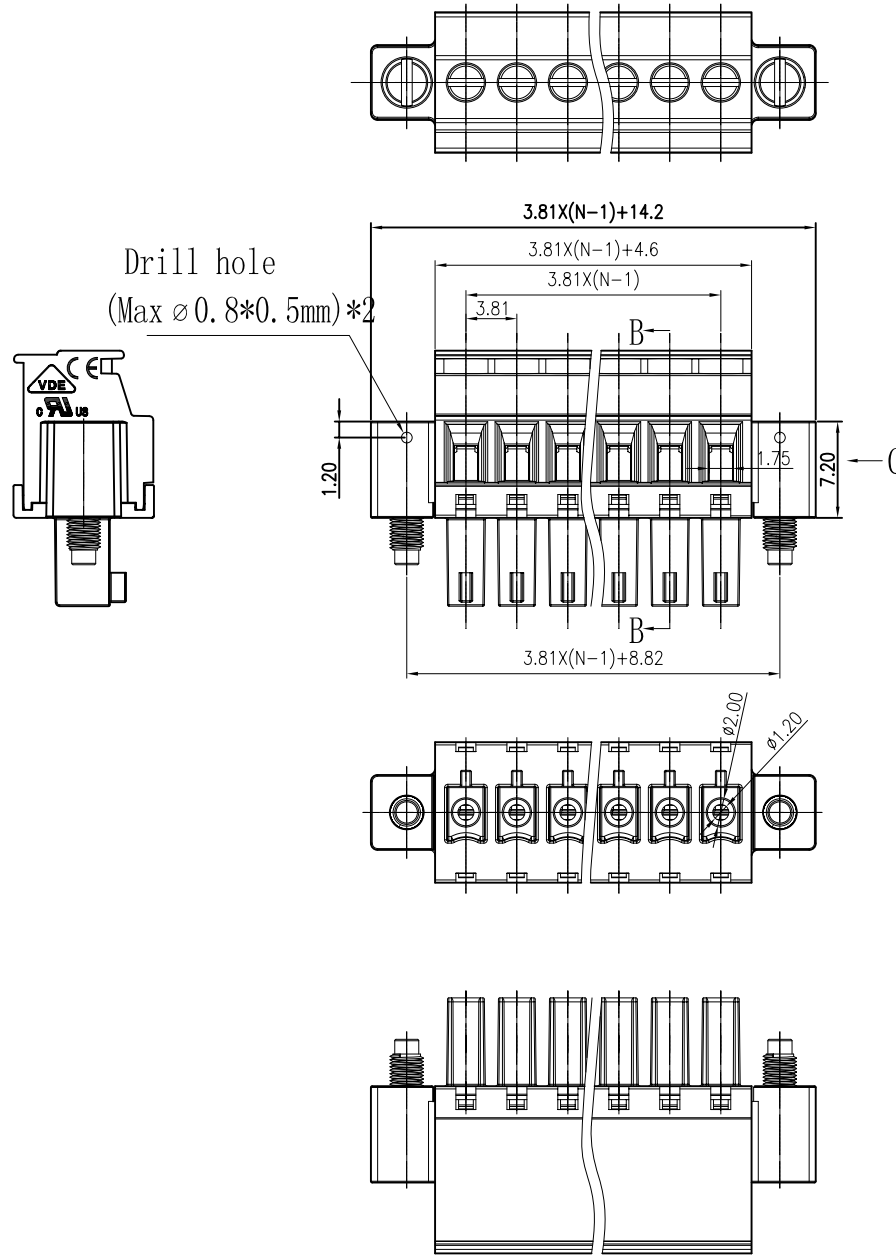

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
6	2EDG Screw-M2.5	S000001370 (H)	2	Steel	Cr ³⁺ Zn
5	15EDGKA/B-3.81-100A-Cover	1041COYXXE (H)	1	PA66	UL94V-0
4	15EDGKA/B-100A-Clamp	1033B00020 (H)	XX	Phosphor bronze	SnCe
3	15EDGK Cage	X000000010 (H)	XX	Brass	Ni Plated
2	15EDG Screw-M2.0	S000001360 (H)	XX	Steel	Cr ³⁺ Zn
1	15EDGKA/BM-3.81-100A-Housing	1047A0YXXE (H)	1	PA66	UL94V-0

DETACHED LISTS	MM (INCH)	DFTO Apple	DATE 04/11/09*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE			
		MFO	DATE			
		APPVL	DATE			
	MM	±		NAME 15EDGKAM-3.81-XXP-1Y-100A (H)		
	.0 ±	±				
	.00 ±	±				
	.000 ±	±				
	ANGLES ± 1°	G.E :		DRAWING NO. 15EDGKAM-3.81-E100	SIZE A3	REV TO 09/10/10*
	THIRD ANGLE PROJECTION	FINISH :		/PART NO.		
		SCALE : 1:1		DO NOT SCALE DRAWING	SHEET 1	OF 1