

SPECIFICATIONS


Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C to +105°C
 Contact Resistance: 10mΩ Max
 Withstanding Voltage: 1500V AC/minute
 Insulation resistance:1000mΩ Min

Material



Wafer: LCP,UL94V-0 Black
 Conductor: Brass

Ordering Information & Dimensions

ORDER INFORMATION

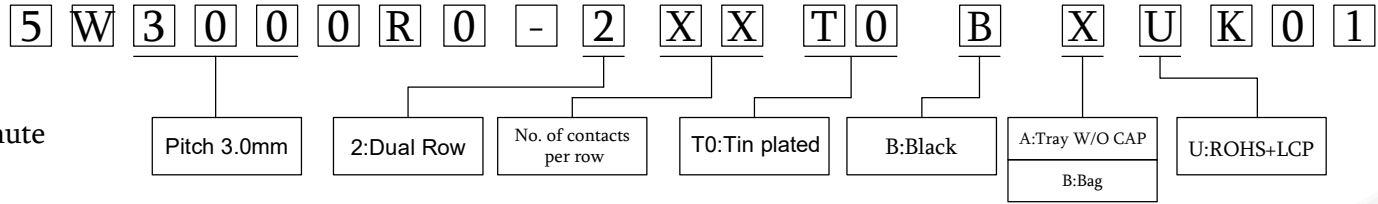

Poles	Dimensions (mm)		
	A	B	C
2*01	---	6.65	3.55
2*02	3.00	9.65	3.55
2*03	6.00	12.65	3.55
2*04	9.00	15.65	8.30
2*05	12.00	18.65	11.30
2*06	15.00	21.65	14.30
2*07	18.00	24.65	17.30
2*08	21.00	27.65	20.30
2*09	24.00	30.65	23.30
2*10	27.00	33.65	26.30
2*11	30.00	36.65	29.30
2*12	33.00	39.65	32.30

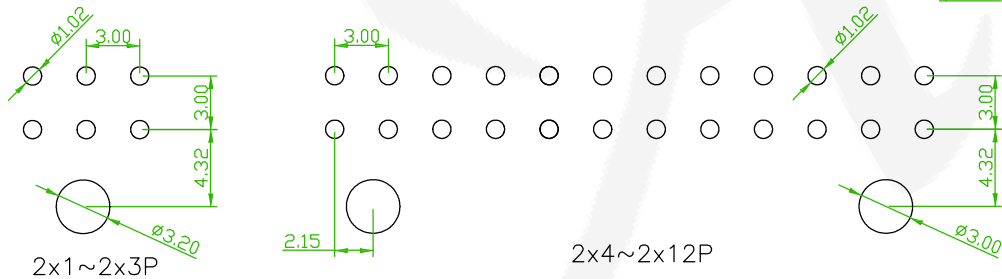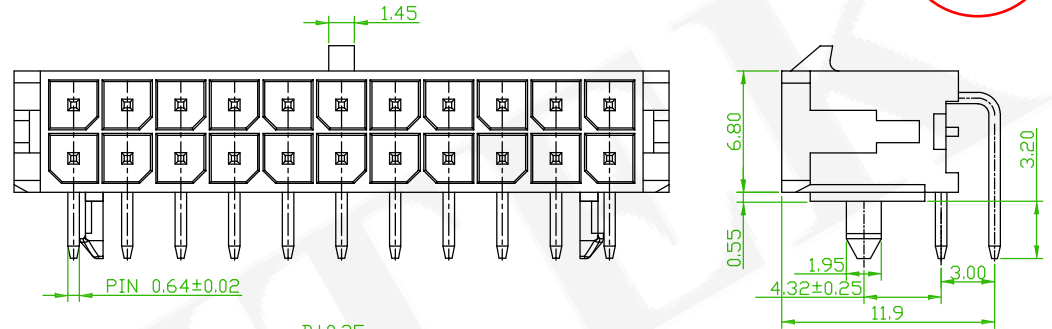

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

<p>糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	3.0mm WAFER FEMALE				頁數 Page	1/1
	品號 PART NO.	5W3000R0-2XXT0BXUK01			繪圖 DRAWN	Benson 2021/11/29	
	圖號 DRAWING NO.	GW097-BN826	版本 REV.	A	核對 CHECKED	Josh 2021/11/29	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2021/11/29	
	公差 TOLERANCE	.X ± 0.30	單位 UNIT	mm	THIRD ANGLE PROJECTION		
		.XX ± 0.20					

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE