


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加UL刻字	CSX	03/13/07
△		品名、料号增加环保标识“(H)”	YeJ	12/08/07

Notes:

1. Pitch:10mm , Poles:2-20P
2. Rated current:20A
3. Rated voltage:300V
4. Operation temperatures:-40° C~+105° C
5. Insulation Withstand Voltage:AC2000V/Min
6. Insulation Resistance:500MΩ/DC500V
7. Wire Range:22~14AWG
8. Max. Torque Value:12. 24kgf. cm
9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to		
6	6	10	10	30	60	100	150	∩
6	10	24	30	60	100	150		∇
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

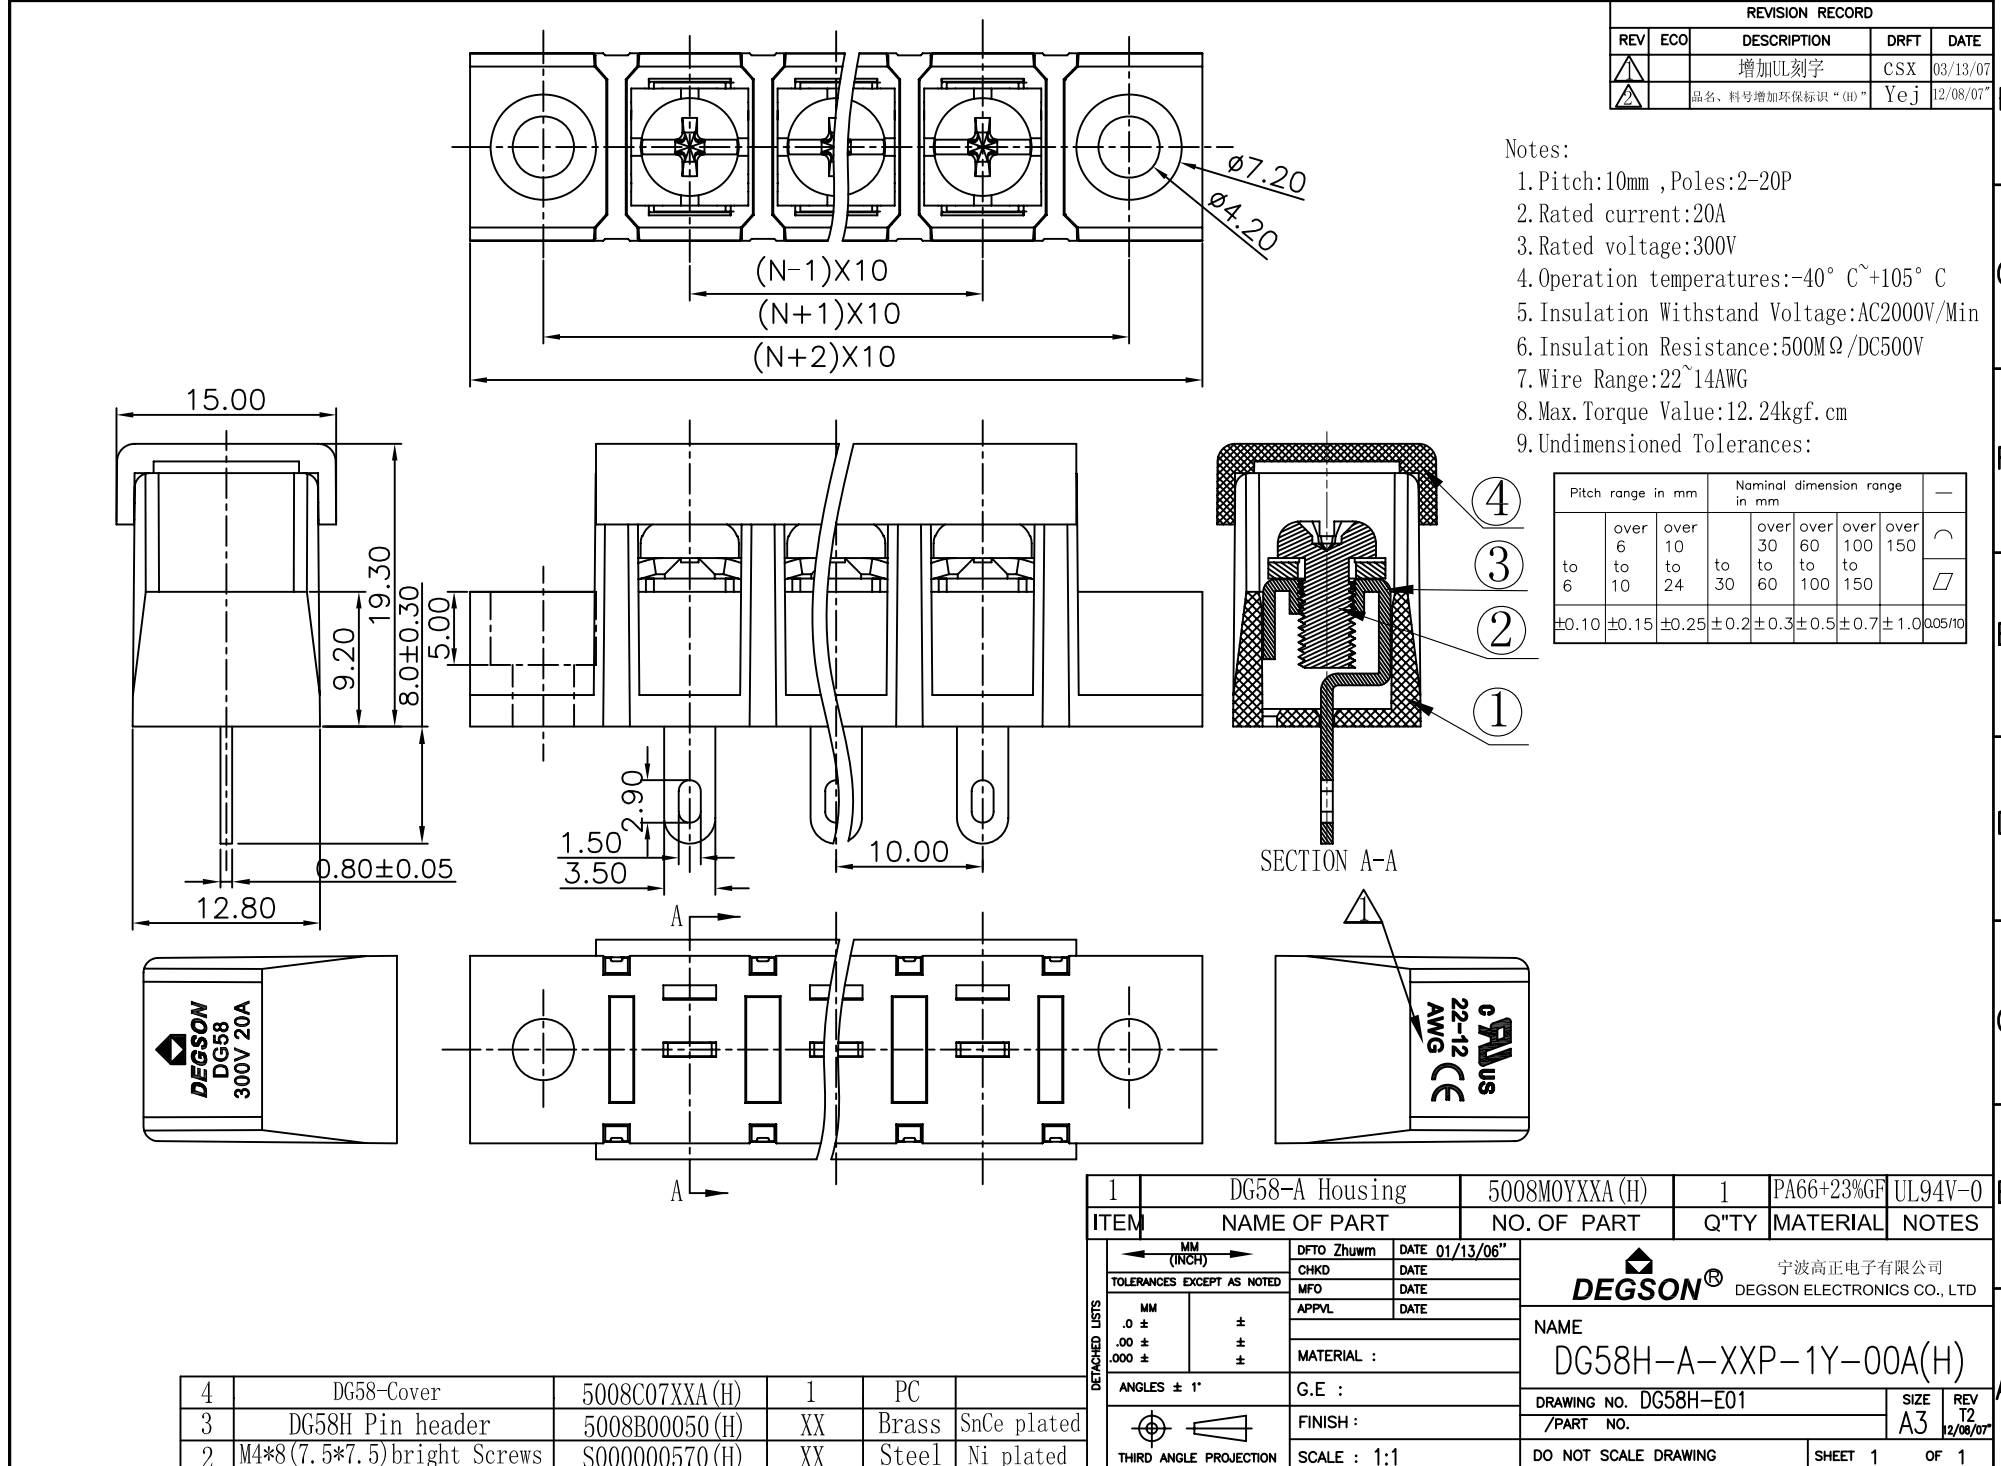

4	DG58-Cover	5008C07XXA (H)	1	PC	
3	DG58H Pin header	5008B00050 (H)	XX	Brass	SnCe plated
2	M4*8(7.5*7.5)bright Screws	S000000570 (H)	XX	Steel	Ni plated

1	DG58-A Housing	5008MOYXXA (H)	1	PA66+23%GF	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO Zhuwm DATE 01/13/06"		CHKD DATE	
MM (INCH)		MFO DATE		APPVL DATE	
.0 ±		±		MATERIAL :	
.00 ±		±		G.E :	
.000 ±		±		FINISH :	
ANGLES ± 1°		THIRD ANGLE PROJECTION		SCALE : 1:1	
NAME				DRAWING NO. DG58H-E01	
DEGSON® 宁波高正电子有限公司				SIZE A3	
DEGSON ELECTRONICS CO., LTD				REV T2	
NAME				/PART NO.	
DG58H-A-XXP-1Y-00A(H)				DO NOT SCALE DRAWING	
SHEET 1				OF 1	