


SPECIFICATIONS

Current Rating: 7A AC, DC
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Dielectric Voltage: 1500V AC for one minute
 Operation Temperature: -25°C to +85°C

MATERIAL







Insulator: Nylon 66, UL94V-0
 Contact Pin: Brass

ORDER INFORMATION

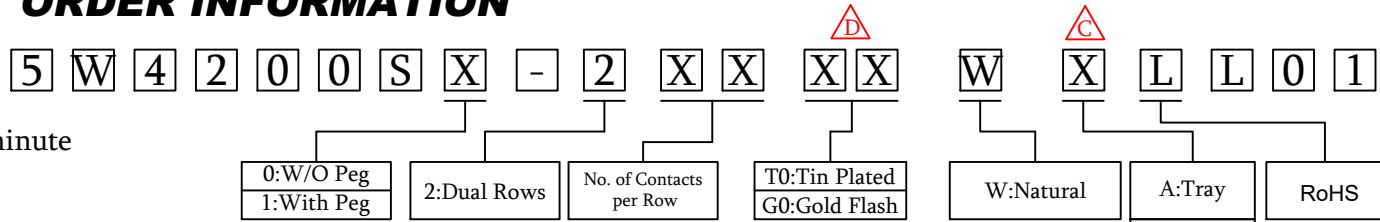

AMTEK 耀德
 2022.08.11
 Released DCC

No. of Contacts	Dimensions(mm)	
	A	B
2x1	-	5.60
2x2	4.20	9.80
2x3	8.40	14.00
2x4	12.60	18.20
2x5	16.80	22.40
2x6	21.00	26.60
2x7	25.20	30.80
2x8	29.40	35.00
2x9	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

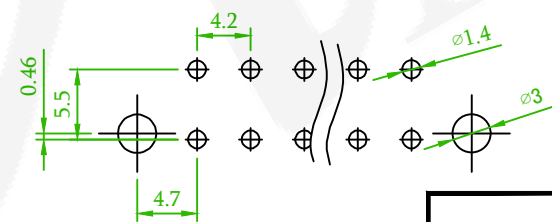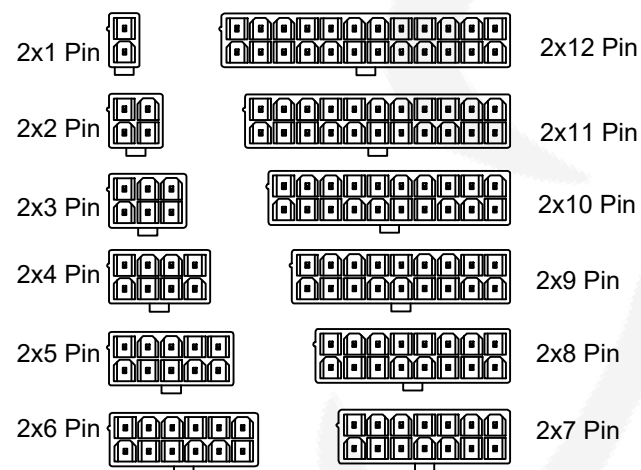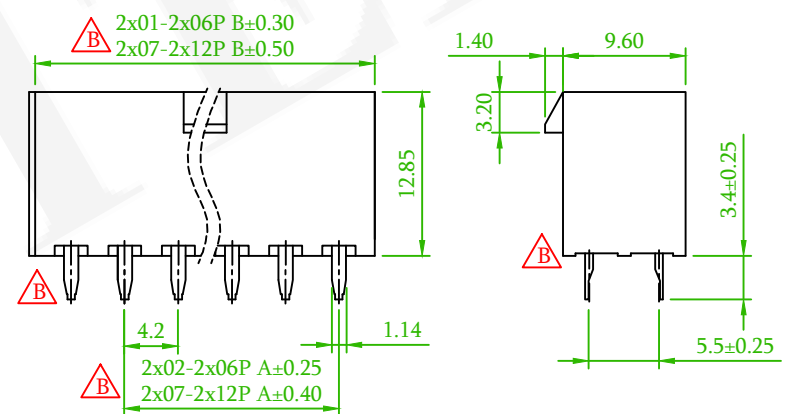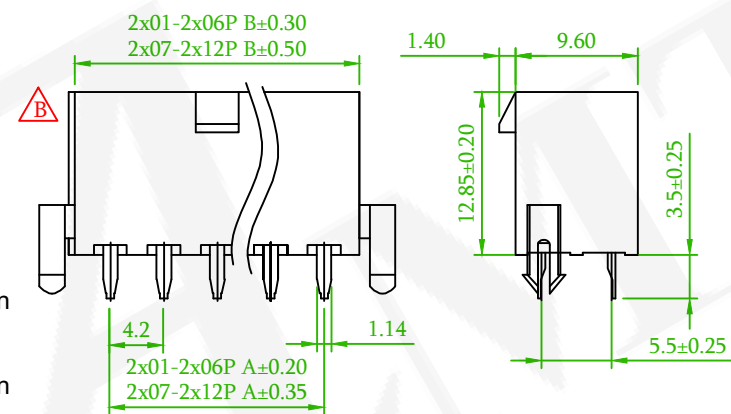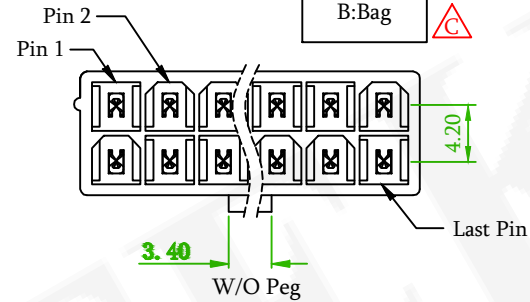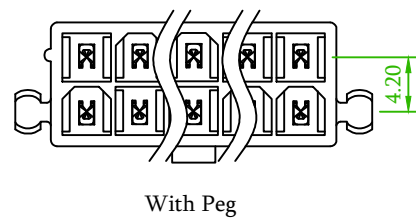

△x3	Add the G0 plated option	Alice	2022/8/11
△x3	Add the package option	Alice	2021/8/23
△x5	QEC NO.:210706 Revise the drawing	Alice	2021/7/27
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	4.2mm WAFER D/R V/T DIP TYPE				頁數 Page	1/1
品號 PART NO.	△D △C 5W4200SX-2XXXXWXLL01	繪圖 DRAWN	Gary			
圖號 DRAWING NO.	GN110-GB294	版本 REV.	D	核對 CHECKED	Josh	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason	
公差 TOLERANCE	.X ±0.30 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		