



## 5ET 微型保险丝管(延时型) SUB-MINIATURE FUSE-LINKS(TIME-LAG)

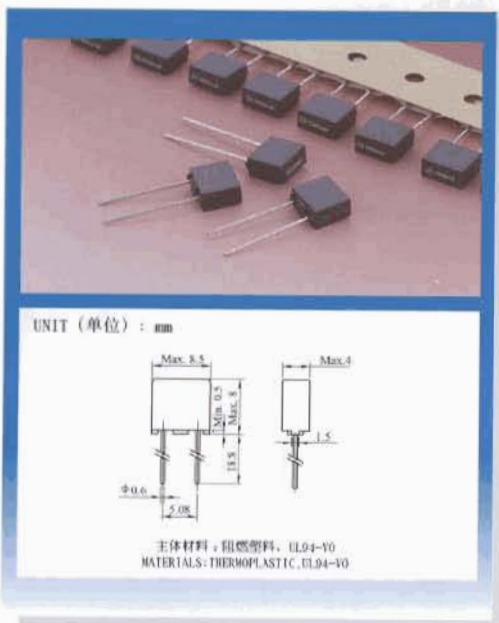

目录编号 CATALOG NO.	额定电流 AMPERE RATING	最大电压降 mv MAX VOLTAGE DROP	认证 APPROVALS					I <sup>2</sup> T 参考值 REFERENCE (A <sup>2</sup> S)
			CCC	SEMKO	VDE	UR	CSA	
0080H	80mA	400	○	○	○	○	○	0.01
0100H	100mA	350	○	○	○	○	○	0.02
0125H	125mA	300	○	○	○	○	○	0.04
0160H	160mA	280	○	○	○	○	○	0.08
0200H	200mA	260	○	○	○	○	○	0.12
0250H	250mA	240	○	○	○	○	○	0.40
0315H	315mA	220	○	○	○	○	○	0.61
0400H	400mA	200	○	○	○	○	○	1.03
0500H	500mA	190	○	○	○	○	○	1.62
0630H	630mA	180	○	○	○	○	○	2.48
0800H	800mA	160	○	○	○	○	○	3.65
010H	1A	140	○	○	○	○	●	6.07
013H	1.25A	130	○	○	○	○	○	10.06
016H	1.6A	120	○	○	○	○	○	16
020H	2A	100	○	○	○	○	○	23.6
025H	2.5A	100	○	○	○	○	○	38
032H	3.15A	100	○	○	○	○	○	60
040H	4A	100	○	○	○	○	○	95
050H	5A	100	○	○	○	○	○	152
063H	6.3A	100	○	○	○	○	○	248

H DENOTES FOR 250V (H表示250V)  
○ DENOTES FOR PENDING (○表示申请中)  
● DENOTES FOR APPROVED (●表示已取得认证)

I-T CHARACTERISTICS CURVE  
电流-时间曲线图

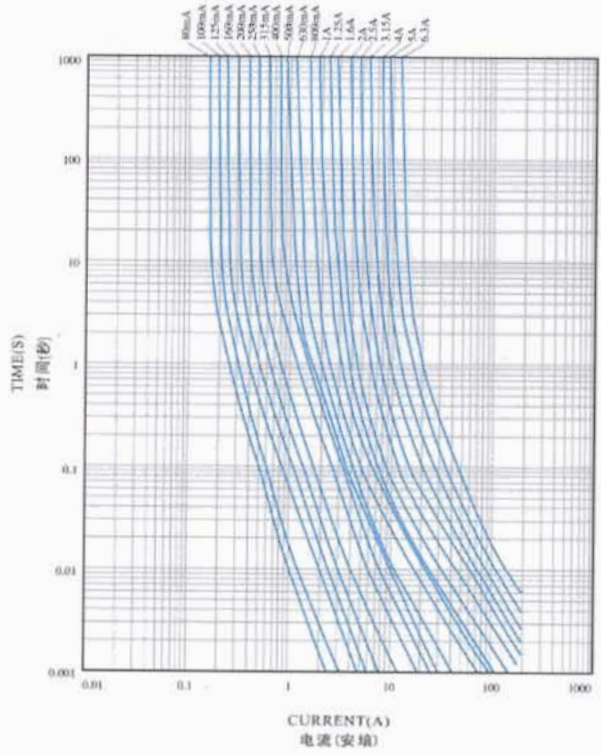

分断电流:  
BREAKING CAPACITY:  
CCC/SEMKO/VDE: 35A OR 10In WHICHEVER IS GREATER  
UR/CSA/PSE: 100A 250V AC

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME
2.1In	Max (最慢)	2min
2.75In	Min (最快)	400ms
	Max (最慢)	10sec
4In	Min (最快)	150ms
	Max (最慢)	3sec
10In	Min (最快)	20ms
	Max (最慢)	150ms