

Kingtronics®

GKT-GT

Aluminum Electrolytic Capacitor – Radial

FEATURES


- ◆ Wide temperature range, long life: 105°C 2000 hours.
- ◆ Miniature and large capacity



SPECIFICATIONS

OPERATING TEMPERATURE RANGE (°C)	-40°C ~ +105°C		-25°C ~ +105°C									
Rated Voltage Range (V)	6.3V ~ 100V		160V ~ 450V									
Capacitance Range	0.1μF~22000μF		0.47μF~470μF									
CAPACITANCE TOLERANCE (20°C, 120Hz)	±20%											
LEAKAGE CURRENT (+20°C, max)	≤0.01CV or 3μA (after 2 minutes, whichever is greater)		≤0.03CV(μA)+40μA (after 2 minutes)									
DISSIPATION FACTOR (+20°C, 120Hz)	U _R (V)	6.3	10	16	25	35	50	63	100	160~250	350~400	450
	Tan δ(Max.)	0.22	0.17	0.15	0.14	0.12	0.10	0.09	0.08	0.12	0.15	0.17
When nominal capacitance exceeds 1000μF, add 0.02 to the value above for each 1000μF increase.												
Temperature Characteristics (Impedance ratio at 120Hz)	U _R (V)	6.3	10	16	25~100	160	200	250	350	400	450	
	Z-25°C/Z+20°C	4	3	2	2	2	2	3	5	6	6	
	Z-40°C/Z+20°C	8	6	4	3	2	2	3	5	6	6	
LOAD LIFE	After applying rated voltage with specified ripple current for 2000 hours at +105°C and then resumed 24 hours: Capacitance change: ±20% of the initial measured value Leakage current: ≤the initial specified value Dissipation factor: ≤200% of the initial specified value											
SHELF LIFE	After storage for 1000 hours at +105°C, U _R to be applied for 30 minutes and then resumed 24 hours: Capacitance change: ±20% of the initial measured value Leakage current: ≤the initial specified value Dissipation factor: ≤200% of the initial specified value											

DIMENSIONS (mm)

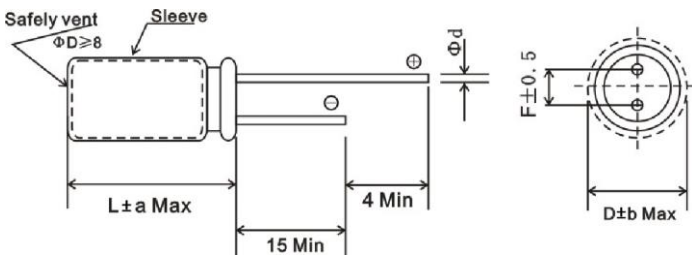

ΦD	5	6.3	8	10	12.5/13	16~18	22
F	2.0	2.5	3.5	5.0		7.5	10
Φd ±0.05	0.5	L<20	L≥20	0.6		0.8	
		0.5	0.5				

a Max.	D<18	D=18		D>18
		L<35.5	L≥35.5	
	+1.5 -1.0	+1.5 -1.0	+2.0 -1.0	+2.0 -1.0

b Max.	(D<18)	0.5
	(D≥18)	1.0

MULTIPLIER FOR RIPPLE CURRENT

Frequency Coefficient							
Cap(μF)	Frequency (Hz)	50 (60)	120	400	1K	10K	50K~100K
	CAP ≤10		0.8	1	1.30	1.45	1.65
10<CAP≤100		0.8	1	1.23	1.36	1.48	1.53
100<CAP≤1000		0.8	1	1.16	1.25	1.35	1.38
1000<CAP		0.8	1	1.11	1.17	1.25	1.28

Temperature Coefficient			
Temperature(°C)	+70	+85	+105
Coefficient	1.96	1.68	1.0

Kingtronics® International Company

Kingtronics®

GKT-GT

Aluminum Electrolytic Capacitor – Radial

STANDARD RATINGS

Ripple Current: 105°C, 120Hz

WV µF	6.3		10		16		25		35		50		63		100	
	Size (mm)	Ripple Current mArms	Size (mm)	Ripple Current mArms	Size (mm)	Ripple Current mArms	Size (mm)	Ripple Current mArms	Size (mm)	Ripple Current mArms	Size (mm)	Ripple Current mArms	Size (mm)	Ripple Current mArms	Size (mm)	Ripple Current mArms
	ØDxL		ØDxL		ØDxL		ØDxL		ØDxL		ØDxL		ØDxL		ØDxL	
0.1-0.47	--	--	--	--	--	--	--	--	--	--	5x11	3	5x11	3	5x11	3
1	--	--	--	--	--	--	--	--	--	--	5x11	9	5x11	9	5x11	9
2.2	--	--	--	--	--	--	5x11	11	--	--	5x11	11	5x11	11	5x11	15
3.3	--	--	--	--	--	--	5x11	15	--	--	5x11	15	5x11	15	5x11	18
4.7	--	--	--	--	--	--	5x11	18	--	--	5x11	18	5x11	20	5x11	20
6.8	--	--	--	--	--	--	--	--	--	--	5x11	20	5x11	25	5x11	25
10	--	--	5x11	20	5x11	20	5x11	25	5x11	25	5x11	25	5x11	30	6.3x12	35
22	--	--	5x11	20	5x11	30	5x11	35	5x11	35	5x11	40	6.3x11	50	6.3x12	65
33	--	--	5x11	20	5x11	40	5x11	40	5x11	50	5x12	50	6.3x11	60	8x12	85
47	--	--	5x11	45	5x11	50	5x11	50	6.3x11	65	6.3x11	70	6.3x12	90	10x12.5	120
68	--	--	5x11	60	--	--	--	--	--	--	--	--	--	--	10x16	180
100	--	--	5x11	180	5x11 6x11	70 80	6.3x11	90	6.3x12	102	8x12	120	10x12	150	10x20	220
120	--	--	--	--	--	--	6.3x11	100	8x12	120	8x16	140	10x16	180	10x20	250
150	--	--	--	--	--	--	6.3x11	110	8x12	140	10x12	160	10x16	210	13x20	280
180	--	--	--	--	--	--	8x12	135	8x12	165	10x12	190	10x16	230	13x20	310
220	5x11	75	5x11 6.3x11	110 130	6.3x11	95	8x12	150	8x12	180	10x17	240	10x17	270	13x25	380
330	6.3x12	100	6.3x11	110	8x12	180	8x12	170	8x16	200	10x17	320	13x20	380	16x25	510
470	6.3x12	130	6.3x12 8x12	120 190	8x12	210	8x16 10x12	190 250	10x17	310	13x20	430	13x25	500	16x25	680
560	--	--	8x12 10x12	200 220	--	--	--	--	10x20	400	13x20	600	13x25	600	16x35	750
680	--	--	8x16	320	--	--	10x16	380	10x20	450	13x25	720	16x25	700	16x35	850
820	--	--	10x12	350	--	--	--	--	13x20	500	13x25	750	16x25	800	18x35	1000
1000	8x14	300	8x14	400	10x17	440	10x21	500	13x20	580	13x25	790	16x30	900	18x40	1200
1200	--	--	--	--	--	--	--	--	13x20	700	16x25	850	16x35	1100	--	--
1500	--	--	10x16	520	--	--	13x20	600	13x25	860	16x30	980	18x35	1210	--	--
1800	--	--	--	--	--	--	--	--	16x25	900	16x35	1150	--	--	--	--
2200	10x20	540	10x20	600	10x20 13x20	600 700	13x25	800	16x25	937	16x35	1230	18x35	1310	--	--
2700	--	--	--	--	--	--	16x25	900	--	--	18x35	1320	--	--	--	--
3300	13x20	670	13x20	800	13x25	920	16x25	1000	16x30	1080	18x40	1400	--	--	--	--
3900	--	--	13x20	900	--	--	--	--	--	--	--	--	--	--	--	--
4700	13x20	900	13x25	1000	16x25	1050	16x35	1380	18x40	1540	--	--	--	--	--	--
6800	13x25	1020	16x25	1200	16x35	1430	18x35	1630	--	--	--	--	--	--	--	--
8200	--	--	16x30	1450	--	--	18x35	2000	--	--	--	--	--	--	--	--
10000	16x25	1220	16x35	1600	18x35	1700	--	--	--	--	--	--	--	--	--	--
12000	--	--	16x35	1650	--	--	--	--	--	--	--	--	--	--	--	--
15000	16x35	1300	18x35	1700	--	--	--	--	--	--	--	--	--	--	--	--
22000	18x40	1400	--	--	--	--	--	--	--	--	--	--	--	--	--	--

WV µF	160		200		250		350		400		450	
	Size (mm)	Ripple Current mArms	Size (mm)	Ripple Current mArms	Size (mm)	Ripple Current mArms	Size (mm)	Ripple Current mArms	Size (mm)	Ripple Current mArms	Size (mm)	Ripple Current mArms
	ØDxL		ØDxL		ØDxL		ØDxL		ØDxL		ØDxL	
1	6.3x11	14	--	--	6.3x12	9	6.3x11	15	8x12	19	6.3x11	12
2.2	6.3x11	15	6.3x11	15	6.3x11	15	6.3x11	20	8x12	30	8x12	24
3.3	6.3x11	20	8x11	20	8x11	35	8x11	30	8x12	35	8x12	38
4.7	6.3x11	45	8x12	40	8x12	40	8x12	35	8x12	42	10x12	42
6.8	--	--	--	--	8x12	50	10x12	45	10x13	58	10x20	58
10	8x12	65	10x12	70	10x17	70	10x20	75	10x16	78	10x20	80
22	10x12	110	10x16	110	10x17	120	13x20	130	13x20	140	13x20	150
33	10x16	150	10x16	135	13x20	170	13x25	190	13x20	210	13x25 16x20	198 230
47	--	--	--	--	13x25	225	16x25	300	16x20	390	16x25	400
56	--	--	--	--	13x25	270	16x25	340	--	--	16x30	320
68	13x20	260	13x25	250	13x25	295	16x30	370	16x25	420	18x26	366
82	--	--	--	--	16x25	310	16x35	410	18x30	450	18x30	440
100	13x25	350	13x25	310	16x25	340	18x30	450	18x31	490	18x40	490
120	--	--	--	--	--	--	--	--	18x32	530	18x40	540

Kingtronics® International Company

Website: www.kingtronics.com Email: info@kingtronics.com Tel: (852) 8106 7033 Fax: (852) 8106 7099

Kingtronics®

GKT-GT

Aluminum Electrolytic Capacitor – Radial

Higher Ripple Current

Ripple Current: 105°C, 120Hz

WV µF	6.3		10		16		25		35		50		63		100	
	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current
	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms
0.1-0.47	--	--	--	--	--	--	--	--	--	--	5x11	8	5x11	8	5x11	14
1	--	--	--	--	--	--	--	--	--	--	5x11	11	5x11	13	5x11	19
2.2	--	--	--	--	--	--	5x11	16	--	--	5x11	20	5x11	15	5x11	30
3.3	--	--	--	--	--	--	5x11	25	--	--	5x11	30	5x11	19	5x11	32
4.7	--	--	--	--	--	--	5x11	28	--	--	5x11	33	5x11	22	5x11	38
6.8	--	--	--	--	--	--	--	--	--	--	5x11	42	5x11	34	5x11	52
10	--	--	5x11	40	5x11	50	5x11	38	5x11	41	5x11	50	5x11	50	6.3x12	73
22	--	--	5x11	50	5x11	54	5x11	57	5x11	61	5x11	78	6.3x11	86	6.3x12	104
33	--	--	5x11	60	5x11	64	5x11	69	5x11	75	5x12	95	6.3x11	100	8x12	150
47	--	--	5x11	71	5x11	80	5x11	106	6.3x11	110	6.3x11	125	6.3x12	130	10x12.5	190
68	--	--	5x11	83	--	--	--	--	--	--	--	--	--	--	10x16	239
100	--	--	--	--	5x11 6x11	120 135	6.3x11	145	6.3x12	150	8x12	188	10x12	200	10x20	320
120	--	--	--	--	--	--	6.3x11	150	8x12	180	8x16	225	10x16	275	10x20	430
150	--	--	--	--	--	--	6.3x11	155	8x12	205	10x12	268	10x16	308	13x20	455
180	--	--	--	--	--	--	8x12	202	8x12	218	10x12	294	10x16	342	13x20	492
220	5x11	150	5x11 6.3x11	155 175	6.3x11	190	8x12	236	8x12	270	10x17	370	10x17	440	13x25	450
330	6.3x12	170	6.3x11	200	8x12	270	8x12	310	8x16	455	10x17	420	13x20	560	16x25	580
470	6.3x12	230	6.3x12 8x12	260 290	8x12	310	8x16 10x12	350 380	10x17	520	13x20	630	13x25	700	16x25	780
560	--	--	8x12 10x12	314 365	--	--	--	--	10x20	513	13x20	690	13x25	726	16x35	835
680	--	--	8x16	390	--	--	10x16	520	10x20	590	-	-	16x25	800	16x35	1021
820	--	--	10x12	410	--	--	--	--	13x20	565	13x25	760	16x25	820	18x35	1155
1000	8x14	355	8x14	415	10x17	645	10x21	775	13x20	810	13x25	950	16x30	915	18x40	1344
1200	--	--	--	--	--	--	--	--	13x20	815	16x25	890	16x35	1175	--	--
1500	--	--	10x16	549	--	--	13x20	715	13x25	895	16x30	1035	18x35	1410	--	--
1800	--	--	--	--	--	--	--	--	16x25	945	16x35	1210	--	--	--	--
2200	10x20	615	10x20	760	10x20 13x20	735 760	13x25	1110	16x25	1260	16x35	1470	18x35	2180	--	--
2700	--	--	--	--	--	--	16x25	955	--	--	18x35	1485	--	--	--	--
3300	13x20	920	13x20	885	13x25	1170	16x25	1440	16x30	1420	18x40	1750	--	--	--	--
3900	--	--	13x20	980	--	--	--	--	--	--	--	--	--	--	--	--
4700	13x20	1025	13x25	1280	16x25	1320	16x35	1680	18x40	1650	--	--	--	--	--	--
6800	13x25	1185	16x25	1310	16x35	1930	18x35	2160	--	--	--	--	--	--	--	--
8200	--	--	16x30	1530	--	--	18x35	2240	--	--	--	--	--	--	--	--
10000	16x25	1335	16x35	2220	18x35	2350	--	--	--	--	--	--	--	--	--	--
12000	--	--	16x35	2250	--	--	--	--	--	--	--	--	--	--	--	--
15000	16x35	1856	18x35	2485	--	--	--	--	--	--	--	--	--	--	--	--
22000	18x40	1765	--	--	--	--	--	--	--	--	--	--	--	--	--	--

WV µF	160		200		250		350		400		450	
	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current	Size (mm)	Ripple Current
	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms	ØDxL	mArms
1	6.3x11	17	--	--	6.3x12	16	6.3x11	16	8x12	21	6.3x11	22
2.2	6.3x11	23	6.3x11	30	6.3x11	35	6.3x11	28	8x12	39	8x12	39
3.3	6.3x11	34	8x11	40	8x11	42	8x11	43	8x12	45	8x12	45
4.7	--	--	8x12	46	8x12	45	8x12	50	8x12	50	10x12	55
6.8	--	--	--	--	8x12	52	10x12	56	10x13	72	10x20	73
10	--	--	--	--	10x17	116	10x20	88	10x16	95	10x20	98
22	10x12	118	10x16	140	10x17	140	13x20	220	13x20	160	13x20	191
33	10x16	155	10x16	155	13x20	190	13x25	215	13x20	216	--	--
47	10x20	198	13x20	220	13x25	250	--	--	16x20	415	--	--
56	--	--	--	--	13x25	305	16x25	380	--	--	16x30	355
68	13x20	275	13x25	270	13x25	322	--	--	16x25	445	18x26	404
82	--	--	--	--	16x25	355	16x35	450	18x30	485	18x30	515
100	13x25	355	13x25	328	16x25	395	18x30	505	18x31	500	18x40	560
120	--	--	--	--	--	--	--	--	18x32	545	18x40	560

Kingtronics® International Company

Kingtronics®**GKT-GT**

Aluminum Electrolytic Capacitor – Radial

HOW TO ORDER

GKT	GT	0J	0R1	M	00500110	020	000	B	R	RC
Series	Sub Series	Rated Voltage	Capacitance	Capacitance Tolerance	Dimension	Pitch /Pins	Lead Length	Packing	Pb	Ripple Current
		1.	2.	3.	4.	5.	6.	7.	8.	9.

NOTE:**1. Rated Voltage**

Code	0J	1A	1C	1D	1E	1V	1G	1H	1J	1K
Voltage	6.3V	10V	16V	20V	25V	35V	40V	50V	63V	80V

Code	2A	2B	2C	2K	2D	2E	2F	2U	2V	2G	2X	2W	2H	2Y
Voltage	100V	120V	160V	180V	200V	250V	315V	330V	350V	400V	420V	450V	500V	550V

2. Capacitance

Code	0R1	R22	R33	R47	010	2R2	3R3	4R7	100	220	330	470	101
Capacitance (μF)	0.1	0.22	0.33	0.47	1	2.2	3.3	4.7	10	22	33	47	100

Code	221	271	331	391	471	561	681	102	222	332	472	103	223
Capacitance (μF)	220	270	330	390	470	560	680	1000	2200	3300	4700	10000	22000

3. Capacitance Tolerance

Code	K	L	M	P	Q	R	T	U	V	H	F
Tolerance	±10%	±15%	±20%	+100-0%	+30-10%	+20-0%	+50-10%	+75-10%	+20-10%	+20-5%	+30-0

4. Dimension

Code	00500110	00630120	01300200	01600300	03500450
Dimension (mm)	5x11	6.3x12	13x20	16x30	35x45

5. Pitch/Pins

Code	020	025	035	050	075	100	127	4pins
Pitch (mm)/ Pins	2.0	2.5	3.5	5.0	7.5	10.0	12.7	4PS

6. Lead Length

Code	000	040	045	050
Lead Length	Standard	4.0	4.5	5.0

7. Packing

Code	A	B
Packing	Ammo	Bulk

8. Pb

Code	L	R
Pb	Leaded	RoHS

9.. Ripple Current

Code	-	RC
Ripple Current	Standard	Higher Ripple Current

Note: Specifications are subject to change without notice.

Kingtronics® International Company