





- Notes:
- 1. Pitch:7.5mm , Poles:1-XXP
  - 2. Rated voltage/current:UL 300V/12A  
VDE 250V/24A
  - 3. Operation temperatures:-40℃~+105℃
  - 4. Withstanding Voltage:AC2000V/1Min
  - 5. Insulation Resistance:5000MΩ/DC1000V
  - 6. Wire Range:24~14AWG, 0.5~2.5mm<sup>2</sup>
  - 7. Max. Torque Value:M2.5 , 4.08Kgf.cm
  - 8. Undimensioned Tolerances:

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△	10-0165	增加UL刻字	Lasting	07/15/10*

Pitch range in mm		Nominal dimension range in mm		—	
to 6	over 6 to 10	to 24	over 30 to 60	over 60 to 100	over 100 to 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5
±0.7	±1.0	±0.5	±0.7	±1.0	±0.5

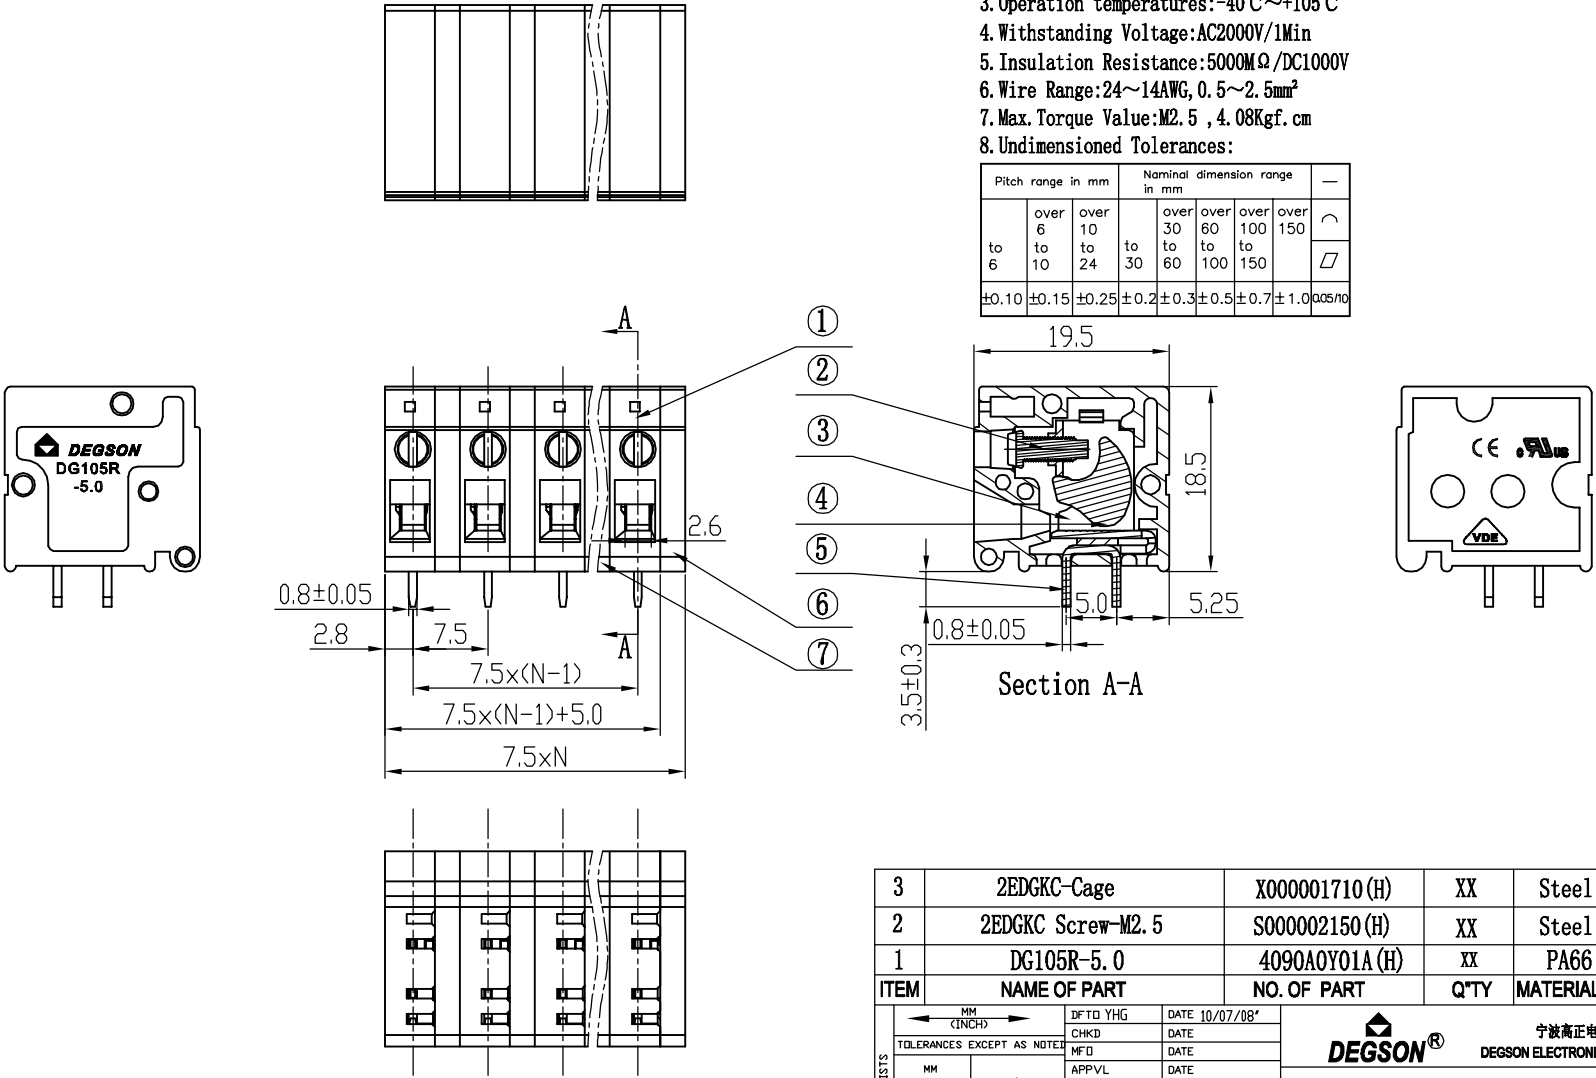

7	DG105R-Calpboard	4090HOY01A (H)	XX-1	PA66	UL94V-0
6	DG105R-Cover	4090COY01A (H)	1	PA66	UL94V-0
5	DG105R-5.0-Pin header	4090BO0010 (H)	XX	Copper	SnCe plated
4	2EDGKC-Block	X000001720 (H)	XX	Steel	Cr <sup>3+</sup> Zn

3	2EDGKC-Cage	X000001710 (H)	XX	Steel	Cr <sup>3+</sup> Zn
2	2EDGKC Screw-M2.5	S000002150 (H)	XX	Steel	Cr <sup>3+</sup> Zn
1	DG105R-5.0	4090A0Y01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS	 MM (INCH)		DFTO YHG		DATE 10/07/08*
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE
			MFD		DATE
			APPVL		DATE
			MATERIAL :		
	ANGLES ± 1°		G.E :		
			FINISH:		
	THIRD ANGLE PROJECTION		SCALE : 1:1		
				宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	NAME			DG105R-7.5-XXP-1Y-00A (H)	
DRAWING NO. DG105R-7.5-E01				SIZE	REV
/PART NO.				A3	T1
DO NOT SCALE DRAWING				07/15/10*	
SHEET 1				OF 1	