

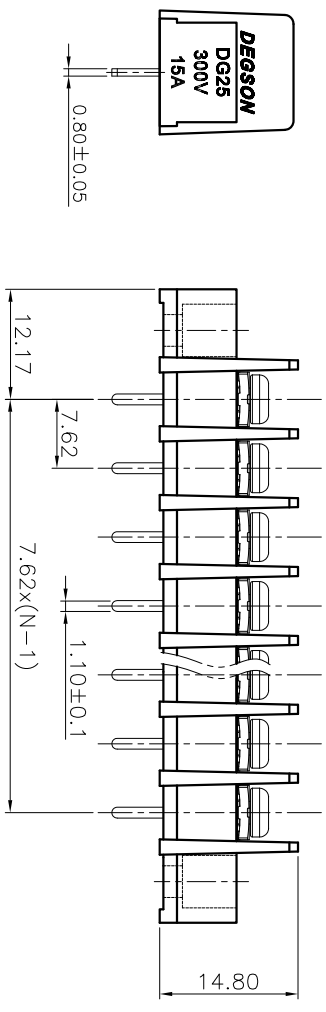


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE


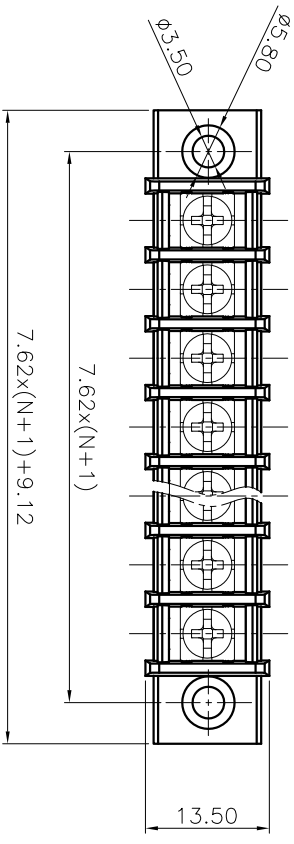


- NOTES1:
UL Standard
1. Rated voltage/current : 300V / 15A
2. Torque value : M3 , 4.43Lb.in
3. Wire range : 22~14AWG

- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 7.62mm, Poles : N=02~24P
3. Withstanding voltage : AC1600V/1Min
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range	In mm		Nominal dimension range		Tolerance
	Over	TO	Over	Over	
6	10	TO	30	60	0.1/0
10	TO	TO	TO	100	150
10	24	TO	30	60	150
10	TO	TO	TO	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
±1.00	±1.30	±2			

6. RoHS Compliance

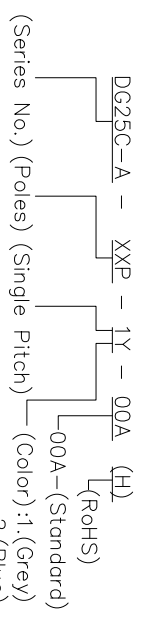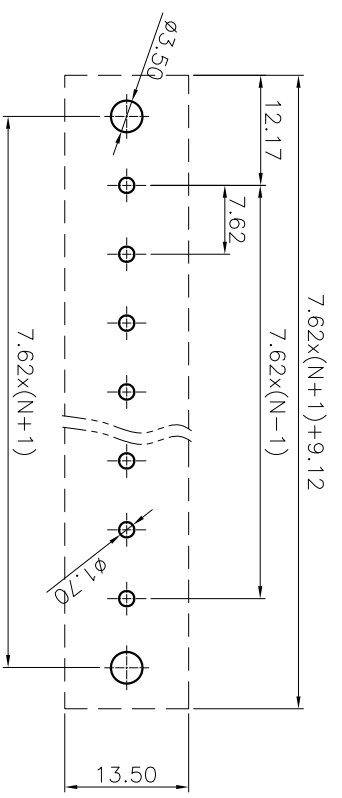

- (Series No.) (Poles) (Single Pitch) (Color) :1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO.,LTD
APPD:	/	TITLE:	DG25C-A-XXP-1Y-00A(H)
CHKD:	/	CUSTOMER DRAWING	REV DO
DRFT:	/	DRAWING NO.:	SHEET 1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE 1:1

A B C D E F G H

8 7 6 5 4 3 2 1

A B C D E F G H