
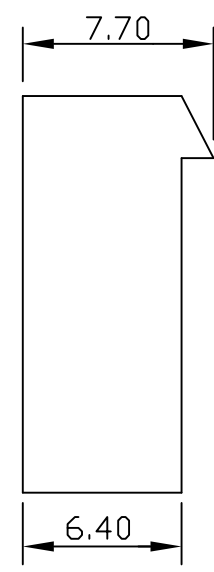
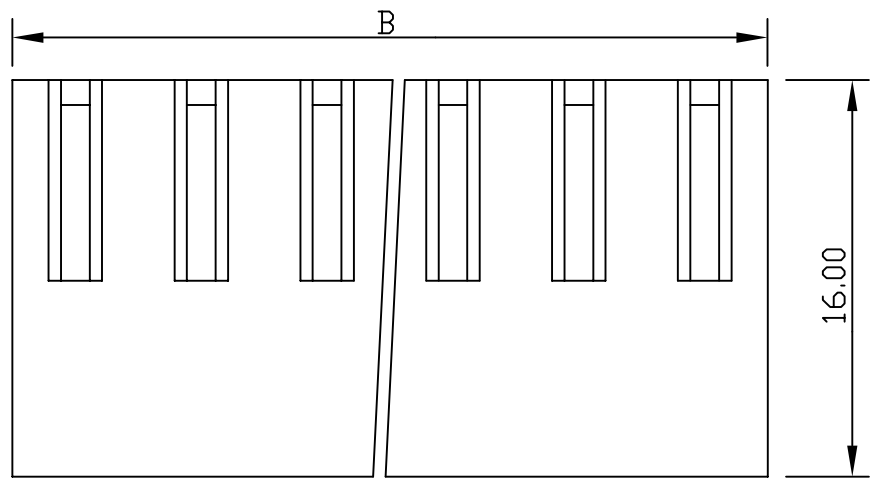


1 2 3 4 5 6 7 8 9 10 11 12 13 14

A
B
C
D
E
F
G
H
I
J

A
B
C
D
E
F
G
H
I
J

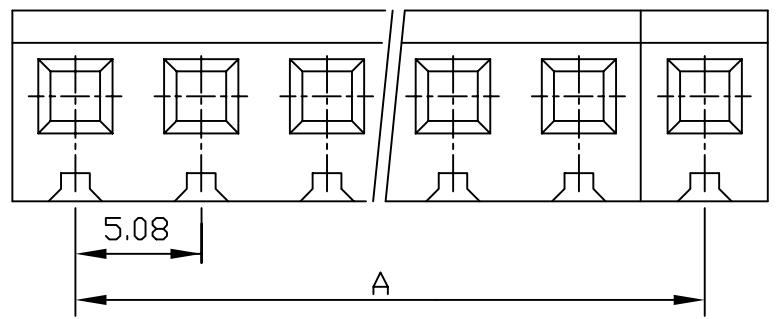

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC
 Voltage Rating: 250V AC, DC
 Operating Temp.: -25°C ~ +85°C
 Insulation Resistance: 1000MΩ/ min.
 Dielectric Withstanding Voltage: 1500V AC/ min.
 Contact Resistance: 10mΩ/ max.

Material

Material: Nylon66, UL94V-2

Poles	Part No.	Dimension mm (in.)	
		A	B
2	508G1-H02	5.08	10.16
3	508G1-H03	10.16	15.24
4	508G1-H04	15.24	20.32
5	508G1-H05	20.32	25.40
6	508G1-H06	25.40	30.48
7	508G1-H07	30.48	35.56
8	508G1-H08	35.56	40.64
9	508G1-H09	40.64	45.72
10	508G1-H10	45.72	50.80
11	508G1-H11	50.80	55.88
12	508G1-H12	55.88	60.96

Rev	Description/Date	Drawn By: Storm.li
△		Checked By: Simmon
△		Approved By: Tony

Customer:	
Part No.:	508G1-HXX
Title:	Housing

Third angle projection		Units: mm
General Dimension Tolerance	X.X ±0.25	X.XX ±0.1
	X.XXX ±0.08	

SGS Report No.: CE/2005/63003C

1 2 3 4 5 6 7 8 9 10 11 12 13 14