

# SPECIFICATIONS

Current Rating: 5A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: ≤10mΩ Max  
 Withstanding Voltage: 1000V AC/minute  
 Insulation resistance: ≥1000mΩ Min  
 After environmental testing: ≤20mΩ

## Material

Material: Nylon 66 , UL94V-0

# ORDER INFORMATION






5 H 3 0 0 0 F 0 - 2 X X B B L 0 0 K 0 1

Pitch 3.00mm    F:Female    2: Dual Row    No. of contacts per row    B:Black    B:Bag Package    RoHS



## Ordering Information & Dimensions













Poles	Dimensions (mm)	
	A	B
2*1P	—	4.00
2*2P	3.00	7.00
2*3P	6.00	10.00
2*4P	9.00	13.00
2*5P	12.00	16.00
2*6P	15.00	19.00
2*7P	18.00	22.00
2*8P	21.00	25.00
2*9P	24.00	28.00
2*10P	27.00	31.00
2*11P	30.00	34.00
2*12P	33.00	37.00

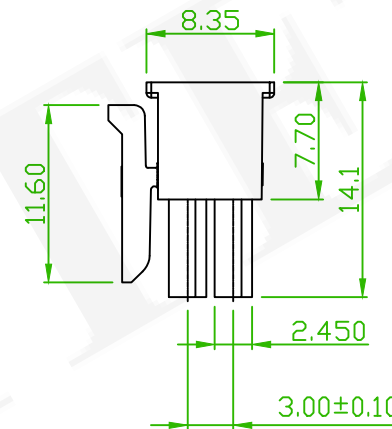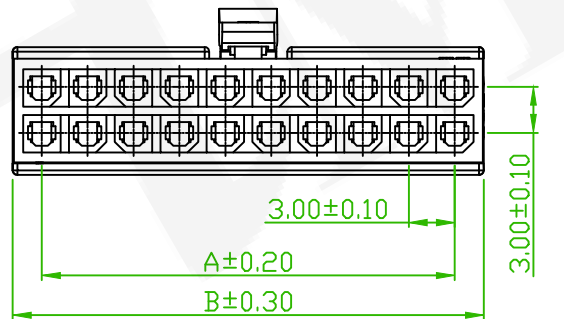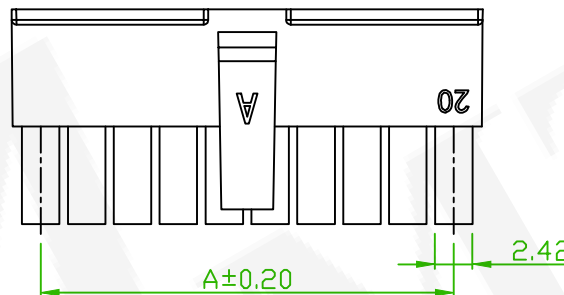

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x2	Add the plastics appearance	Alice	2021/12/27

糧德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	3.0mm HOUSING				頁數 Page	1/2
品號 PART NO.	5H3000F0-2XXBBL00K01			繪圖 DRAWN	Alice 2021/07/12	
圖號 DRAWING NO.	GN137-AZ342	版本 REV.	B	核對 CHECKED	Josh 2021/07/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2021/07/12	
公差 TOLERANCE	.X ± 0.30	單位 UNIT	mm	THIRD ANGLE PROJECTION		
	.XX ± 0.20					

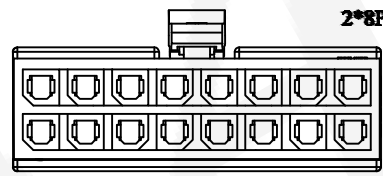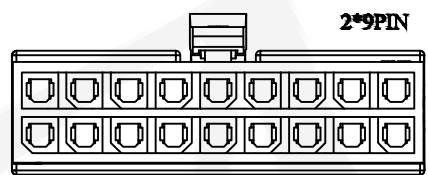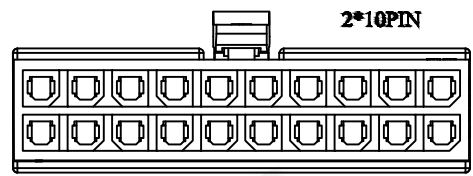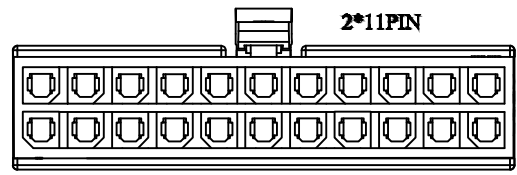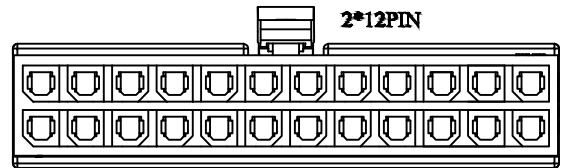

	Add the plastics appearance	Alice	2021/12/27
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	3.0mm HOUSING				頁數 Page	2/2
品號 PART NO.	5H3000F0-2XXBBL00K01			繪圖 DRAWN	Alice 2021/07/12	
圖號 DRAWING NO.	GN137-AZ342	版本 REV.	B	核對 CHECKED	Josh 2021/07/12	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2021/07/12	
公差 TOLERANCE	.X ± 0.30	單位 UNIT	mm	THIRD ANGLE PROJECTION		
	.XX ± 0.20					