




Female Terminal

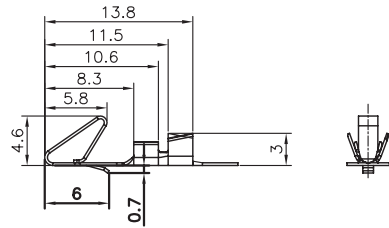



Female Terminal

Wire Range		O.D of Wire
Section Area (mm <sup>2</sup> )	AWG#	mm
0.2~0.75	24~18	1.3~2.8



PHU  
Female Housing



PWL-R  
Male Right Angle

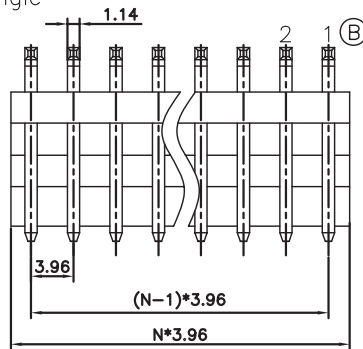

PWL  
Male V/T TYPE

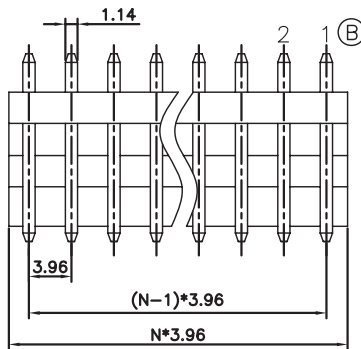

N=No. of contacts

NOTES:

1. MAIN SPECIFICATIONS

- . Housing material: NYLON 66
- . Wire range: AWG#24~#18
- . Rated voltage: 250V
- . Rated current: 1A
- . Contact resistance:  $\leq 30\text{m}\Omega$
- . Insulation resistance:  $\geq 1000\text{M}\Omega$
- . Withstanding voltage: 500V, AC 1 minute
- . Temperature range:  $-25 \sim +85^\circ\text{C}$
- . Recommend PC board thickness: 1.6mm

2. PRODUCT NUMBER CODE:

PHU- Female Housing

No. of contact  
2 to 13

PWL- R Male Right Angle

No. of contact  
2 to 13

PWL- Male V/T TYPE

No. of contact  
2 to 13