序号/RevNo.	名称/Title	文件编号/File No.
1	146F塑料件主体	
2	146F塑料件后盖	
3	欧式母端端子	

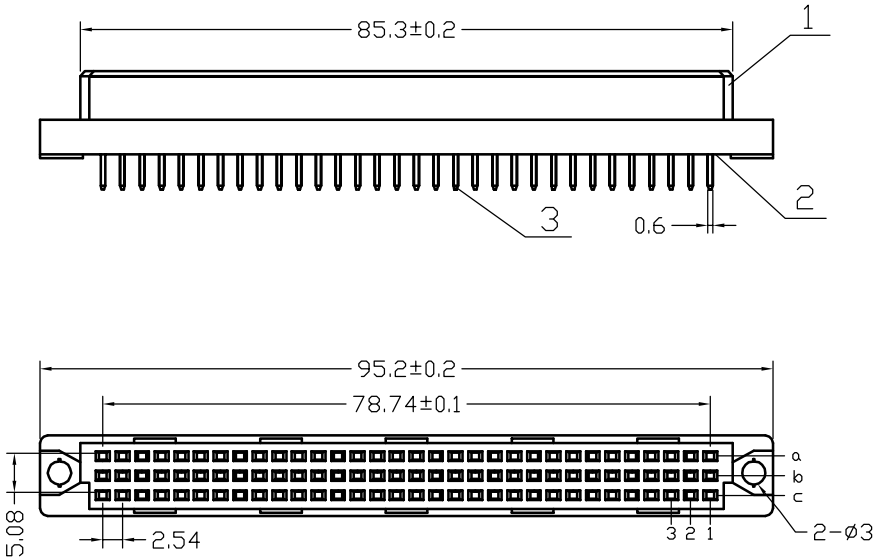

Specifications:
Contact Resistance: 30mΩ max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 2AMP

Dielectric Withstanding
Voltage: AC 1000V For 1 minute
Operating Temperature:-55° C--+105° C
Contact: Phosphor Bronze
Housing: PBT &30% Glass Fiber(UL 94V-0)

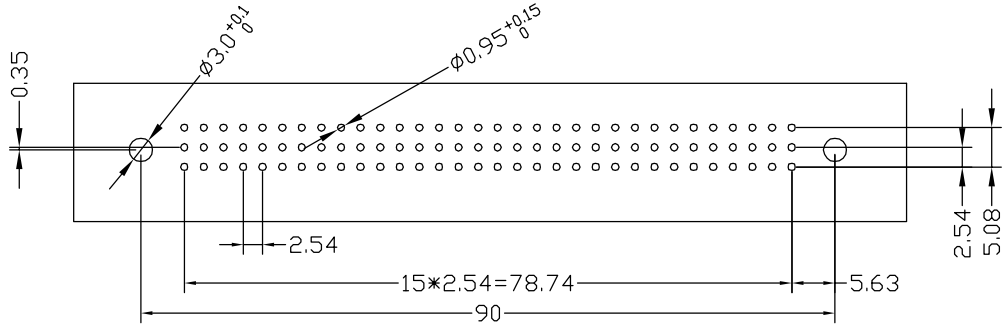

32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	a
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	b
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	c

CONTACT ARRANGEMENT

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X. ±0.2 X.° ±2°
		图名/Title	文件编号/File No.	.X ±0.1 .X° ±1°
新亚电子 XINYA ELECTRONIC CO.,LTD		146F-296		.XX ±0.05 .XX°±0.5°
			页序/Sheet	.XXX ±0.01
		备注/Remark		单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date

PDF 文件使用 "pdfFactory Pro" 试用版本创建 www.fineprint.cn