


本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.

RoHS compliant

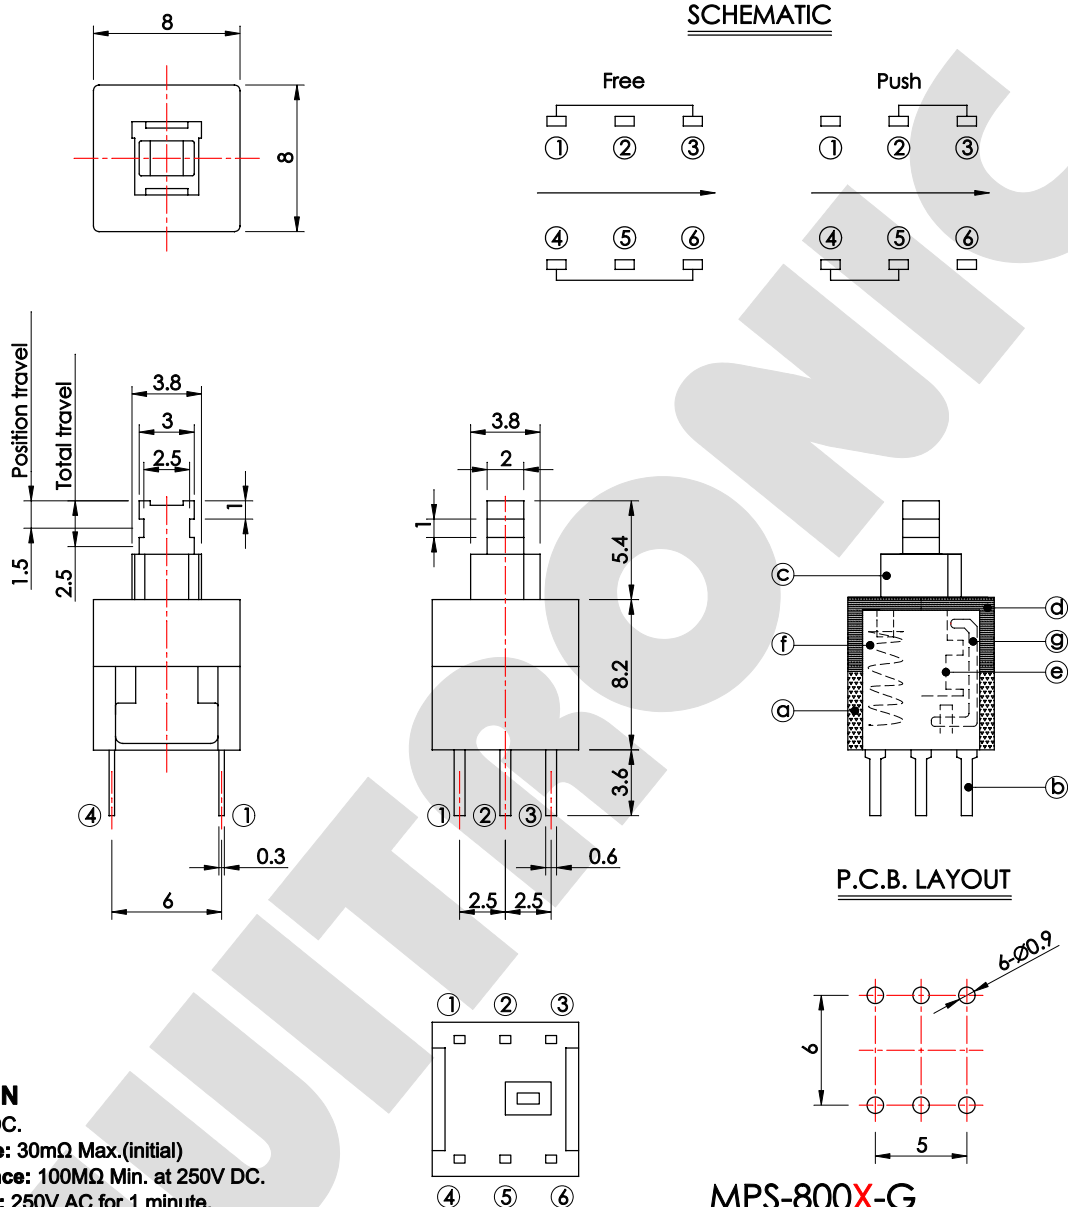

SPECIFICATION

- Rating: 0.1A 30V DC.
- Contact resistance: 30mΩ Max.(initial)
- Insulation resistance: 100MΩ Min. at 250V DC.
- Withstand voltage: 250V AC for 1 minute.
- Operating temperature: -25°C ~ +65°C.
- Operating force: 180±20g.
- Minimum load: 30mA 10V DC.(reference only)
- Life: 15,000 Cycles Max.
- Soldering temperature: 250°C Max. for 3 sec.
- Soldering time: 1 time only.
- Note: Unwashable, don't be immersed by epoxy and organic solvent.

MATERIAL

- Base: PA66, white. (a)
- Terminal: Brass, Ag plated. (b)
- Stem: POM, blue. (c)
- Case: POM, black. (d)
- Clip: Silver-Copper composite, natural. (e)
- Spring: Carbon steel wire, natural. (f)
- Fixed rod: Stainless, natural. (g)

MPS-800X-G

TYPE		RoHS compliant
<input type="checkbox"/>	Lock	
N	Non-Lock	
V	Non-Lock Click Sound	



HV2.3	△		
HV2.2	無	改版	2013.02.06
HV2.1	無	改版	2010.06.25
HV2.0	無	新繪製	2010.06.10
版本 VER.	符號 SYMBOL	修改內容 ALTERATION	更新日期 DATE

產品 PRODUCT		Pushbutton Switch		型號 MODEL NO.		MPS-800-G	
比例 SCALE	5 : 2	單位 UNIT	mm				
公差 TOLERANCE	.X=±0.3mm, .XX=±0.2mm						
製圖 DRAWN BY	核圖 CHECKED BY	主管 APPROVED BY					
Jay Kang	Alex Lin	Margaret Lee					

一綺電子企業股份有限公司
 總公司：110 台北市信義路四段415號13樓之3
 13F-3 NO. 415, SEC. 4, HSIN YI ROAD, TAIPEI, TAIWAN
 TEL : 886-2-27290229 (Rep.) FAX : 886-2-27582086
 URL : http://www.switronic.com.tw
 E-MAIL : switches@ms36.hinet.net