



SERIES SC797 DOUBLE POLE SWITCHES



SC797-6VAW-20P

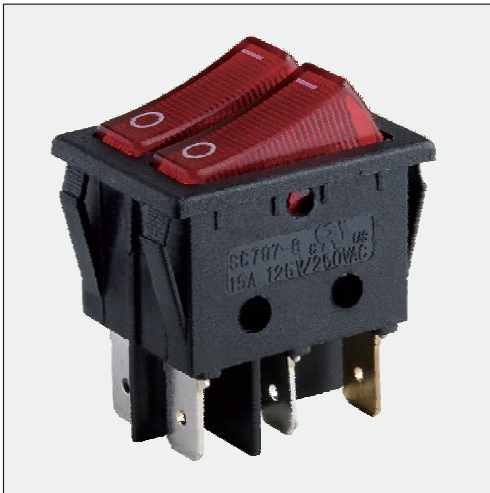

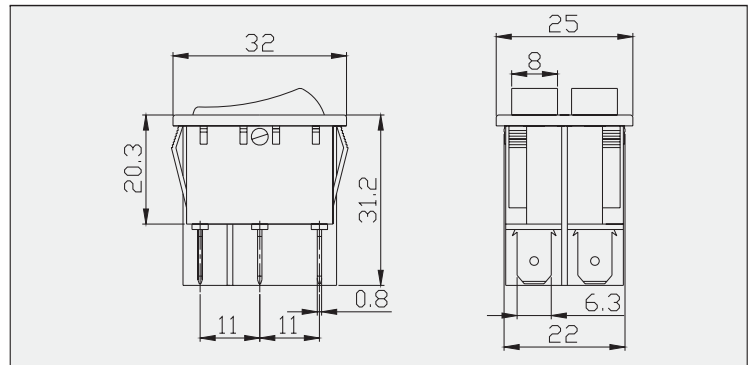

APPLIANCE CUT-OUT

Double pole Y	X=panel thickness		
	X	Y	Z
Z	0.75~1.25	30.8-0.1	22.1+0.1
	1.25~2	31.0-0.1	22.1+0.1
	2~3	31.2-0.1	22.1+0.1

◆ PRODUCT ADVANTAGE

- Big rocker convenient for operatin
- Excellent actuation characteristic
- Excellent SWPB spring support enough contact force and ensure mechanical life
- Various rocker for your choice
- Usually use in oven、coffee maker、stirrer、power strip,ets

◆ TECHNICAL SPECIFICATIONS

Electrical rating	15A 125/250VAC 15(3)A 250VAC T125/55
Electrical life	1E4
Mechanical life	5E4
Contact resistance	≤20m Ω
Insulation resistance	> 100M Ω
High voltage resistance	1500 VAC
Resistance to tracking	PTI 175
Contact gap DT with centre-OFF	> 3mm
Protection type	IP20
Ambient temperature	0°C...+125°C
Flammability	UL94V-0
Heat and fire resistance	850°C
Material of housing and rocker	PA/PC
Material of Contacts	Ag or AgCdO
Material of Terminals	Copper Alloy
Temperature rise at the terminals (According to electrical life endurance)	Max.30K (UL1054) Max.55K (EN61058-1)
Push-on force of terminals	≥96N
Approval marks	 
Suitable for appliances of protection class II	

