

US1A THRU US1M

SURFACE MOUNT ULTRAFAST RECOVERY RECTIFIER

Reverse Voltage – 50 to 1000 V


Forward Current – 1 A

Features

- For surface mount applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Ultrafast recovery times for high efficiency
- Plastic package has Underwriters Laboratories Flammability Classification 94V-0

Mechanical Data

- **Case:** SMA (DO-214AC) molded plastic
- **Terminals:** Solder plated, solderable per MIL-STD-750, method 2026 guaranteed
- **Polarity:** Color band denotes cathode end

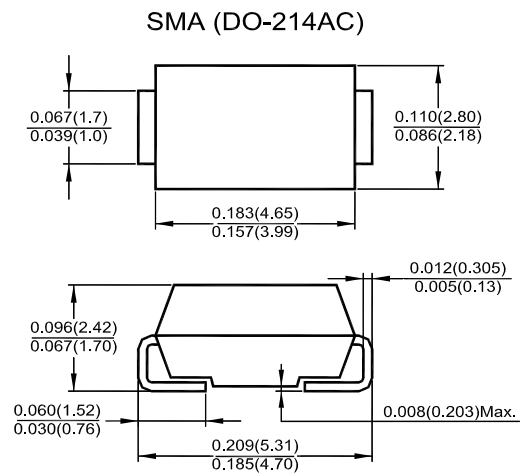


Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.


Parameter	Symbols	US1A	US1B	US1D	US1G	US1J	US1K	US1M	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_L = 100\text{ }^\circ\text{C}$	$I_{F(AV)}$	1							A
Peak Forward Surge Current 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	30							A
Maximum Forward Voltage at 1 A	V_F	1		1.4		1.7		V	
Maximum DC Reverse Current $T_A = 25\text{ }^\circ\text{C}$ at Rated DC Blocking Voltage $T_A = 100\text{ }^\circ\text{C}$	I_R	5 100							μA
Typical Junction Capacitance at 4 V, 1 MHz	C_J	17							pF
Maximum Reverse Recovery Time at $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $I_{rr} = 0.25\text{ A}$	t_{rr}	50				75			ns
Typical Thermal Resistance ¹⁾	$R_{\theta JA}$	50							$^\circ\text{C/W}$
Operating and Storage Temperature Range	T_J, T_S	- 55 to + 150							$^\circ\text{C}$

¹⁾ Mounted on P.C.B. with 0.2 X 0.2" (5 X 5 mm) copper pad areas.



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103










ISO 14001:2004
Certificate No. 71116




ISO 9001:2000
Certificate No. 0506098

Dated : 14/04/2008 H

US1A THRU US1M

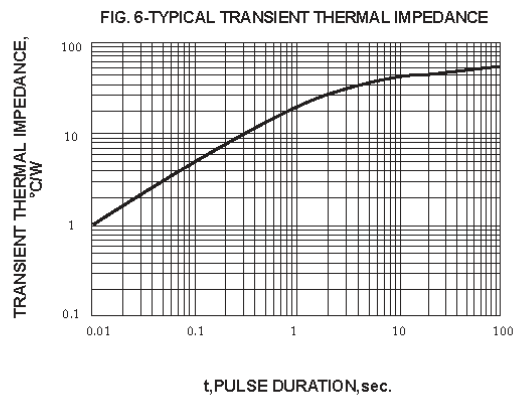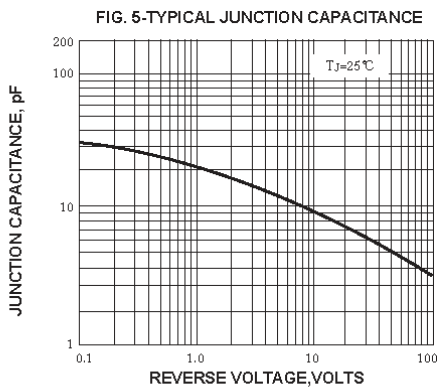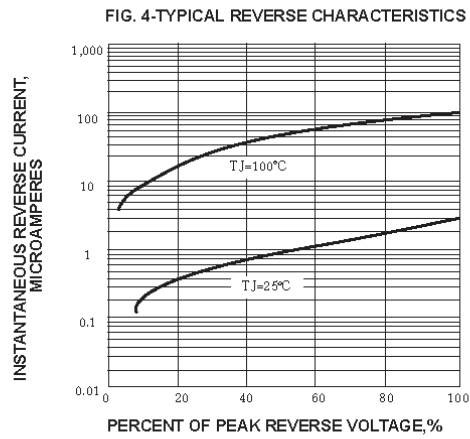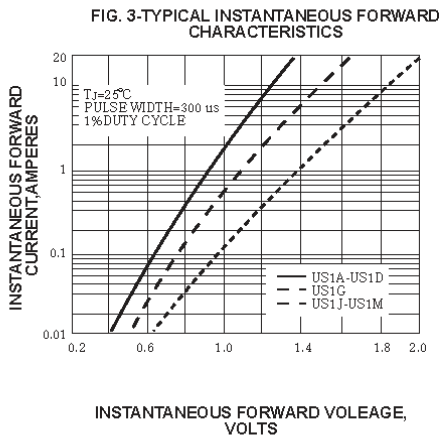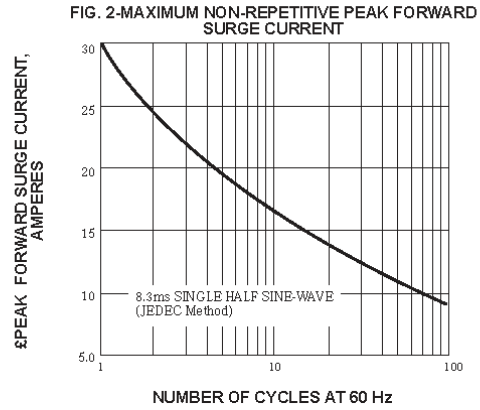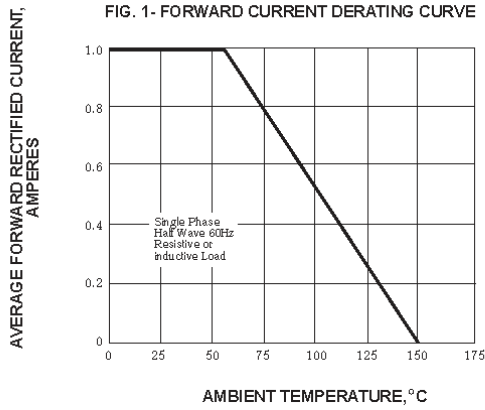

SEMTECH ELECTRONICS LTD.
 (Subsidiary of Sino-Tech International Holdings Limited, a company
 listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
 Certificate No. 05103

ISO 14001:2004
 Certificate No. 71116

ISO 9001:2000
 Certificate No. 0506098

Dated : 14/04/2008 H