


INSULATED SPADE TERMINALS Y型絕緣端子


TERMINAL MATERIAL : COPPER INSULATION MATERIAL : VINYL

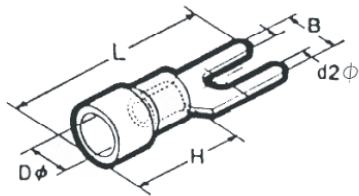



ITEM NO.	DIMENSIONS					WIRE RANGE			COLOR
	D2φ	B	L	H	Dφ	Single mm	Twine mm ²	AWG	
VF1.25-3YS	3.7	5.7	21	11	4.0	0.57 1.44	0.25 1.65	22~16	RED
VF1.25-3YW	3.7	6.2	21	11	4.0				
VF1.25-4YS	4.3	6.4	21	11	4.0				
VF1.25-4YW	4.3	7.2	21	11	4.0				
VF1.25-5Y	5.3	8.0	21	11	4.0	1.14 1.82	1.04 2.63	16~14	BLUE
VF1.25-6Y	6.4	10.7	22.5	11	4.0				
VF2-3YSA	3.2	5.7	21	11	4.5				
VF2-3YS	3.7	5.7	21	11	4.5				
VF2-3YW	3.7	6.2	21	11	4.5	1.82 2.4	2.63 4.6	12~10	YELLOW
VF2-4YS	4.3	6.4	21	11	4.5				
VF2-4YW	4.3	7.2	21	11	4.5				
VF2-5Y	5.3	8.0	21	11	4.5				
VF2-6Y	6.4	10.7	21	11	4.5	1.82 2.89	2.63 6.64	12~10	YELLOW
VF3.5-4YS	4.3	8.0	24.7	11	6.2				
VF3.5-5YS	5.3	8.0	24.7	13.7	6.2				
VF5.5-3Y	3.7	8.2	24.7	13.7	6.3				
VF5.5-4YW	4.3	8.2	24.7	13.7	6.3	1.82~3.65	6.64~10.52	8	RED
VF5.5-5Y	5.3	9.0	24.7	13.7	6.3				
VF5.5-6Y	6.4	12.0	24.7	13.7	6.3				
VF8-6Y	6.4	12.0	32	13.7	6.3				

INSULATED PIN TERMINALS 針型端子

TERMINAL MATERIAL : COPPER INSULATION MATERIAL : VINYL



ITEM NO.	DIMENSIONS			WIRE RANGE			COLOR
	Fφ	L	H	Single mm	Twine mm ²	AWG	
PIN1.25	2.0	22.9	11	0.57~1.44	0.25~1.65	22~16	RED
PIN2	2.0	22.9	11	1.14~1.82	1.04~2.63	16~14	BLUE
PIN5.5	2.7	27.3	16	1.82~2.89	2.63~6.64	12~10	YELLOW



ITEM NO.	DIMENSIONS					WIRE RANGE			COLOR
	B	I	L	G	H	Single mm	Twine mm ²	AWG	
PIN1.25F	3.1	0.8	17	12.5	4.5	0.57~1.44	0.25~1.65	22~16	RED
PIN2F	3.1	0.8	17	12.5	4.5	1.14~1.82	1.04~2.63	16~14	BLUE
PIN5.5F	3.3	1.0	21	14.5	6.5	1.82~2.98	2.63~6.64	12~10	YELLOW