RoHS



RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

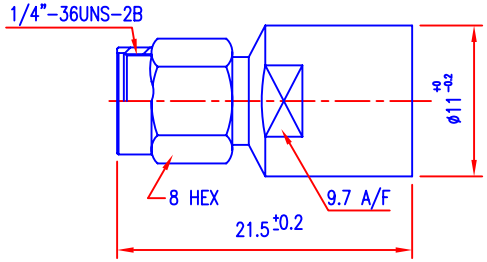

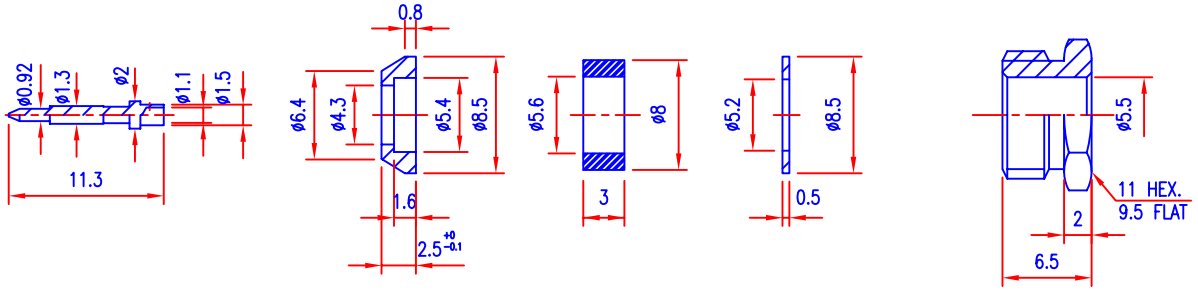

SMA MALE CLAMP TYPE
(RG58)

1. CONTACT PIN TO SOLDER
(中心針焊接)

NOTES:FINISH(PLATING THICKNESS IN MICRO-INCHES)
1.BRASS PER QQ-B-626
2.NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3.GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4.TEFLON MIL-P-19468
5.BERYLLIUM COPPER PER QQ-C-530
6.BRASS PER QQ-B-613

NO.	DESCRIPTION	QTY	MATERIAL	SPECIFICATION	FINISH	REMARK
	NUT		NOTE 1		NOTE 2	
	WASHER		NOTE 6		NOTE 2	
	GASKET		SILICONE		RED	
	BRAID HOLDER		NOTE 1		NOTE 2	
	CONTACT PIN		NOTE 1		NOTE 3	
	SHELL		NOTE 1		NOTE 2	
	C RING		NOTE 5		NONE	
	GASKET		SILICONE		RED	
	INSULATOR		NOTE 4		WHITE	
	BODY		NOTE 1		NOTE 2	

DRAW BY	周佩君	111907	SCALE	2 : 1	PROJ	ITEM NO. TL4001-58-BTNG
DEGN BY			UNIT	MM		TITLE SMA CONNECTOR
APPD BY						DRAWING NO. TL4001-58-BTNG-TNS61-C

DATE	DRAWG BY	REVISED	△

同利企業有限公司 TELE LONG ENTERPRISE CO.,LTD