


SPECIFICATIONS


Voltage Rating: 250V AC,DC
 Current Rating: 5A AC,DC
 Withstanding Voltage: 1500V AC/minute
 Temperature Range: -25°C to +85°C
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 10mΩ Max
 Material: Nylon 66,UL94V-2

ORDER INFORMATION


5 H 3 0 0 0 M 0 - 2 X X B B L 0 0 K 0 1

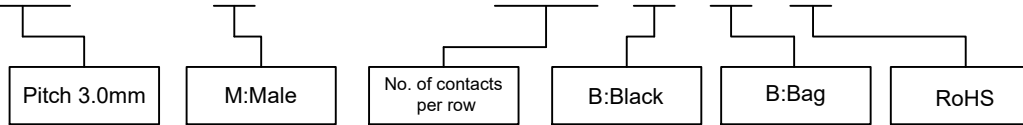


AMTEK 糧德
 2022.03.08
 Released DCC




2X7PIN




2X6PIN




2X8PIN



2X5PIN




2X9PIN




2X4PIN




2X10PIN




2X3PIN



2X11PIN




2X2PIN



2X12PIN



2X1PIN

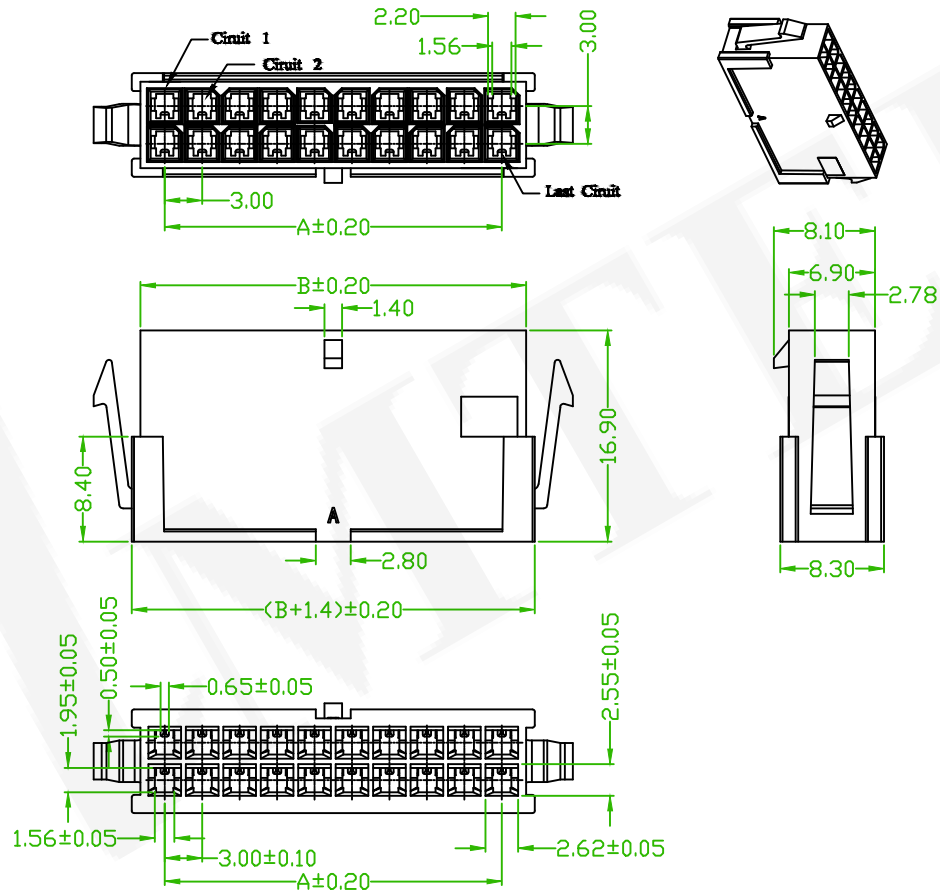

Poles	Dimensions (mm)	
	A	B
2*1P	—	3.95
2*2P	3.00	6.95
2*3P	6.00	9.95
2*4P	9.00	12.95
2*5P	12.00	15.95
2*6P	15.00	18.95
2*7P	18.00	21.95
2*8P	21.00	24.95
2*9P	24.00	27.95
2*10P	27.00	30.95
2*11P	30.00	33.95
2*12P	33.00	36.95

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	Add hole bitmaps	Alice	2022/03/07

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	3.0mm HOUSING			頁數 Page	1/1
品號 PART NO.	5H3000M0-2XXBBL00K01		繪圖 DRAWN	Alice 2022/02/16	
圖號 DRAWING NO.	GN137-AZ980	版本 REV.	B	核對 CHECKED	Josh 2022/02/16
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2022/02/16
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	