


SECTION A-A

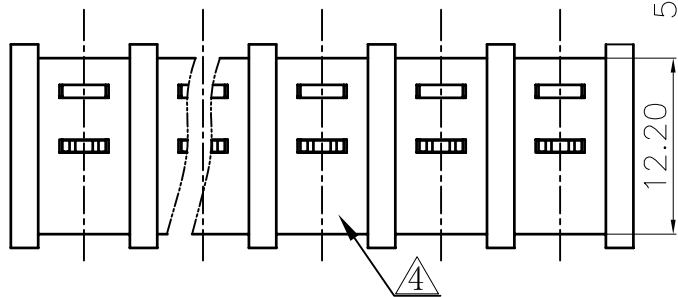

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面整理	CSX	12/23/05
△		增加UL刻字	CSX	06/05/06
△		修改脚宽	CSX	09/21/06
△		工程变更:品名商标更改到侧面	WLM	07/19/08

NOTES:

- Pitch: 8.25mm , Poles: 2P-26P
- Rated voltage/current: UL 300V/20A
IEC 450V/32A
- Operation temperatures: -40° C ~ +105° C
- Withstanding Voltage: AC2000V/1Min
- Insulation Resistance: 500MΩ/DC500V
- Wire Range: 22-12AWG, 4.0mm²
- Max. Torque Value: M3, 5.10Kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to	over	over	over	over	over		
6	10	10	30	60	100	150	
to	to	to	to	to	to	to	
6	10	24	30	60	100	150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
							0.05/10

3	3*6(6*6) bright-Screw	S000000450(H)	XX	Steel	Ni Plated
2	DG25C-Pin Header	5001B00010(H)	XX	Brass	SnCe
1	DG35C-B-Housing	5002A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)	DFTO DZJ	DATE 10/25/05*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE	
		MFO	DATE	
		APPVL	DATE	
	MM	±		NAME DG35C-B-XXP-1Y-00A(H)
.0 ±	±		MATERIAL : G.E : FINISH : SCALE : 1:1	
.00 ±	±			
.000 ±	±			SIZE A3 REV T4 07/19/08*
ANGLES ± 1°				DO NOT SCALE DRAWING SHEET 1 OF 1
THIRD ANGLE PROJECTION				