

SR1020CT THRU SR1060CT

SCHOTTKY BARRIER RECTIFIERS

Reverse Voltage - 20 to 60 V


Forward Current - 10 A

Features

- Plastic package has UL flammability classification 94V-0
- Metal of silicon rectifier, majority carrier conduction
- Guard ring for transient protection
- High capability
- Low power loss, high efficiency
- High current capability, low forward voltage
- High surge capacity
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications

Mechanical Data

- **Case:** Molded plastic body, TO-220
- **Terminals:** Axial leads, solderable per MIL-STD-202 method 208 guaranteed
- **Polarity:** As marked
- **Mounting Position:** Any

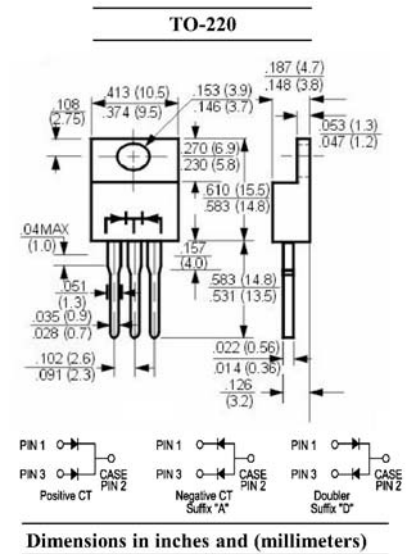


Absolute Maximum Ratings and Characteristics

Ratings at 25°C unless otherwise specified. Single phase, half wave, resistive or inductive load. For capacitive load, derate by 20%.

Parameter	Symbols	SR1020CT	SR1030CT	SR1040CT	SR1050CT	SR1060CT	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	10					A
Peak Forward Surge Current 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	175					A
Maximum Instantaneous Forward Voltage at 5 A	V_F	0.55			0.7		V
Maximum Reverse Current $T_C = 25^\circ\text{C}$ at Rated Reverse Voltage $T_C = 100^\circ\text{C}$	I_R	0.5 50					mA
Typical Junction Capacitance ¹⁾	C_{tot}	400					pF
Typical Thermal Resistance ²⁾	$R_{\theta JC}$	3					°C/W
Operating Junction Temperature Range	T_j	- 55 to + 125			- 55 to + 150		°C
Storage Temperature Range	T_{stg}	- 55 to + 150					°C



¹⁾ Measured at 1 MHz and applied reverse voltage of 4 Volts.

²⁾ Thermal Resistance from Junction to case per leg.




SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)




SR1020CT THRU SR1060CT


Forward current derating curve

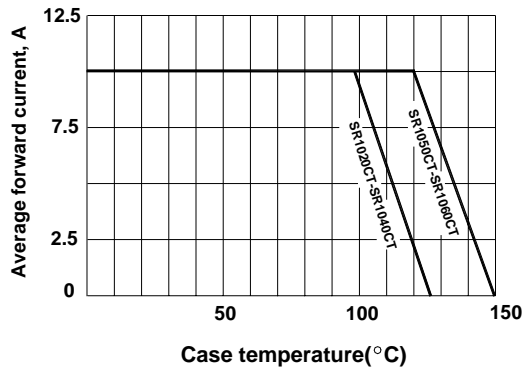


Typical reverse characteristics per leg

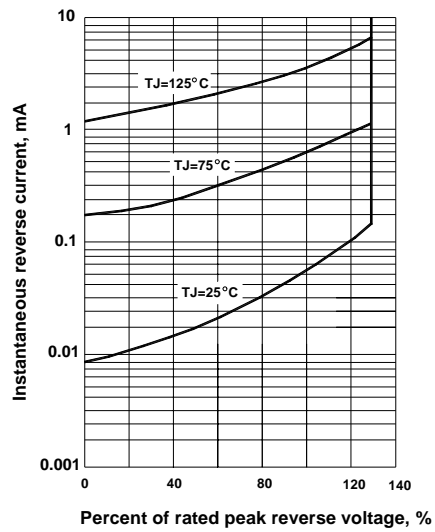



Maximum non-repetitive peak forward surge current

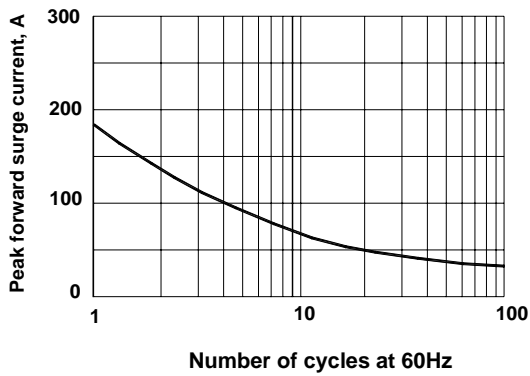

Typical forward characteristics per leg

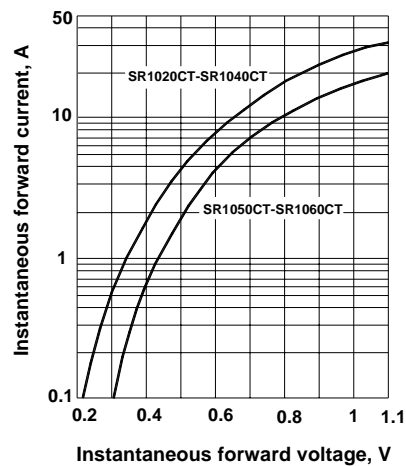

Typical junction capacitance per leg

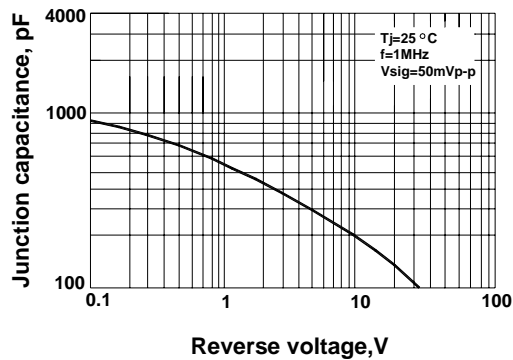

SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)

