


Specifications:

Current Rating: 1AMP
 Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Voltage: AC 500V For 1 minute
 Operating Temperature: -55 °C --- +105 °C

Material:

Contact: Brass
 Housing: Nylon-6T+30% Glass Fible (UL94V-0)

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x.' ±2'
				.x ±0.1	.x' ±1'
				.xx ±0.05	.xx' ±0.5'
				.xxx ±0.01	
图名/Title				文件编号/File No.	
112-B直针产品图				QJ/XYT-12027	
备注/Remark				页序/Sheet	
				单位/units: mm	

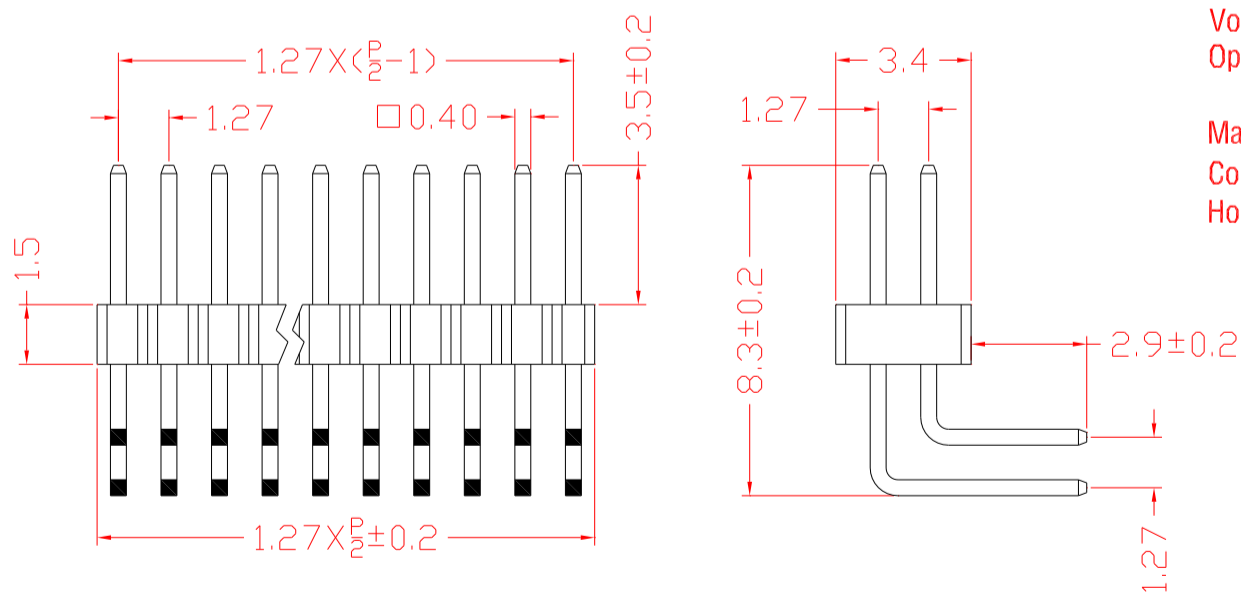

Specifications:

Current Rating: 1AMP
 Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Voltage: AC 500V For 1 minute
 Operating Temperature: -55 °C --- +105 °C

Material:

Contact: Brass
 Housing: Nylon-6T+30% Glass Fible (UL94V-0)

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x.' ±2'
				.x ±0.1	.x' ±1'
				.xx ±0.05	.xx' ±0.5'
				.xxx ±0.01	
图名/Title				文件编号/File No.	
112-B弯针产品图				QJ/XYT-12028	
备注/Remark				页序/Sheet	
				单位/units: mm	