


**INSULATED RING TERMINALS 圓型絕緣端子**

TERMINAL MATERIAL : COPPER INSULATION MATERIAL : VINYL

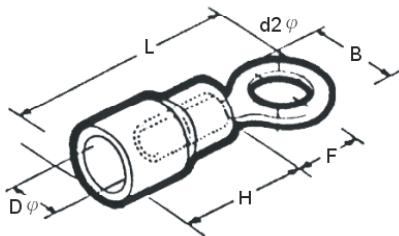

mm

ITEM NO.	DIMENSIONS					WIRE RANGE			COLOR
	d2φ	B	L	H	Dφ	Single mm	Twine mm <sup>2</sup>	AWG	
VF1.25-3A	3.2	5.5	16.3	11	4.0	0.57   1.44	0.25   1.65	22~16	RED
VF1.25-3	3.7	5.5	16.3	11	4.0				
VF1.25-3M	3.7	6.6	17.6	11	4.0				
VF1.25-4	4.3	8.0	18.3	11	4.0				
VF1.25-4M	4.3	6.6	17.6	11	4.0				
VF1.25-5	5.3	8.0	18.3	11	4.0				
VF1.25-6	6.4	11.6	22.4	11	4.0				
VF1.25-8	8.4	13.6	30	11	4.0				
VF1.25-10	10.5	13.6	30	11	4.0				
VF2-3A	3.2	8.5	18.7	11	4.5				
VF2-3	3.7	8.5	18.7	11	4.5				
VF2-3M	3.7	6.6	17.3	11	4.5				
VF2-4	4.3	8.5	18.7	11	4.5				
VF2-4M	4.3	6.6	17.3	11	4.5				
VF2-5	5.3	9.5	18.2	11	4.5				
VF2-6	6.4	12.0	22.0	11	4.5				
VF2-8	8.4	12.0	22.0	11	4.5				
VF2-10	10.5	13.6	24.9	11	4.5				
VF3.5-4M	4.3	9.5	26.3	13.7	6.2	1.82   2.4	2.63   4.6	12~10	YELLOW
VF3.5-5M	5.3	9.5	26.3	13.7	6.2				
VF5.5-3	3.7	9.5	26.3	13.7	6.3	1.82   2.89	2.63   6.64	12~10	YELLOW
VF5.5-4	4.3	9.5	26.3	13.7	6.3				
VF5.5-5	5.3	9.5	26.3	13.7	6.3				
VF5.5-6	6.4	12.0	33.0	13.7	6.3				
VF5.5-8	8.4	15.0	34.0	13.7	6.3				
VF5.5-10	10.5	15.0	34.0	13.7	6.3				
VF8-3	3.7	14.0	29.5	17	7.0	2.89   3.65	6.64   10.52	8	RED
VF8-5	5.3	10.0	29.5	17	7.0				
VF8-6	6.4	12.0	31.0	17	7.0				
VF8-8	8.4	14.0	37.0	17	7.0				
VF8-10	10.5	18.0	38.0	17	7.0				