
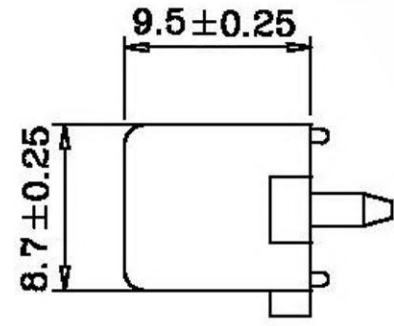


1 2 3 4 5 6 7 8



A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

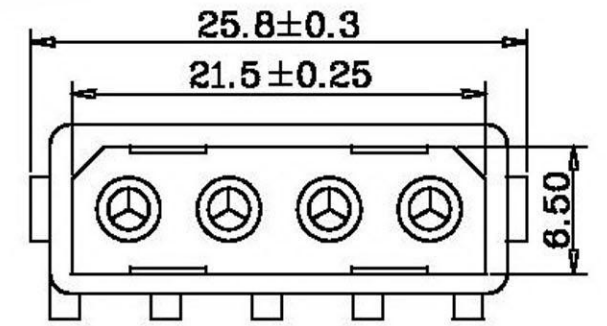


- Features:**
- Material: Nylon 66 UL94-V2
 - Two P.C tall lengths
 - Pin Material: Brass/Tin-Plated

- Specification:**
- Pitch between poles 5.08mm
 - Rated Voltage 250V AC,DC
 - Rated Current 5A AC,DC
 - Withstand voltage 1500V AC/minute
 - Insulation Resistance 1000M Ohms/min
 - Temperature Range -25°C~+105°C

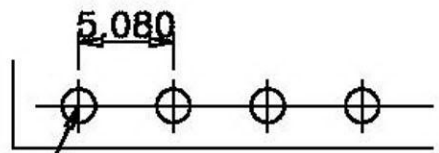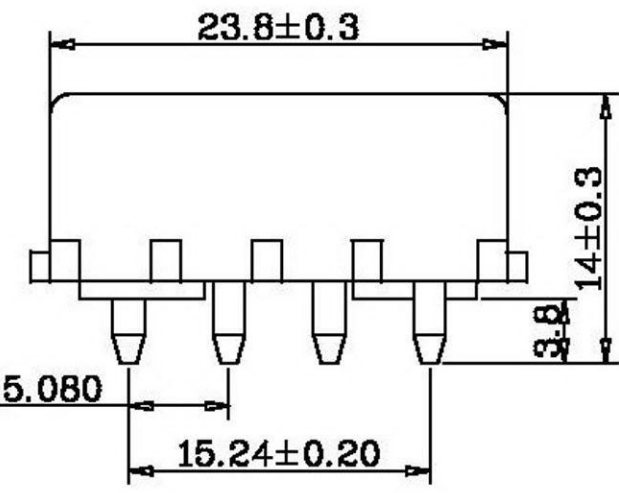

P.C.B Thickness 1.6~2.0mm
P.C.B Hole dia. ϕ 1.8±0.05mm

P.C.B LAYOUT

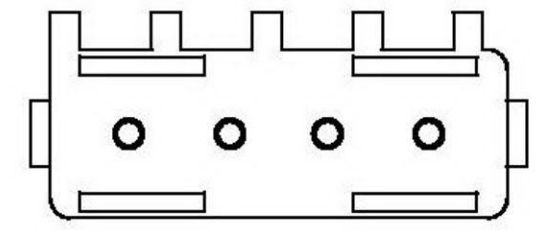

1 2 3 4 5 6 7 8

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 <i>Helen</i> DATE 制表日 2012/7/31	TOLERANCE 容許公差 0 ±0.25 .00 ±0.13 ANG ±	PART NAME 品名 5.08mm POWER PLUG 4P STRAIGHT TYPE TIN PLATED WHITE ROHS	PART NO. 料號 W2470-04PSTW00R
SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	SIZE 紙張尺寸 A4 REV. 版本 C		