



REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		25%GF变更为23%GF	CSX	03/24/06	
△		增加UL刻字	CSX	04/17/06	
△		品名、料号增加环保标识“00”	YeJ	12/08/07	

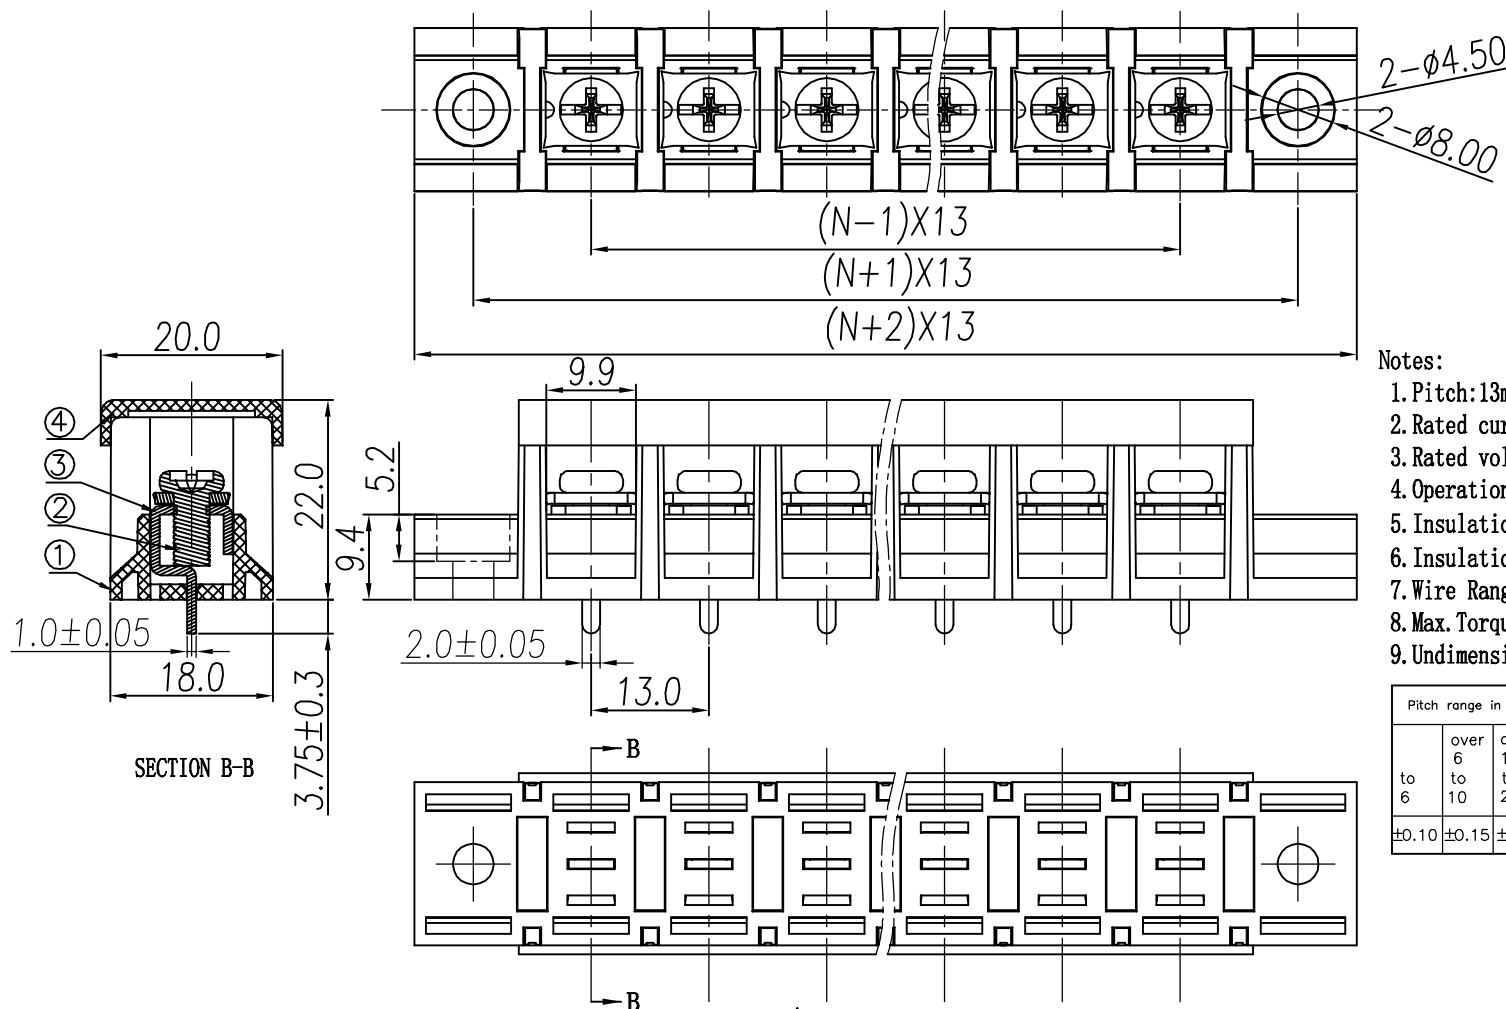

- Notes:
1. Pitch:13mm ,Poles:2-18P
  2. Rated current:40A
  3. Rated voltage:600V
  4. Operation temperatures:-30° C~+120° C
  5. Insulation Withstand Voltage:AC2000V/1min
  6. Insulation Resistance:1000MΩ /DC500V
  7. Wire Range:18~10AWG
  8. Max. Torque Value:12. 24kgf. cm
  9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	∩	
to 6							∇	
	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	
							±1.0	
							0.05/10	

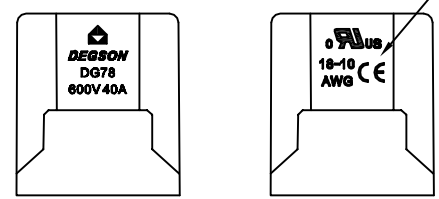

4	DG78-Cover	5034C07XXA (H)	1	PC	
3	DG78C Pin header	5009B00010 (H)	XX	Brass	SnCe plated
2	M4*8 (8*10) bright Screws	S000000510 (H)	XX	Steel	Ni plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG78 Housing	5034MOYXXA (H)	1	PA66+23%GF	UL94V-0

MM (INCH)	DFTO Zhuwm	DATE 01/13/06"
TOLERANCES EXCEPT AS NOTED	CHKD	DATE
	MFO	DATE
	APPVL	DATE
MM	±	
.0 ±	±	
.00 ±	±	
.000 ±	±	
ANGLES ± 1°	G.E :	
THIRD ANGLE PROJECTION	FINISH :	
	SCALE : 1:1	

NAME		DG78C-A-XXP-1Y-00A(H)	
DRAWING NO.	DG78C-E01	SIZE	A3
/PART NO.		REV	T3
			12/08/07
DO NOT SCALE DRAWING		SHEET 1	OF 1