



## DPP120 - 960 Series

120W, 240W, 480W & 960W 3 Phase  
DIN Rail Mount Power Supplies

- Low Cost
- 12V, 24V or 48V Outputs
- Wide Range 340 to 575VAC Input
- Parallel Function Switch (240 & 480W)
- Current Share (960W)
- -40°C to +71°C Operation
- Convection Cooled

### Key Market Segments & Applications

Industrial Controls:	Motor Control Systems
Factory Automation:	Process Control, Automotive,
Test & Measurement:	Chemical Processing
	Burn in & Test,
	Instrumentation Measurement

### DPP120 - 960 Features and Benefits

#### Features

- PFC Compliant to EN61000-3-2
- UL508 Approvals
- TS35/7.5 or TS35/15 DIN Rail Mounting

#### Benefits

- Supports Global Use
- Easier System Configuration
- Easy System Integration


### Specifications

ITEMS		MODELS	DPP120-xx-3	DPP240-xx-3	DPP480-xx-3	DPP960-xx-3
AC Input Voltage range (1)	VAC		340 - 575VAC, three phase			
Input Frequency	Hz		47 - 63Hz			
Inrush Current (380-480VAC) (typ)	A		10A	20A	20A	30A
Power Factor (2)	-		0.55	0.55	0.65	0.8
Input Current (400VAC) (typ)	A		0.36A	0.65A	1.1A	1.72A
Output Voltage Accuracy	%		-0, +1% of Nominal			
Line Regulation	%		±1%			
Load Regulation	%		±1% (±5% when set in parallel mode)			
Ripple and Noise (20MHz BW)	mV		100mV	100mV	100mV	80mV
Overcurrent Protection (Typ)	-		115 - 135%	120 - 140%	110 - 135%	110 - 130%
Overvoltage Protection	V		See model selector			
Overtemperature Protection	-		Yes, auto recovery			
Hold Up Time (380-480VAC)	ms		> 20ms	> 20ms	> 20ms	> 15ms
Parallel operation (up to 90% load)	-		Set in parallel (droop) mode - up to 2 units			
LED Indicators	-		Green LED = On, Red LED = DC Output Low			
DC Good Relay (24V models only)	-		0.3A rated normally open relay contacts, closes when output is above 17.6 - 19.4V			
Operating Temperature	-		-40°C <sup>(3)</sup> to +71°C (Derate linearly 2.5%/°C from 61°C to 71°C, 3.5%/°C for DPP960)			
Storage Temperature	-		-40°C to +85°C			
Operating Humidity (non condensing)	-		20 - 95% RH			
Cooling	-		Convection. Recommend 25mm clearance on all sides			
Withstand Voltage	-		Input to Output 3kVAC, Input to Ground 1.5kVAC for 1 min.			
Isolation Resistance	Ω		>100MΩ at 25°C & 70%RH, Output to Ground 500VDC			
Vibration	-		IEC 60068-2-6. 10- 500Hz, 2G on X, Y & Z axes			
Shock	-		IEC 60068-2-27. Half sinewave, 4G, 22ms, 3 times each face			
Safety Agency Approvals	-		UL508 Listed, UL60950-1, EN60950-1, CE			
Conducted & Radiated EMI	-		EN55022 class B			
Immunity	-		IEC 61000-4-2, -3, 4, -5, -6, -8, -11			
Weight (Typ)	g		800	1100	1720	3400g
Size (WxHxD)	mm		74.3 x 124 x 111.9	89 x 124 x 111.9	150 x 124 x 111.9	275.8 x 126.2 x 111.9
Switching Frequency	kHz		70	25	80	52
MTBF (Bellcore Issue 6 @ 40°C, GB)	Hours		527,000	488,000	411,000	352,000
Case material	-		Metal			
Warranty	yrs		3			


- Notes:** (1) Bi-phase input is permissible, but output load must be derated to 75% load  
 (2) Passive, meets EN61000-3-2  
 (3) DPP480 -30°C

<b>Model Selector</b>					
<b>Model</b>	<b>Voltage (V)</b>	<b>Adjust Range (V)</b>	<b>Output Current (A)</b>	<b>Overvoltage (V)</b>	<b>Efficiency (%)</b>
DPP120-12-3	12V	11.4 - 14.5V	10A	14.5 - 17.4V	87%
DPP120-24-3	24V	22.5 - 28.5V	5A	30 - 33V	89%
DPP240-24-3	24V	22.5 - 28.5V	10A	30 - 33V	90%
DPP480-24-3	24V	22.5 - 28.5V	20A	30 - 33V	90%
DPP960-24-3	24V	22.5 - 28.5V	40A	30 - 33V	92%
DPP240-48-3	48V	47 - 56V	5A	60 - 68V	91%
DPP480-48-3	48V	47 - 56V	10A	60 - 68V	91%
DPP960-48-3	48V	47 - 56V	20A	60 - 68V	93%


## Outline Drawing DPP120

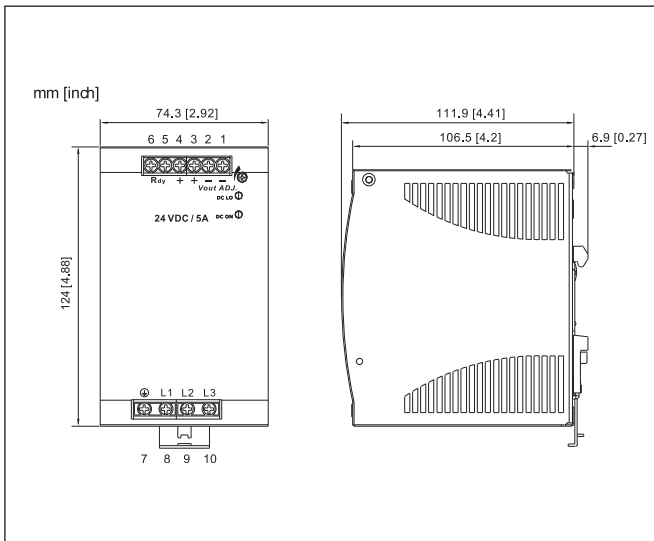


## Outline Drawing DPP240

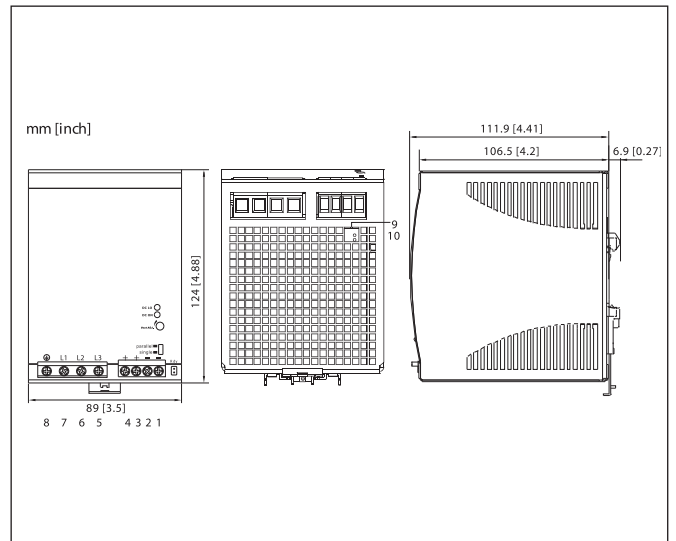

## Outline Drawing DPP480

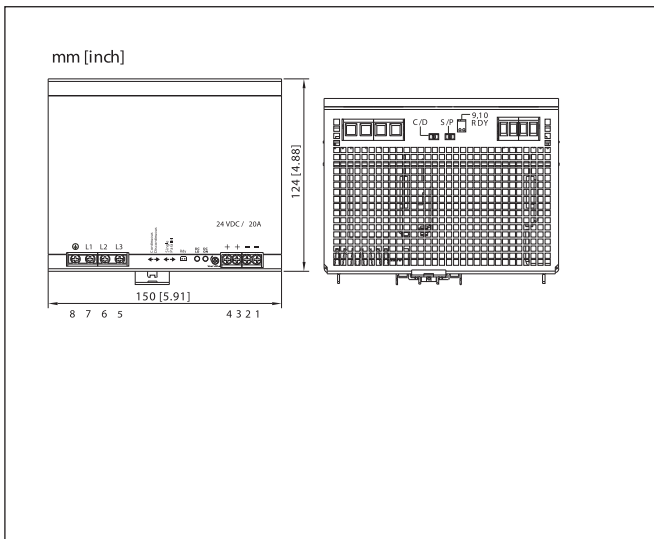

## Outline Drawing DPP960

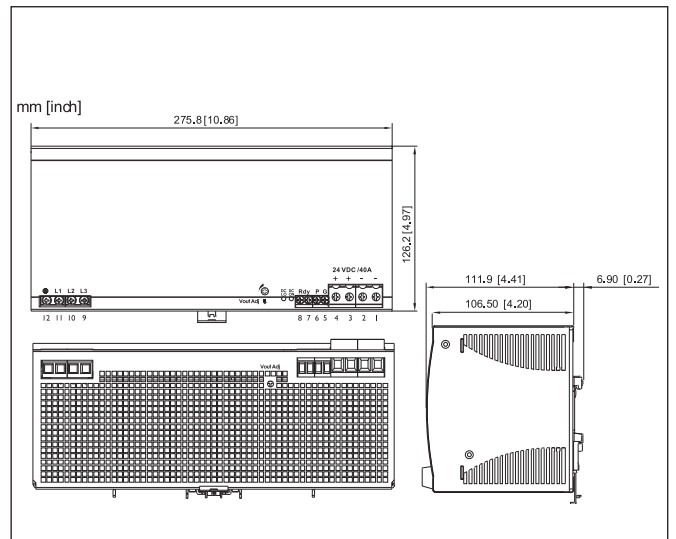

**Snap-on Mounting: snap onto DIN Rail TS35/7.5 or TS35/15. (no tools required)**



**TDK-Lambda France SAS**  
Tel: +33 1 60 12 71 65  
france@fr.tdk-lambda.com  
www.emea.lambda.tdk.com/fr



**Italy Sales Office**  
Tel: +39 02 61 29 38 63  
info.italia@it.tdk-lambda.com  
www.emea.lambda.tdk.com/it



**Netherlands**  
info@nl.tdk-lambda.com  
www.emea.lambda.tdk.com/nl



**TDK-Lambda Germany GmbH**  
Tel: +49 7841 666 0  
info@de.tdk-lambda.com  
www.emea.lambda.tdk.com/de



**Austria Sales Office**  
Tel: +43 2256 655 84  
info@at.tdk-lambda.com  
www.emea.lambda.tdk.com/at



**Switzerland Sales Office**  
Tel: +41 44 850 53 53  
info@ch.tdk-lambda.com  
www.emea.lambda.tdk.com/ch



**TDK-Lambda Nordic**  
Tel: +45 3222 8086  
info@dk.tdk-lambda.com  
www.emea.lambda.tdk.com/dk



**TDK-Lambda UK Ltd.**  
Tel: +44 (0) 12 71 85 66 66  
info@uk.tdk-lambda.com  
www.emea.lambda.tdk.com/uk



**TDK-Lambda Ltd.**  
Tel: +9 723 902 4333  
info@tdk-lambda.co.il  
www.emea.lambda.tdk.com/il



**C.I.S.**  
**Commercial Support:**  
Tel: +7 (495) 665 2627  
**Technical Support:**  
Tel: +7 (812) 658 0463  
info@tdk-lambda.ru  
www.emea.lambda.tdk.com/ru



**TDK-Lambda Americas**  
Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
powersolutions@us.tdk-lambda.com  
www.us.lambda.tdk.com



**TDK Electronics do Brasil Ltda**  
Tel: +55 11 3289-9599  
sales.br@tdk-electronics.tdk.com  
www.tdk-electronics.tdk.com/en



**TDK-Lambda Corporation**  
Tel: +81-3-6778-1113  
www.jp.lambda.tdk.com



**TDK-Lambda (China) Electronics Co. Ltd.**  
Tel: +86 21 6485-0777  
powersolutions@cn.tdk-lambda.com  
www.lambda.tdk.com.cn



**TDK-Lambda Singapore Pte Ltd.**  
Tel: +65 6251 7211  
tts.mkt@sg.tdk-lambda.com  
www.sg.lambda.tdk.com



**TDK India Private Limited, Power Supply Division**  
Tel: +91 80 4039-0660  
mathew.philip@in.tdk-lambda.com  
www.sg.lambda.tdk.com

