


| REVISION RECORD | | | | |
|-----------------|-----|-------------|------|------|
| REV | ECD | DESCRIPTION | DRFT | DATE |
| | | | | |

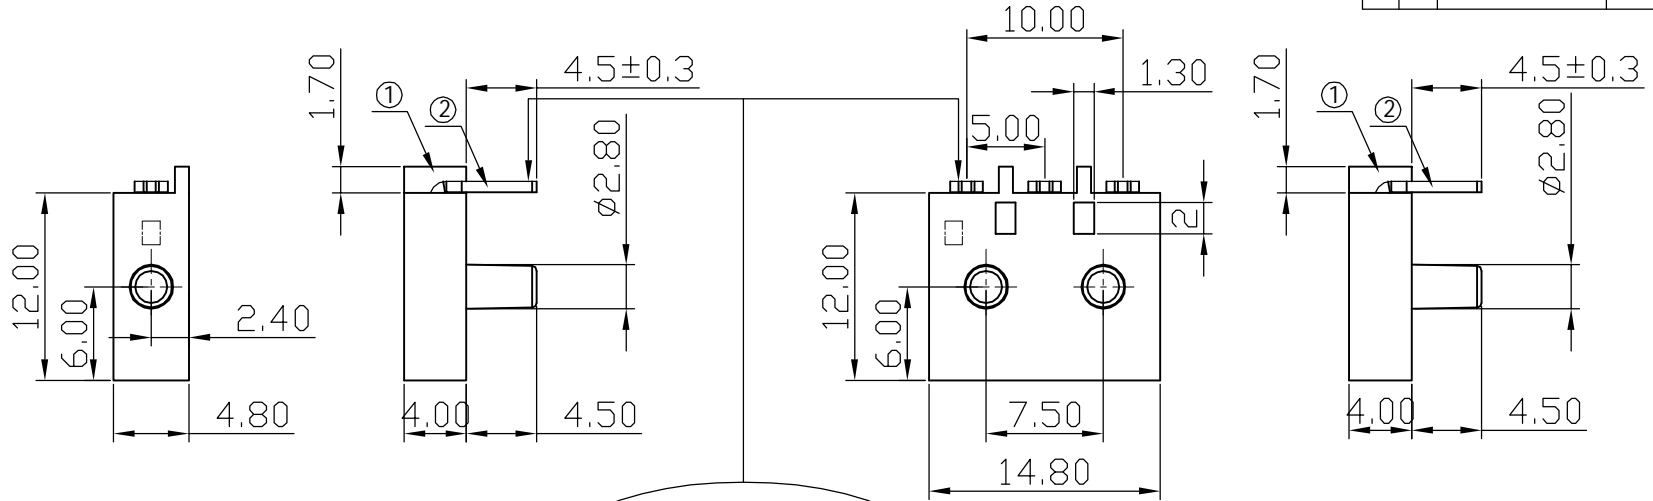


装配时焊脚光面一律朝外

- Notes:
- Pitch: 5.0mm, Poles: 1-3P
 - Rated voltage/current: UL1059 300V/2A
IEC 250V/4A
 - Operation temperatures: -40°C ~ +125°C
 - Withstanding Voltage: AC2000V/1min
 - Insulation Resistance: 5000MΩ / DC1000V
 - Contact Resistance: <5mΩ
 - Wire Range: 0.14 ~ 0.5mm²
 - Undimensioned Tolerances:

| Pitch range in mm | Nominal dimension range in mm | | | | | | — |
|-------------------|-------------------------------|---------------|---------------|---------------|---------------|-----------------|-------------|
| | over 6 to 6 | over 10 to 10 | over 10 to 24 | over 30 to 30 | over 60 to 60 | over 100 to 150 | |
| ±0.10 | ±0.15 | ±0.25 | ±0.2 | ±0.3 | ±0.5 | ±0.7 | ±1.0 Q05/H0 |

模穴号1-7

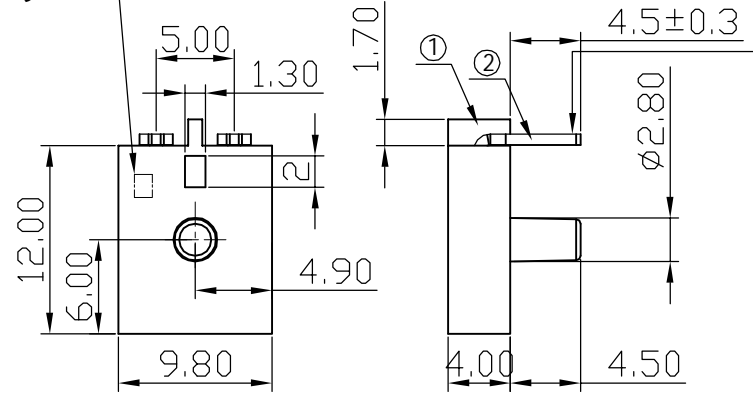

| 2 | DG106-10A-Pin header | 4146B00020 (H) | XX | Brass | SnCe |
|------------------------|----------------------------|----------------|----------------------|-------------------------------------|---------|
| 1 | DG106-Housing | 4146A17XXA (H) | 1 | PC | UL94V-0 |
| ITEM | NAME OF PART | NO. OF PART | Q'TY | MATERIAL | NOTES |
| DETACHED LISTS | MM (INCH) | DFTD YHG | DATE 10/09/08 | 宁波高正电子有限公司 | |
| | TOLERANCES EXCEPT AS NOTED | CHKD | DATE | DEGSON® DEGSON ELECTRONICS CO., LTD | |
| | MM | MFD | DATE | NAME | |
| | .0 ± | APPVL | DATE | DG106-5.0-XXP-17-10A(H) (1-3P) | |
| | .00 ± | MATERIAL : | | DRAWING NO. DG106-5.0-E03 | |
| ANGLES ± 1° | G.E : | | /PART NO. | | |
| THIRD ANGLE PROJECTION | FINISH: | | DO NOT SCALE DRAWING | | |
| | SCALE : 1:1 | | SHEET 1 OF 1 | | |