

## Features



- ◆ Operating temperature: -40 to +85°C
- ◆ 9-18/18-36/36-75Vdc input
- ◆ 5V/9V/12V/15V/24V/±5V/±9V/±12V/±15V output
- ◆ Low ripple & noise
- ◆ Efficiency up to 86%
- ◆ 100% burn-in
- ◆ Continuous short circuit protection
- ◆ Six-sided continuous shield

## General Description

VA\_D-15W & VB\_D-15W series high power density, can help you save valuable board space. Wide input voltage range, low starting current, good load characteristics, and minimum ripple & noise characteristics. The products used in all ceramic capacitors, all SMT processing technology, excellent performance, stable and reliable.



## Functional Diagram

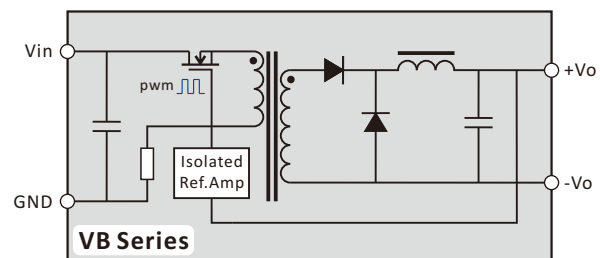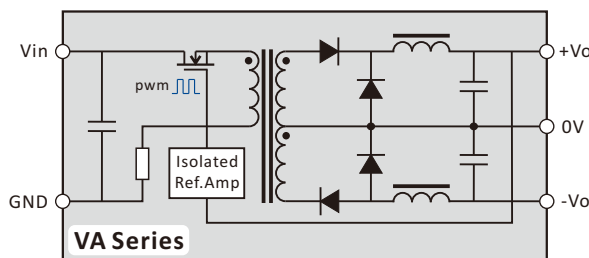

## Selection Guide

### VB1205D-15W

Product Series	Input Voltage	Output Voltage	Package Style	Rated Power
<b>VA:</b> wide input isolated 1.5kVdc dual output <b>VB:</b> wide input isolated 1.5kVdc single output	12 = 9-18 Vdc Range 24 = 18-36 Vdc Range 48 = 36-75 Vdc Range 1A = 72-144 Vdc Range	05 = 5Vdc ±5Vdc 09 = 9Vdc ±9Vdc 12 = 12Vdc ±12Vdc 15 = 15Vdc ±15Vdc 24 = 24Vdc ±24Vdc ↑ VB    ↑ VA	D(Matel): 50.8 × 25.4 × 10.2	15W = 15Watts

# VA/VB\_D-15W Series

15w, wide input, isolated & regulated dual & single output dc-dc converter



## Output Specifications

Item	Test Conditions	Min	Typ	Max	Units
Output Power	Ta=-40-+60°C	1.5		15	W
Line Regulation	100% load, input low to high		±0.1	±0.3	%
Load Regulation	Nominal, 10%-100% load		±0.3	±0.8	
Output Voltage Accuracy	100% load	Positive	±1	±3	
		Negative	±3	±5	
Temperature Drift	100% load			0.03	%/°C
Ripple & Noise	DC-20MHz bandwidth		75	120	mVp-p
Switching Frequency	Nominal, 100% load			500	KHz
Short Circuit Protection		Continuous, Automatic Recovery			

## Isolation Specifications

Item	Test Conditions	Min	Typ	Max	Units
Isolation Resistance	Test at 500Vdc	1000			MΩ
Isolation Voltage	Tested for 1S and 1mA max	1500			Vdc
Isolation Capacitance	100kHz/0.1Vdc		1000		pF



## Common Specification

Item	Test Conditions	Min	Typ	Max	Units
Operating Temperature	Ta>60°C Derating	-45		+85	°C
Maximum Case Temp.			70		
Storage Temperature		-50		+130	
Lead Temperature	1.5mm from case for 10 seconds			+300	
Storage Humidity				95	%
Weight			23		g
Case Material		Aluminium Alloy			

## Absolute Maximum

Input Voltage Maximun	12V input models	0~20Vdc
	24V input models	0~40Vdc
	48V input models	0~80Vdc

## Recommended Circuit

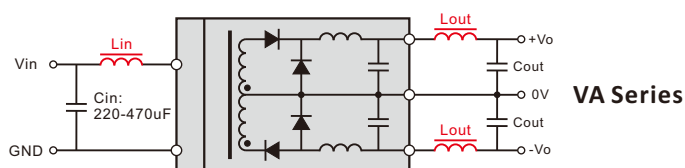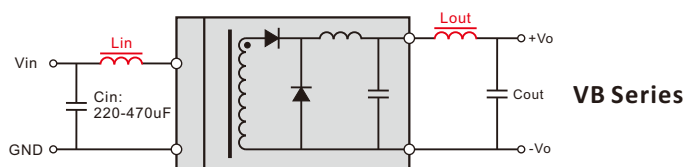


Input and output inductors are not required, if use, the recommended values 4.7-10uH

## Application Note

### 1. The power requirements

When it is used in unregulated power supply, be sure that the fluctuating range of the power supply and the rippled voltage do not exceed the module standard. Input current of power supply should afford the startup current of this kind of DC/DC module.

General:  $I_p < 1.6I_{in-max}$ .



### 2. Input polarity protection


In normal conditions, the input circuit of the series of positive and negative non-reverse polarity protection solution is the input series in a diode.

### 3. Plus capacitance

In order to ensure that at full load conditions can still maintain a good work in the best state, the need for external capacitors. However, excessive capacity and low ESR values may lead to instability in module, or result in lower current-limiting point. Recommended output capacitor value is 100uF/A (here refers to the current rated output current).

### 4. On derating

When the environmental temperature exceeds 60°C the module must be derating use, please refer to derating curve.



5. This product can not be used in parallel, can not hot-swappable.

# VA\_D-15W & VB\_D-15W Series

15w, wide input, isolated & regulated dual & single output dc-dc converter



Product Program										
Model	Input		Output				Eff (%)	Certificate	Pin-Out Config.	Order Status
	Voltage(Vdc)		Voltage(Vdc)	Current(mA)		Ripple (mVp-p)				
	Nominal	Range		Nominal	Max					
VA1205D-15W	12	9-18	±5	±1500	±150		82		Fig.1	ok
VA1209D-15W			±9	±833	±84		83		Fig.1	ok
VA1212D-15W			±12	±625	±63		84		Fig.1	ok
VA1215D-15W			±15	±500	±50		84		Fig.1	ok
VA1224D-15W			±24							
PVA2405D-15W	24	18-36 (9-36)	±5	±1500	±150		83		Fig.1	ok
PVA2409D-15W			±9	±833	±84		85		Fig.1	ok
PVA2412D-15W			±12	±625	±63		85		Fig.1	ok
PVA2415D-15W			±15	±500	±50		85		Fig.1	ok
PVA2424D-15W			±24							
PVA4805D-15W	48	36-75 (18-75)	±5	±1500	±150		83		Fig.1	ok
PVA4809D-15W			±9	±833	±84		86		Fig.1	ok
PVA4812D-15W			±12	±625	±63		86		Fig.1	ok
PVA4815D-15W			±15	±500	±50		86		Fig.1	ok
PVA4824D-15W			±24							
VA1A05D-15W	110	72-144	±5							no
VA1A09D-15W			±9							no
VA1A12D-15W			±12							no
VA1A15D-15W			±15							no
VA1A24D-15W			±24							no
VB1205D-15W	12	9-18	5	3000	300		80		Fig.1	ok
VB1209D-15W			9	1667	167		82		Fig.1	ok
VB1212D-15W			12	1250	125		83		Fig.1	ok
VB1215D-15W			15	1000	100		83		Fig.1	ok
VB1224D-15W			24	625	63		85		Fig.1	ok
PVB2405D-15W	24	18-36 (9-36)	5	3000	300		83		Fig.1	ok
PVB2409D-15W			9	1667	167		83		Fig.1	ok
PVB2412D-15W			12	1250	125		85		Fig.1	ok
PVB2415D-15W			15	1000	100		85		Fig.1	ok
PVB2424D-15W			24	625	63		85		Fig.1	ok
PVB4805D-15W	48	36-75 (18-75)	5	3000	300		83		Fig.1	ok
PVB4809D-15W			9	1667	167		86		Fig.1	ok
PVB4812D-15W			12	1250	125		86		Fig.1	ok
PVB4815D-15W			15	1000	100		86		Fig.1	ok
PVB4824D-15W			24	625	63		86		Fig.1	ok
VB1A05D-15W	110	72-144	5							no
VB1A09D-15W			9							no
VB1A12D-15W			12							no
VB1A15D-15W			15							no
VB1A24D-15W			24							no


Note: The prefix "P" for 4:1 input range

# VA\_D-15W & VB\_D-15W Series

15w, wide input, isolated & regulated dual & single output dc-dc converter

## Outline Dimensions

Fig.1

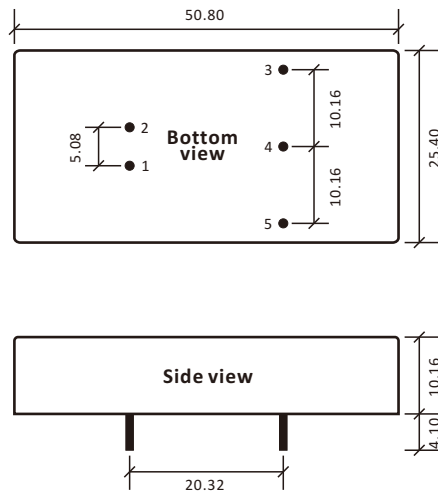

First Angle Projection 

Pin	VB	VA
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	No Pin	0V
5	-Vo	-Vo

Note: all size units mm  
diameter of all terminal 0.8 mm

# File Release Notes

DBN-406 Technical Data Sheet Version



No.	Version	Data	Description
1	V0	2011/11/01	First release
2			
3			
4			
5			

1. All data in addition to particular things, are Ta = 25°C, humidity<75%, nominal input voltage and output measured at rated load;
2. Non-standard models with some of the following indicators may be different from the specific circumstances of the Secretary to direct contact with me;
3. In the use of this manual, if some of them do not quite understand terms please refer to our <<DC / DC Converter Application Guide>>;
4. The Company focused on technological improvements, product specifications and parameter updates without notice, to pay attention to the latest information on website: [www.delus.cn](http://www.delus.cn)

All Delus Corporation's products are manufactured, assembled and tested utilizing ISO9001 quality systems.  
For information regarding Delus Corporation and its products please see [www.delus.cn](http://www.delus.cn)