

### SPECIFICATION



Current Rating: 0.5 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 100mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operating Life: 3000 cycles

### MATERIAL







Housing: LCP, UL94V-0, Black  
 Terminal: Phosphor Bronze  
 Shell: Stainless steel

### ORDER INFORMATION

5 K T F S - 0 8 G 0 N H L 0 3

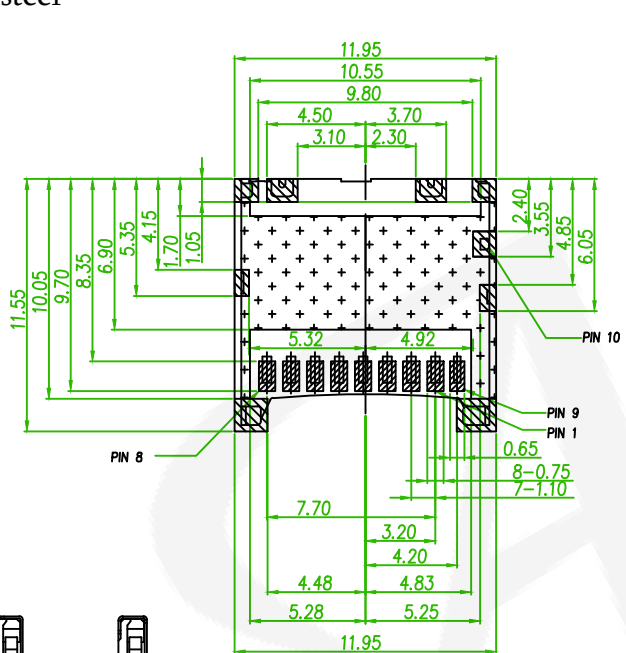

RECOMMEND PCB LAYOUT  
 TOLERANCE: ±0.05  
 TOP VIEW

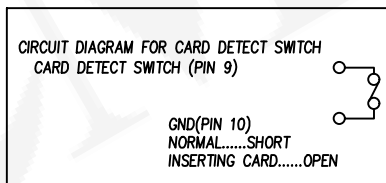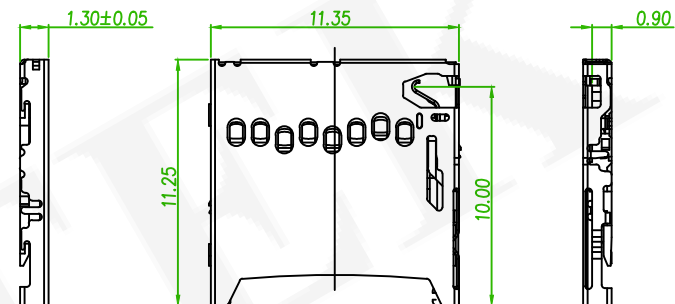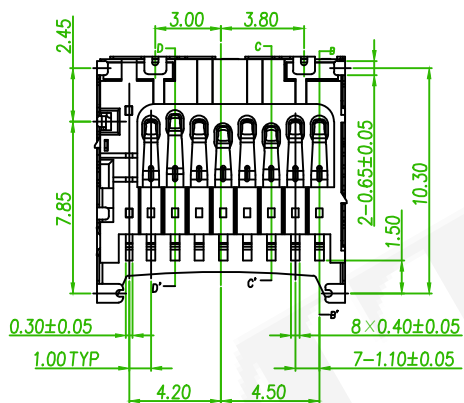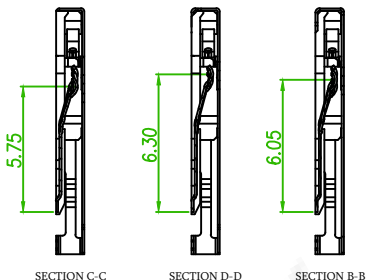

糧德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	MICRO SD CARD PUSH-PULL TYPE			頁數 Page	1/1
品號 PART NO.	△ 5KTFS-08G0NH L03		繪圖 DRAWN	David 2020/05/26	
圖號 DRAWING NO.	GN195-DW135	版本 REV.	C	核對 CHECKED	Josh 2020/05/26
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/05/26
公差 TOLERANCE	.X ±0.30 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	

△x1	QEC NO.:220805 Revise the drawing	Alice	2022/08/15
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE