


序号/RevNo.	名称/Title	文件编号/File No.
1	146M塑料件	QJ/XYT-11174
2	欧式公端端子(短)	QJ/XYT-11170
3	欧式公端端子(中)	QJ/XYT-11171
4	欧式公端端子(长)	QJ/XYT-11172

**Specifications:**


Contact Resistance: 30mΩ max.at DC 100 mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 2AMP

**Dielectric Withstanding**

Voltage: AC 1000V For 1 minute  
 Operating Temperature:-55°C--+105°C  
 Contact: Brass  
 Housing: PBT &30% Glass Fiber(UL 94V-0)

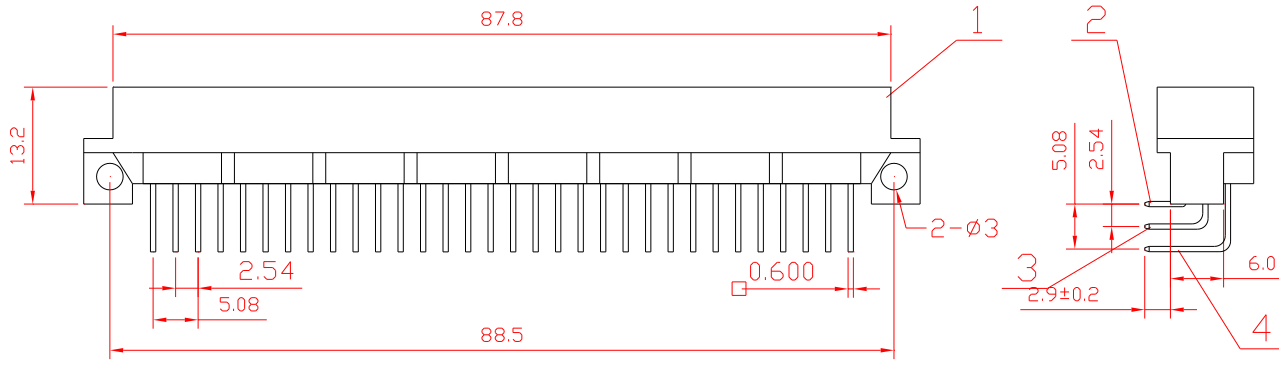

Pitch	Position	Rows with contacts
2.54mm	96	abc
	64	a-c
5.08mm	48	abc
	32	a-c

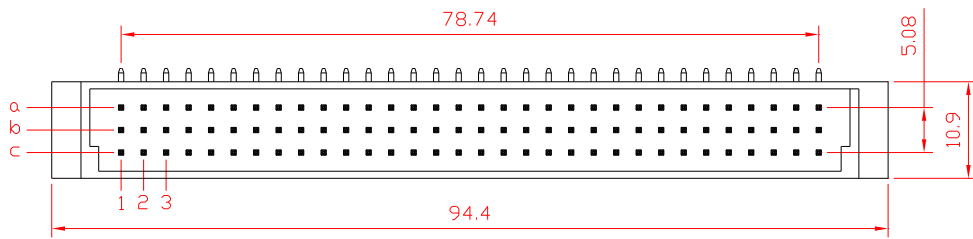

**要求:**

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 x.' ±2' .x ±0.1 .x' ±1' .xx ±0.05 .xx' ±0.5' .xxx ±0.01
		图名/Title	文件编号/File No.	
		146M产品图	QJ/XYT-12102	
		页序/Sheet		
		备注/Remark	波兰	单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date


序号/RevNo.	名称/Title	文件编号/File No.
1	146F塑料件主体	QJ/XYT-11175
2	146F塑料件后盖	QJ/XYT-11176
3	欧式母端端子	QJ/XYT-11173

**Specifications:**


Contact Resistance: 30mΩ max.at DC 100 mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 2AMP

**Dielectric Withstanding**

Voltage: AC 1000V For 1 minute  
 Operating Temperature:-55°C--+105°C  
 Contact: Phosphor Bronze  
 Housing: PBT &30% Glass Fiber(UL 94V-0)

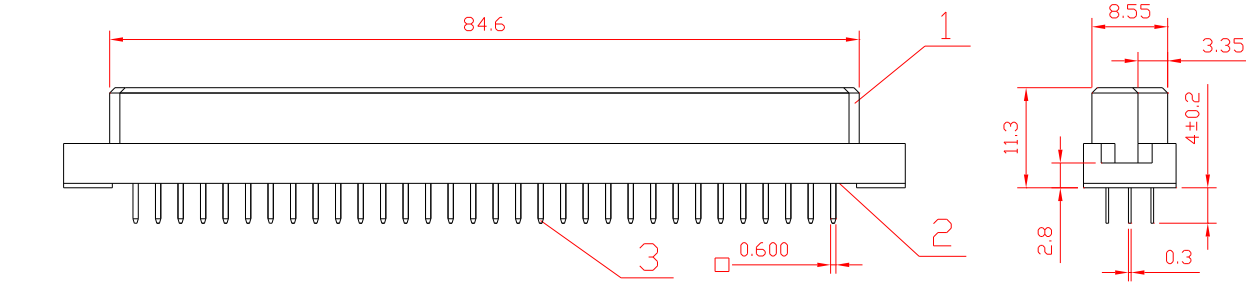

Pitch	Position	Rows with contacts
2.54mm	96	abc
	64	a-c
5.08mm	48	abc
	32	a-c

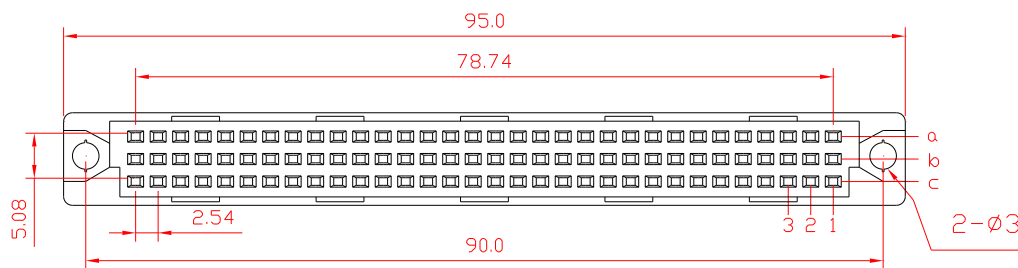

**要求:**

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 x.' ±2' .x ±0.1 .x' ±1' .xx ±0.05 .xx' ±0.5' .xxx ±0.01
		图名/Title	文件编号/File No.	
		146F产品图	QJ/XYT-12103	
		页序/Sheet		
		备注/Remark	波兰	单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date