

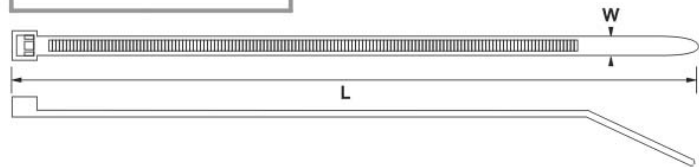


CABLE TIES 紮線帶




ITEM NO.	L		W. mm	MAX.BUNDLE mm	MIN. TENSILE STRENGTH		PACKING PCS/BAG
	mm	Inch			Lbs	kgs	
GT-80M	80	3-3/20	2.4	15	18	8.1	100PCS
GT-100M	100	4	2.5	25	18	8.1	
GT-120M	120	4-3/4	2.5	30	18	8.1	
GT-140M	140	5-1/2	2.5	33	18	8.1	
GT-160M	160	6-5/16	2.5	40	18	8.1	
GT-200M	200	7-7/8	2.5	50	18	8.1	
GT-120I	121	4-3/4	3.6	25	40	18.2	
GT-140I	140	5-1/2	3.6	33	40	18.2	
GT-150I	150	5-9/10	3.6	35	40	18.2	
GT-200I	200	7-7/8	3.6	50	40	18.2	
GT-250I	250	9-7/8	3.6	65	40	18.2	
GT-300I	295	11-3/5	3.6	76	40	18.2	
GT-370I	370	14-1/2	3.6	102	40	18.2	
GT-120ST	120	4-3/4	4.8	24	50	22.2	
GT-160ST	160	6-5/16	4.8	38	50	22.2	
GT-190ST	188	7-1/2	4.8	43	50	22.2	
GT-200ST	200	7-7/8	4.8	50	50	22.2	
GT-250ST	250	9-7/8	4.8	60	50	22.2	
GT-280ST	280	11	4.8	72	50	22.2	
GT-300ST	300	11-4/5	4.8	76	50	22.2	
GT-370ST	370	14-1/2	4.8	102	50	22.2	
GT-390ST	390	15-1/2	4.8	105	50	22.2	
GT-430ST	430	16-9/10	4.8	110	50	22.2	
GT-450ST	450	17-3/4	4.8	116	50	22.2	
GT-530ST	530	20-7/8	4.8	140	50	22.2	
GT-150HD	150	5-9/10	7.6	33	120	54.4	
GT-200HD	200	7-7/8	7.6	50	120	54.4	
GT-300HD	292	11-1/8	7.6	76	120	54.4	
GT-370HD	368	14-1/2	7.6	102	120	54.4	
GT-430HD	430	16-9/10	9.0	110	175	79.4	
GT-530HD	533	21	9.0	140	175	79.4	
GT-710HD	710	28	9.0	190	175	79.4	
GT-780HD	775	30-5/8	9.0	228	175	79.4	
GT-830HD	812	32	9.0	239	175	79.4	
GT-1020HD	1020	40	9.0	295	175	79.4	
GT-230EHD	230	9	13.0	50	250	114.0	
GT-380EHD	380	15	13.0	98	250	114.0	
GT-480EHD	480	18-7/8	13.0	120	250	114.0	
GT-580EHD	580	22-5/8	13.0	152	250	114.0	
GT-730EHD	730	28-2/3	13.0	204	250	114.0	
GT-830EHD	830	32-2/3	13.0	232	250	114.0	
GT-880EHD	880	34-5/8	13.0	248	250	114.0	
GT-1030EHD	1030	40-1/2	13.0	295	250	114.0	

WEATHER RESISTANT NYLON CABLE TIES 抗紫外線耐UV繫線帶



- Carbonate A is added for greater resistance to ultra violet while using outdoor.
- Prolongs useful life of cable tie under sunshine/outdoor application

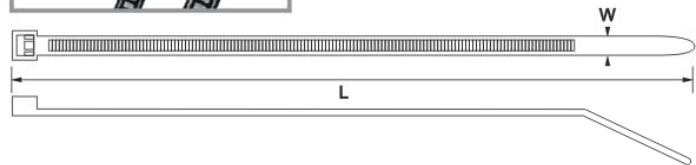

ITEM NO.	L		W. mm	MAX.BUNDLE mm	MIN. TENSILE STRENGTH		PACKING PCS/BAG
	mm	Inch			Lbs	kgs	
GT-80M-UV	80	3-3/20	2.4	15	18	8.1	100PCS
GT-100M-UV	100	4	2.5	25	18	8.1	
GT-120M-UV	120	4-3/4	2.5	30	18	8.1	
GT-140M-UV	140	5-1/2	2.5	33	18	8.1	
GT-160M-UV	160	6-5/16	2.5	40	18	8.1	
GT-200M-UV	200	7-7/8	2.5	50	18	8.1	
GT-120I-UV	121	4-3/4	3.6	25	40	18.2	
GT-140I-UV	140	5-1/2	3.6	33	40	18.2	
GT-150I-UV	150	5-9/10	3.6	35	40	18.2	
GT-200I-UV	200	7-7/8	3.6	50	40	18.2	
GT-250I-UV	250	9-7/8	3.6	65	40	18.2	
GT-300I-UV	295	11-3/5	3.6	76	40	18.2	
GT-370I-UV	370	14-1/2	3.6	102	40	18.2	
GT-120ST-UV	120	4-3/4	4.8	24	50	22.2	
GT-160ST-UV	160	6-5/16	4.8	38	50	22.2	
GT-190ST-UV	188	7-1/2	4.8	43	50	22.2	
GT-200ST-UV	200	7-7/8	4.8	50	50	22.2	
GT-250ST-UV	250	9-7/8	4.8	60	50	22.2	
GT-280ST-UV	280	11	4.8	72	50	22.2	
GT-300ST-UV	300	11-4/5	4.8	76	50	22.2	
GT-370ST-UV	370	14-1/2	4.8	102	50	22.2	
GT-390ST-UV	390	15-1/2	4.8	105	50	22.2	
GT-430ST-UV	430	16-9/10	4.8	110	50	22.2	
GT-450ST-UV	450	17-3/4	4.8	116	50	22.2	
GT-530ST-UV	530	20-7/8	4.8	140	50	22.2	
GT-150HD-UV	150	5-9/10	7.6	33	120	54.4	
GT-200HD-UV	200	7-7/8	7.6	50	120	54.4	
GT-300HD-UV	292	11-1/8	7.6	76	120	54.4	
GT-370HD-UV	368	14-1/2	7.6	102	120	54.4	
GT-430HD-UV	430	16-9/10	9.0	110	175	79.4	
GT-530HD-UV	533	21	9.0	140	175	79.4	
GT-710HD-UV	710	28	9.0	190	175	79.4	
GT-780HD-UV	775	30-5/8	9.0	228	175	79.4	
GT-830HD-UV	812	32	9.0	239	175	79.4	
GT-1020HD-UV	1020	40	9.0	295	175	79.4	
GT-230EHD-UV	230	9	13.0	50	250	114.0	
GT-380EHD-UV	380	15	13.0	98	250	114.0	
GT-480EHD-UV	480	18-7/8	13.0	120	250	114.0	
GT-580EHD-UV	580	22-5/6	13.0	152	250	114.0	
GT-730EHD-UV	730	28-2/3	13.0	204	250	114.0	
GT-830EHD-UV	830	32-2/3	13.0	232	250	114.0	
GT-880EHD-UV	880	34-5/8	13.0	248	250	114.0	
GT-1030EHD-UV	1030	40-1/2	13.0	295	250	114.0	