






REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
2		图面更新	HW	06/12/06
3		增加UL刻字	Ye.j	01/29/07
4		品名、料号增加环保标识“00”	Ye.j	12/08/07

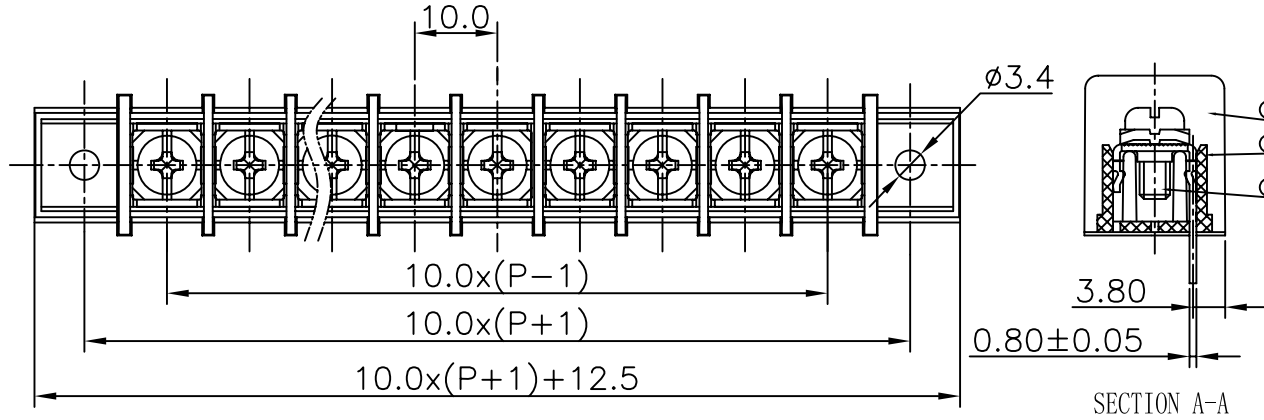

Notes:

1. Pitch:10.0mm Pole:2-24P
2. Rated current:20A
3. Rated voltage:300V
4. Operation temperatures:-40°C~+105°C
5. Withstanding Voltage:AC2000V/1min
6. Insulation Resistance:500MΩ/DC500V
7. Wire Range:22~12AWG
8. Max. Torque Value: 12.24kgf. cm.
9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	—		
6	10	10	30	60	100	150	∩	
10	24	30	60	100	150	—	□	
±0.10		±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
								0.05/0.10

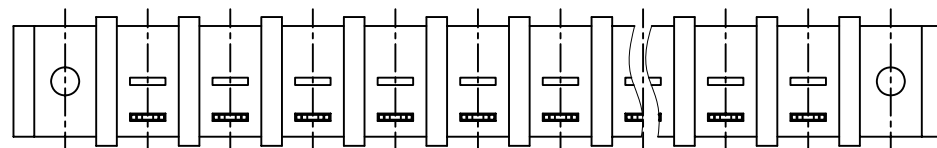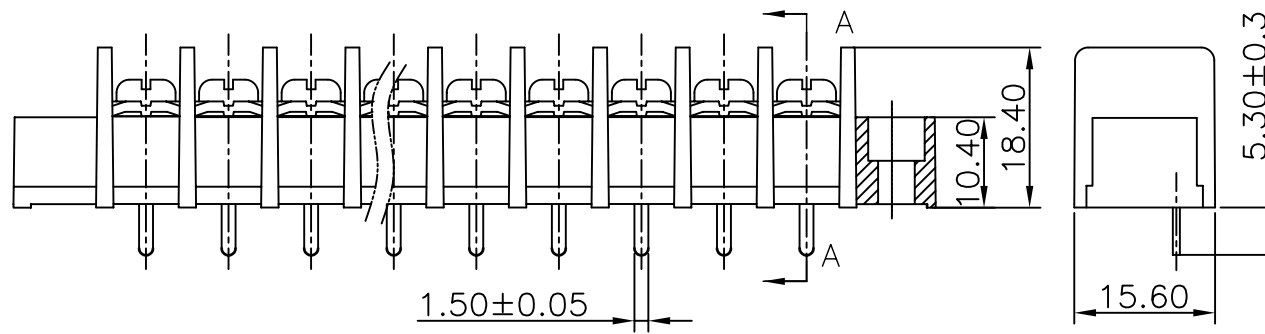

3	4*8 bright Screws	S000000570 (H)	XX	Steel	Ni plated
2	DG45S Pin header	5003B00080 (H)	XX	Brass	SnCe Plated

1	DG55-A housing	5004M0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DETACHED LISTS	MM (INCH)	DFTO WSJ	DATE 11/03/03	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG55S-A-XXP-1Y-00A(H)		
	TOLERANCES EXCEPT AS NOTED		CHKD			DATE
			MFO			DATE
			APPVL			DATE
			MATERIAL :			
ANGLES ± 1°		G.E :		DRAWING NO. DG55S-E03	SIZE A3	
THIRD ANGLE PROJECTION		FINISH :		/PART NO.	REV T4 12/08/07	
SCALE : 1:1			DO NOT SCALE DRAWING		SHEET 1 OF 1	