



## 5EF

### 微型保险丝管(速断型)

### SUB-MINIATURE FUSE-LINKS (QUICK-ACTING)

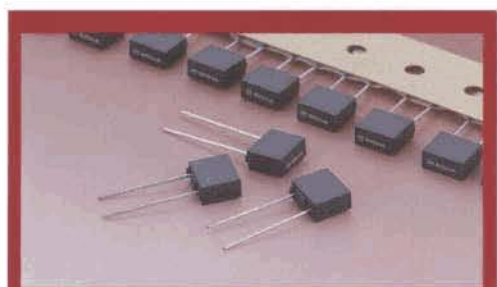

UNIT (单位) : mm



主体材料: 阻燃塑料, UL94-V0  
MATERIALS: THERMOPLASTIC, UL94-V0


目录编号 CATALOG NO.	额定电流 AMPERE RATING	最大电压降 MAX VOLTAGE DROP	认证 APPROVALS						I <sup>2</sup> T 参考值 REFERENCE (A <sup>2</sup> S)
			CCC	SEMKO	VDE	UR	CSA	PSE	
0050H	50mA	850	○	○	○	○	○	0.0012	
0063H	63mA	750	○	○	○	○	○	0.0012	
0080H	80mA	650	○	○	○	○	○	0.0021	
0100H	100mA	600	○	○	○	○	○	0.0032	
0125H	125mA	550	○	○	○	○	○	0.0063	
0160H	160mA	500	○	○	○	○	○	0.011	
0200H	200mA	480	○	○	○	○	○	0.017	
0250H	250mA	440	○	○	○	○	○	0.030	
0315H	315mA	400	○	○	○	○	○	0.049	
0400H	400mA	370	○	○	○	○	○	0.08	
0500H	500mA	350	○	○	○	○	○	0.13	
0630H	630mA	320	○	○	○	○	○	0.16	
0750H	750mA	320	○	○	○	○	○	0.18	
0800H	800mA	300	○	○	○	○	○	0.21	
010H	1A	280	○	○	○	○	●	0.37	
013H	1.25A	280	○	○	○	○	○	0.60	
016H	1.6A	250	○	○	○	○	○	1.3	
020H	2A	240	○	○	○	○	○	2.1	
025H	2.5A	200	○	○	○	○	○	3.1	
032H	3.15A	180	○	○	○	○	○	5.5	
040H	4A	160	○	○	○	○	○	9.4	
050H	5A	160	○	○	○	○	○	17	
063H	6.3A	160	○	○	○	○	○	29	

H DENOTES FOR 250V (H表示250V)

○ DENOTES FOR PENDING (○表示申请中)

● DENOTES FOR APPROVED (●表示已取得认证)

I-T CHARACTERISTICS CURVE  
电流-时间曲线图

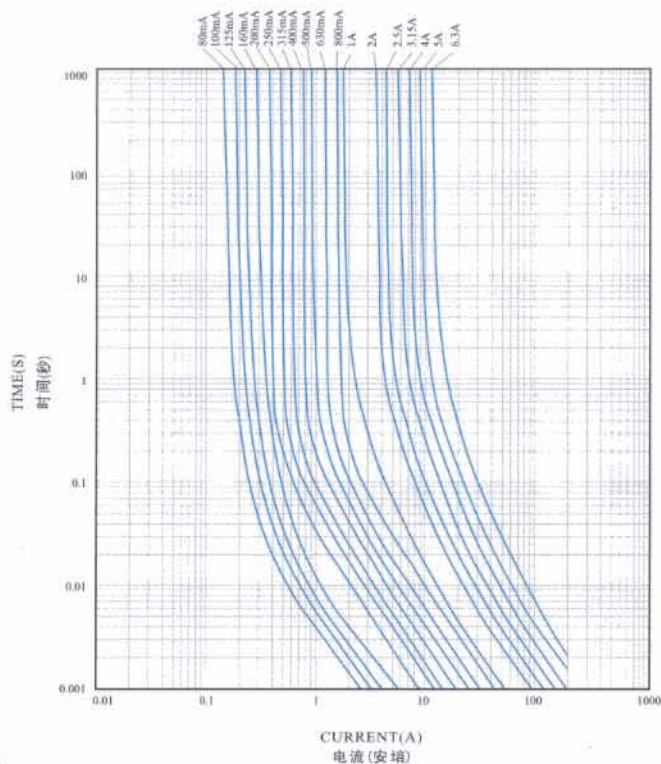

分断电流:

BREAKING CAPACITY:

CCC/SEMKO/VDE: 35A OR 10In WHICHEVER IS GREATER  
UR/CSA/PSE: 100A 250V AC

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME
2.1In	Max (最慢)	30min
2.75In	Min (最快)	10ms
	Max (最慢)	3sec
4In	Min (最快)	3ms
	Max (最慢)	300ms
10In	Max (最慢)	20ms