


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加VDE, UL, CE刻字	Zengy	01/13/09	

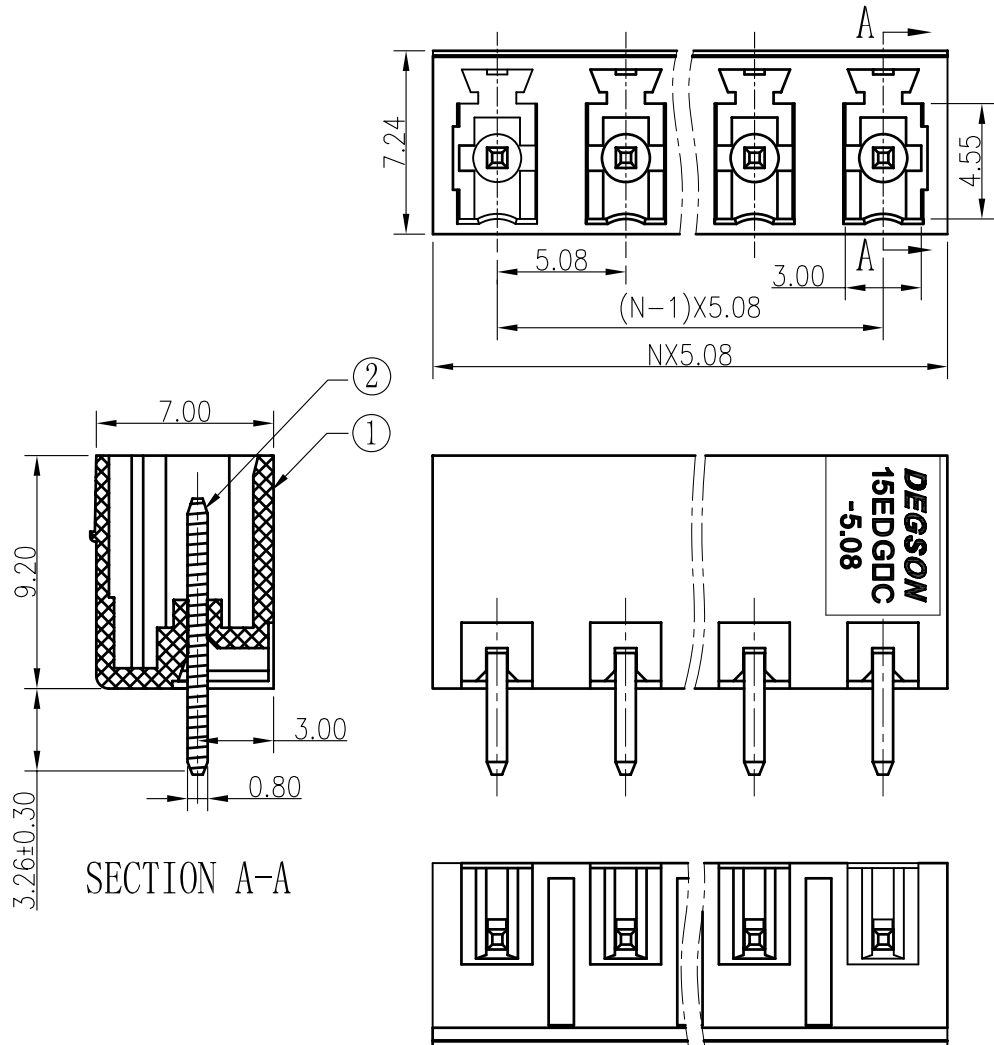

SECTION A-A

Notes:

- Pitch:5.08mm ,Poles:2-12P
- Rated voltage/current:UL 300V/8A  
VDE 250V/7A
- Operation temperatures:-40℃~+105℃
- Withstanding Voltage:AC2000V/1Min
- Insulation Resistance:5000MΩ/DC1000V
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						
	over 6	over 10	over 30	over 60	over 100	over 150		—	
to 6	to 10	to 24	to 30	to 60	to 100	to 150		⌒	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/1.0	

2	15EDGV Pin header	1002B00010 (H)	XX	Brass	SnCe plated
1	15EDGVC-5.08-Housing	1172A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Zhuwm	DATE 12/14/07	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME 15EDGVC-5.08-XXP-1Y-00A (H) DRAWING NO. 15EDGVC-5.08-E01 SIZE A3 REV T1 01/13/09 /PART NO. SCALE : 1:1 DO NOT SCALE DRAWING SHEET 1 OF 1	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
	MM	MFO	DATE		
	.0 ±	APPVL	DATE		
.00 ±	MATERIAL :				
.000 ±	G.E :				
ANGLES ± 1°	FINISH :				
THIRD ANGLE PROJECTION	SCALE : 1:1				