



DG2001-3.0




技术参数 Technical Data

APPROVAL:

型号 Model	线径 Wire range	线数 Poles	EN60947技术参数(EN60947datasheet)		UL技术参数(UL datasheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DG2001	0.14-0.34mm ² /26-22AWG/SOL	01P-03P	160	3	250	3

应用行业 Application

LED照明行业 LED lighting

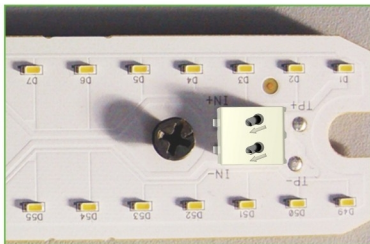

产品包装方式 Packing

Product model

DG2001-01P
DG2001-02P
DG2001-03P

Pcs./Pkt.

2650
1750
1750

Pcs./Carton

31800
21000
21000




产品订货 How to order

DG2001-3.0 - X X P - 1 1 - 0 1 AH
Standard



Series No. No. of Pole

1 Single pitch
2 Double pitch

General Color
1 Grey
PANTONE 429C
DEGSON 41

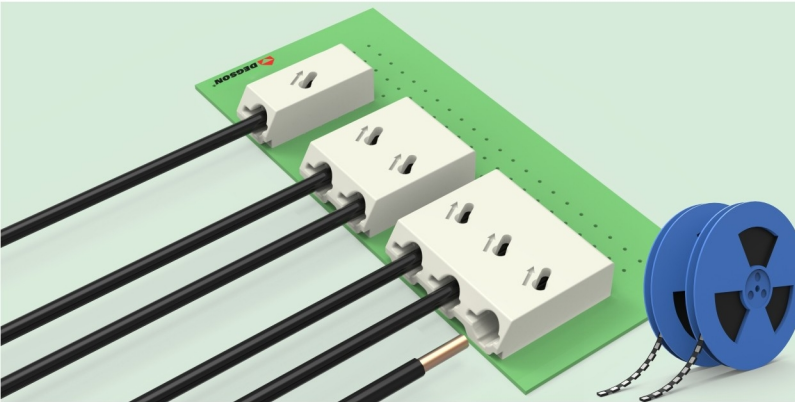

DG2003-6.0




技术参数 Technical Data

APPROVAL:

型号 Model	线径 Wire range	线数 Poles	EN60947技术参数(EN60947datasheet)		UL技术参数(UL datasheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DG2003	0.2-1.5mm ² /24-16AWG/SOL	01P-03P	320	17.5	300	10

应用行业 Application

LED照明行业 LED lighting



产品包装方式 Packing

Product model

DG2003-01P
DG2003-02P
DG2003-03P

Pcs./Pkt.

900
700
450

Pcs./Carton

8100
6300
4050



产品订货 How to order

DG2003-6.0 - X X P - 1 1 - 0 1 AH
Standard

Series No. No. of Pole

1 Single pitch
2 Double pitch

General Color
1 Grey
PANTONE 429C
DEGSON 41