

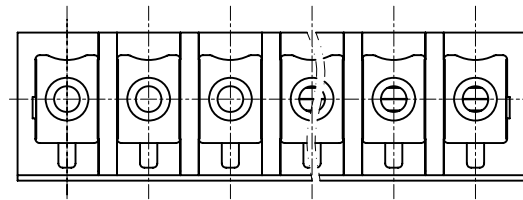
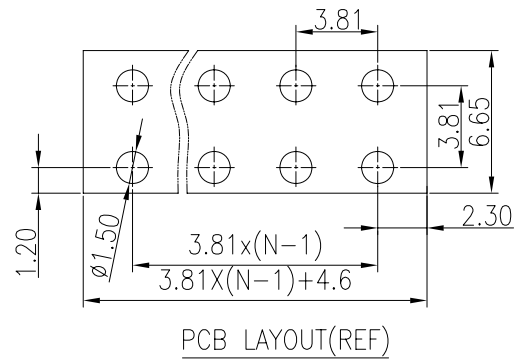
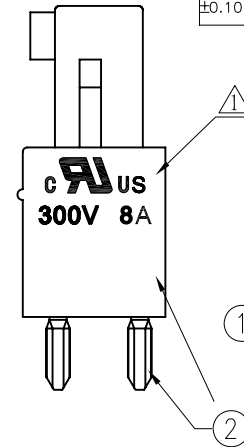


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△1	10-0068	增加UL刻字及参数	GHY	04/07/10

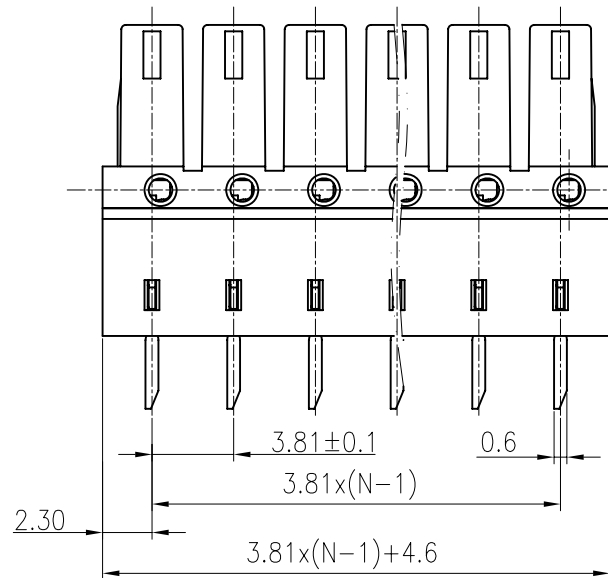

- Notes:
- pitch:3.81mm poles:2-24p
 - Rated voltage/current: UL 300V/8A
IEC 250V/7A
 - Insulation Resistance:5000MΩ/DC1000V
 - Withstanding voltage: AC2000V/1Min
 - Temp. Range:-40° C~+105° C
 - Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
							0.05/10

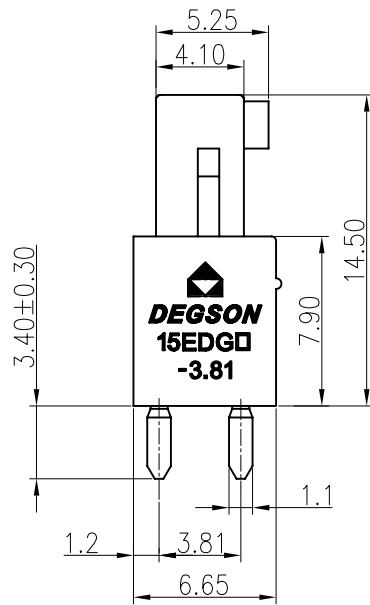

1	15EDGB-3.81-Housng	1205A0YXXA(H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DETACHED LISTS	MM (INCH)	DFTO Zhwmm	DATE 10/17/08	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME 15EDGB-3.81-XXP-1Y-00A(H) DRAWING NO. 15EDGB-3.81-E01 /PART NO. SIZE A3 REV T1 04/07/10		
	TOLERANCES EXCEPT AS NOTED		CHKD			DATE
			MFO			DATE
			APPVL			DATE
			MATERIAL :			
ANGLES ± 1°		G.E :		DO NOT SCALE DRAWING		
THIRD ANGLE PROJECTION		FINISH :		SHEET 1 OF 1		
		SCALE : 1:1				

2	15EDGKB-3.81-Clamp	1205B00020(H)	XX	Phosphor bronze	Snce plated
---	--------------------	---------------	----	-----------------	-------------