


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/11/14'		

Notes:

- Material:
 - Housing: High Temperature LCP, UL94V-0 Roted Color: Black.
 - Orbit: PA46, UL94V-0, Color: Black.
 - Contacts: Copper Alloy.
 - Shell: Stainless Steel.
- Finsh:
 - Solder Area: Matte Tin.
 - Contact Area: Gold Over Nickel.
- Specifications:
 - Operate Temperature: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$
 - Insulation Resistance: 1000M Ω Min.
 - Contact Resistance: 30m Ω max.
 - Withstanding Voltage: 500V AC 1min.
 - Operating Voltage: 30V AC/DC.
 - Current Rating: 1A
- Product Number Code:

DS1139-07 - XX X X X X X X

- Packing Type
R: Tape On Reel
- Shell Plating
S: Stainless
- Housing color
B: Black
- Contact Plating
4: Selective 3u" gold
- Mounting type
S: SMT type
- Connector type
S: Socket
- No. of contacts
10:10pin

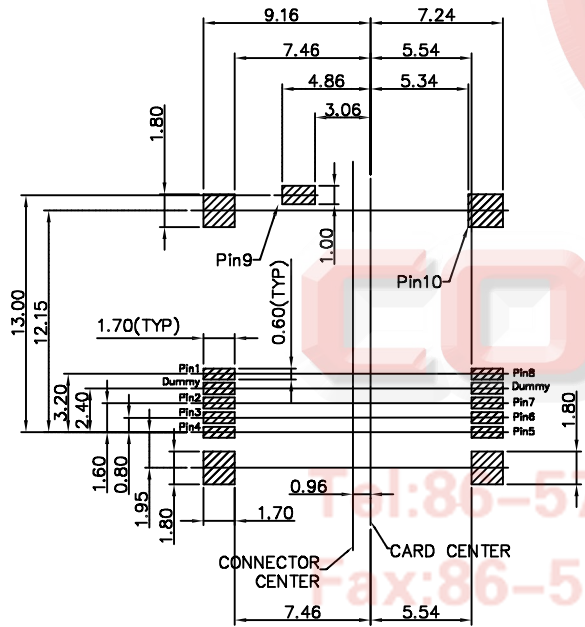

PIN NO.		MICRO SD
PIN 1	DAT2	1P
PIN 2	CD/DAT3	2P
PIN 3	CMD	3P
PIN 4	VDD	4P
PIN 5	CLK	5P
PIN 6	VSS	6P
PIN 7	DAT0	7P
PIN 8	DAT1	8P
PIN 9	CARD DETECT	
PIN 10	CARD DETECT	

Tel: 86-574-63510817
 Fax: 86-574-63510817
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	Micro SD Card Reverse H=1.85mm SMT Type	
X.	± 0.60	X.	$\pm 5^{\circ}$				
.X	± 0.38	.X	$\pm 3^{\circ}$	mm			
.XX	± 0.25	.XX	$\pm 2^{\circ}$	A4	SERIES	DS1139-07 Series	
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY® CONNFLY ELECTRONIC CO., LTD			
SCALE		1:1	SHEET 2 OF 2				
DRAWING NO.		C-DS1139-07-XXXXXX-A					